


DUAL VOLTAGE COMPARATOR

LM393

FEATURES

- Single Supply Operation : 2V to 36V
- Dual Supply Operation : $\pm 1V$ to $\pm 18V$
- Allow Comparison of Voltages Near Ground Potential
- Low Current Drain 800 μA Typ
- Compatible with all Forms of Logic
- Low Input Bias Current 25 μA Typ
- Low Input Offset Current $\pm 5\mu A$ Typ
- Low Offset Voltage $\pm 1mV$ Typ

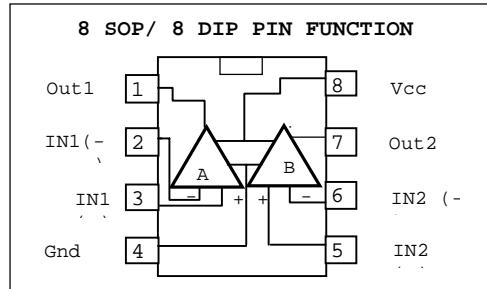

ORDERING INFORMATION

Device	Package
LM393D	8 SOP
LM393N	8 DIP


DESCRIPTION

The LM393 series consists of two independent precision voltage comparators with an offset voltage specification as low as 2.0 μV max. for two comparators which were designed specifically to operate from a single power supply over a wide range of voltages. Operation from split power supplies is also possible and the low power supply current drain is independent of the magnitude of the power supply voltage.

These comparators also have a unique characteristic in that the input common-mode voltage range includes ground, even though operated from a single power supply voltage.

The LM393 series was designed to directly interface with TTL and CMOS. When operated from both plus and minus power supplies, the LM393 series will directly interface with MOS logic where their low power drain is a distinct advantage over standard comparators.

EQUIVALENT CIRCUIT

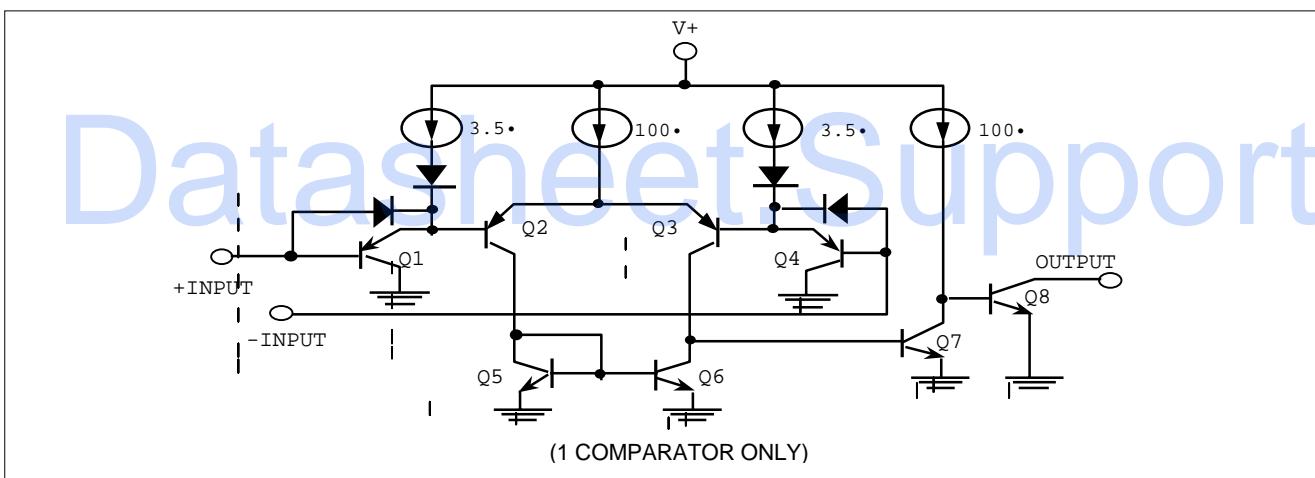

HTC

For more information, or to purchase call E.C.C. Inc @ 1-800-214-8769

DUAL VOLTAGE COMPARATOR

LM393

ABSOLUTE MAXIMUM RATINGS

CHARACTERISTIC	SYMBOL	VALUE	UNIT
Power Supply Voltage	V_{CC}	± 18 or 32	V
Differential Input Voltage	$V_{I(DIFF)}$	32	V
Input Voltage	V_I	-0.3 to +32	V
Output Short Circuit to GND		Continuous	
Power Dissipation	P_D	570	•
Operating Temperature Range	T_{OPR}	0~+70	•
Storage Temperature Range	T_{STG}	-65 to +150	•

Electrical characteristics at specified free-air temperature, $V_{CC}=5V$ (unless otherwise noted)

PARAMETER	TEST CONDITIONS*	LM393			UNIT
		MIN	TYP	MAX	
V_{IO} Input Offset Voltage	$V_{CC}=5V$ to 30V $V_{ICR} = V_{ICR\ MIN},$ $V_O=1.4V$	25•	2	5	•
		Full Range	9		
I_{IO} Input Offset Current	$V_O=1.4V$	25•	5	50	•
		Full Range	150		
I_{IB} Input Bias Current	$V_O=1.4V$	25•	-25	-250	•
		Full Range	-400		
V_{ICR} Common-Mode Input Voltage Range**		25•	0 to $V_{CC}\ 1.5$		V
		Full Range	0 to $V_{CC}\ 2$		
A_{VD} Large-Signal Differential Voltage Amplification	$V_{CC}=15V,$ $V_O=1.4V$ to 11.4V, $R_L=15\ \Omega$ to V_{CC}	25•	50	200	V/•
I_{OH} High-Level Output Current	$V_{OH}=5V, V_{ID}=1V$ $V_{OH}=30V, V_{ID}=1V$	25•	0.1	50	•
		Full Range	1		
V_{OL} Low-Level Output Voltage	$I_{OL}=4\ \mu A, V_{ID}=-1V$	25•	150	400	•
		Full Range	700		
I_{OL} Low-Level Output Current	$V_{OL}=1.5V, V_{ID}=-1V$	25•	6		•
I_{CC} Supply Current	$RL=\bullet$ $V_{CC}=5V$ $V_{CC}=30V$	25•	0.8	1	•
		Full Range	2.5		

* Full range (MIN to MAX), for LM393 is 0• to 70•. All characteristics are measured with zero common-mode input voltage unless otherwise specified.

** The voltage at either input or common-mode should not be allowed to go negative by more than 0.3V.

The upper end of the common-mode voltage range is $V_{CC} - 1.5V$, but either or both inputs can go to 30V without damage.

Switching characteristics, $V_{CC}=5V, T_A=25\ ^\circ C$

PARAMETER	TEST CONDITION	MIN	LM393 TYP	MAX	UNIT
Response Time	RL Connected to 5V Through 5.1•, $C_L=15\ pF$ *(See Note 1) Overdrive TTL-Level Input Step	100•	100• Input Step with 5- Overdrive TTL-Level Input Step	1.3 0.3	•

* C_L includes probe and jig capacitance.

Note 1 : The response time specified is the interval between the input step function and the instant when the output crosses 1.4V.


HTC

For more information, or to purchase call E.C.C. Inc @ 1-800-214-8769

LOW POWER DUAL VOLTAGE COMPARATOR

LM393

TYPICAL PERFORMANCE CHARACTERISTICS

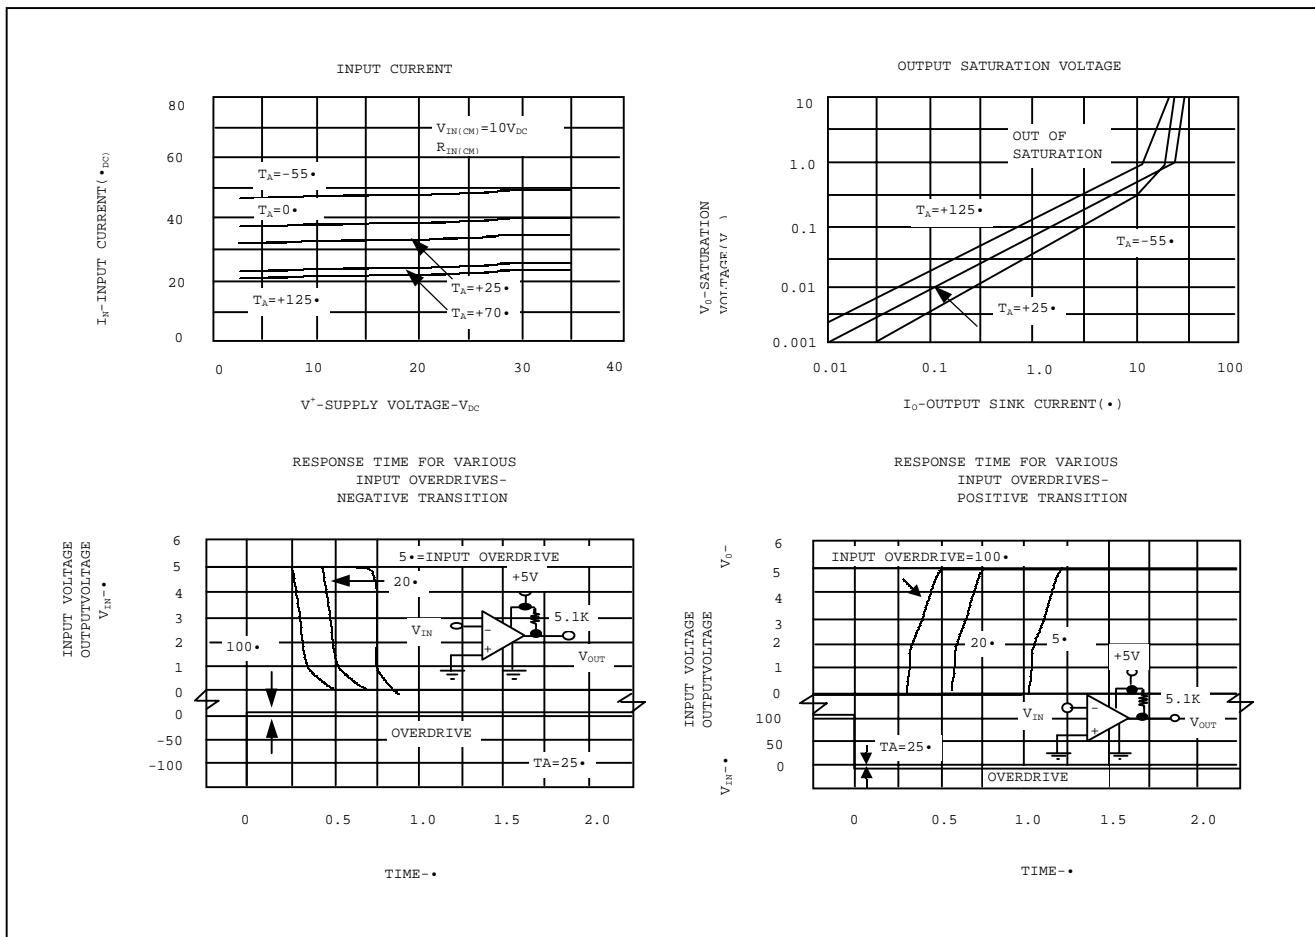


HTC

For more information, or to purchase call E.C.C. Inc @ 1-800-214-8769

LOW POWER DUAL VOLTAGE COMPARATOR

LM393

TYPICAL APPLICATIONS

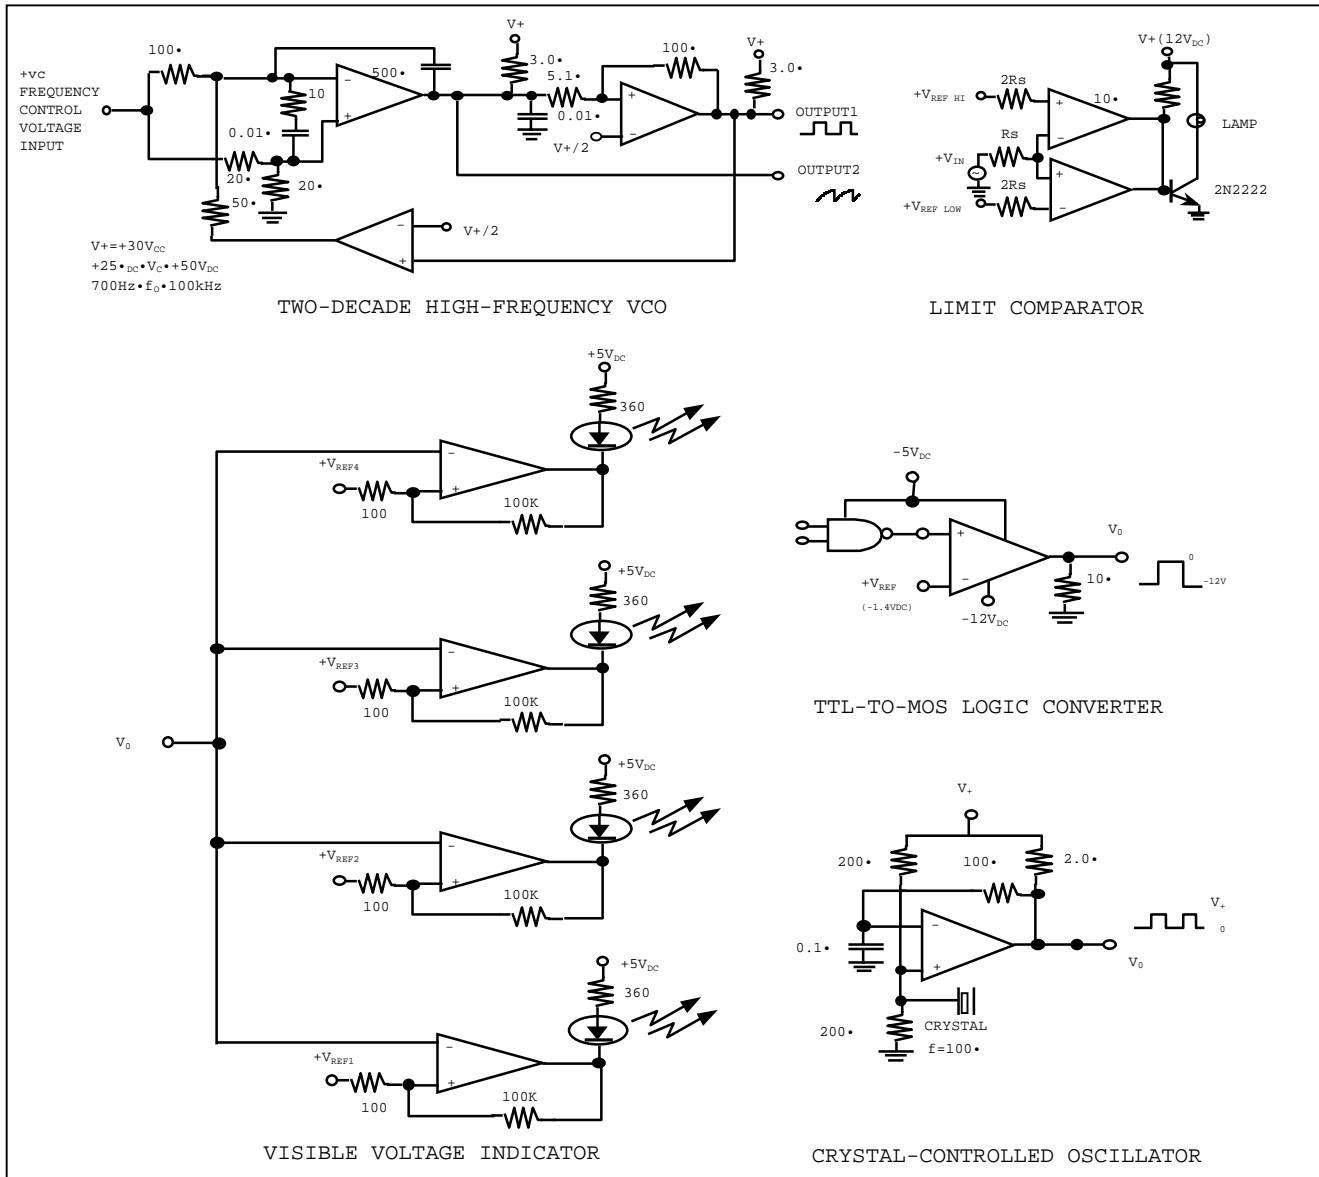

HTC

For more information, or to purchase call E.C.C. Inc @ 1-800-214-8769