


Pin Grid Array Adapters

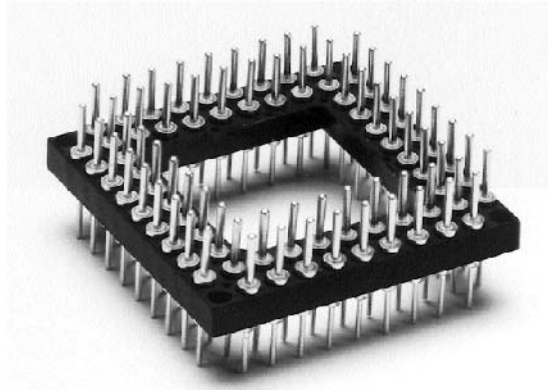

Features:

- Screw machined terminals.
- Easily customized to fit your application.

Terminals:

Brass - Copper Alloy (C36000)
ASTM-B-16

Plating:

Gold over Nickel or
Tin-Lead over Nickel

Gold per MIL-G-45204

Tin-Lead per MIL-P-81728


Nickel per QQ-N-290

Body Material:

HCA - High Temp. Glass Filled
Thermoplastic (P.P.S.), U.L. Rated 94V-O,
-60°C to 260°C (-76°F to 500°F)

KA - Polyimide Film, Temperature range
-269°C to 400°C (-452°F to 752°F)

How To Order

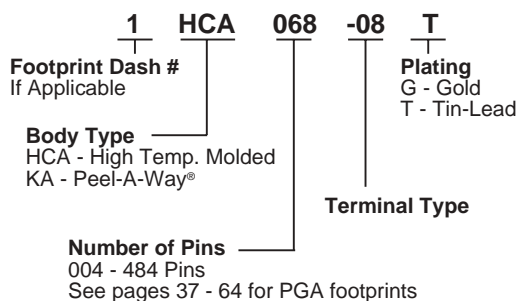


Standard Quick Turn Terminals




Type -79

Peel-A-Way Only®




Type -80

Peel-A-Way Only®




Type -81


Peel-A-Way Only®




Type -08




Type -68




Type -43



Type -185



Type -42



Quick turn delivery

available on standard terminal types.

Additional terminal types available.
See terminal section for detailed terminal information.

Peel-A-Way® covered by patent rights issued and/or pending.