

SPECIFICATIONS

Mechanical

Contact Retention Force: 1.0Kg min.

Electrical

Voltage Rating: 750V

Current Rating: 1A

Contact Resistance: 45mΩ max.

Dielectrical Withstanding Voltage: 1000V

Insulation Resistance: 1000MΩ min.

Physical


Housing: LCP, UL 94-0, Ivory White

Contact: Phosphor Bronze


Plating: See "ORDERING INFORMATION"

FUTURE BUS CONNECTOR

**1F Series,
Plug. Press Fit Type
2.0mm Pitch
4 Rows**

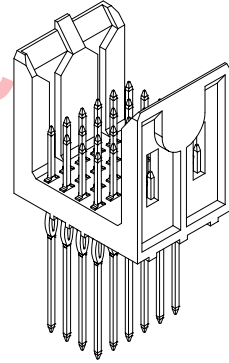

DRAWING

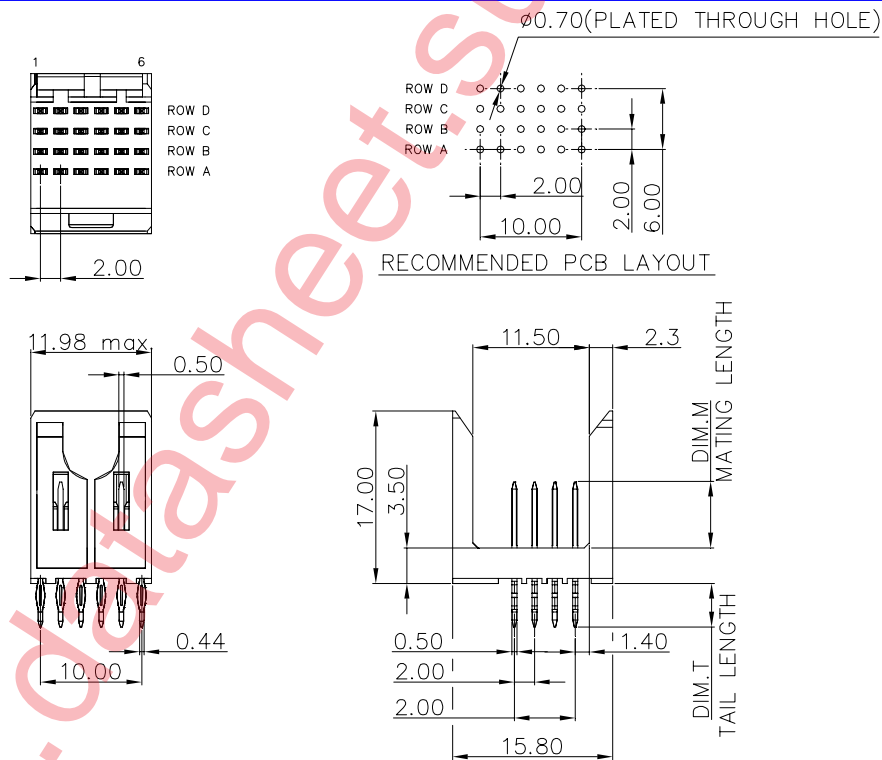

ORDERING INFORMATION

PRODUCT NO.: 1 F 1 1 0 2 4 * - P ** B S * - * *

POS. NO.:
024=024 pos.
Mating Area Plating:
1=GOLD FLASH
3=0.76um(30u")MIN. GOLD PLATING
5=1.27um(50u")MIN. GOLD PLATING
6=0.25um(10u")MIN. GOLD PLATING
A=0.76um(30u")MIN. FPT PLATING,
0.25um(10u")MIN. GOLD INCLUDED
Tail Style:
P=Press Fit

Lead Free Code:
N=None
F=Lead Free
Package Type:
A=Tube
Extension Code:
N,T,L,M
BODY STYLE:
BS=Selective pin, long pin, wide body
Selective Pin Pattern
(Detail Please Refer To Customer Drawing)