

**SCHOTTKY BARRIER RECTIFIERS**

REVERSE VOLTAGE - 30 to 60 Volts  
FORWARD CURRENT - 30 Amperes


**FEATURES**

- Metal of silicon rectifier, majority carrier conduction
- Guard ring for transient protection
- Low power loss, high efficiency
- High current capability, low VF
- High surge capacity
- Plastic package has UL flammability classification 94V-0
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

**MECHANICAL DATA**

- Case : TO-220AB molded plastic
- Polarity : As marked on the body
- Weight : 0.08 ounces, 2.24 grams
- Mounting position : any
- Max. mounting torque = 0.5 N.m (5.1 Kgf.cm)

**TO-220AB**

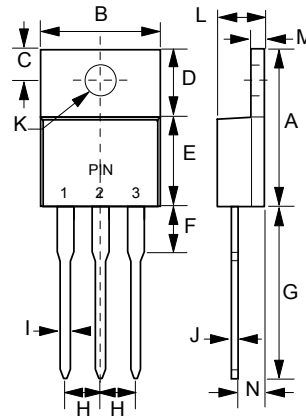

TO-220AB		
DIM.	MIN.	MAX.
A	14.22	15.88
B	9.65	10.67
C	2.54	3.43
D	5.84	6.86
E	8.26	9.28
F	-	6.35
G	12.70	14.73
H	2.29	2.79
I	0.51	1.14
J	0.30	0.64
K	3.53 $\varnothing$	4.09 $\varnothing$
L	3.56	4.83
M	1.14	1.40
N	2.03	2.92

All Dimensions in millimeter



**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25°C ambient temperature unless otherwise specified.  
Single phase, half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	MBR 2530CT	MBR 2535CT	MBR 2540CT	MBR 2545CT	MBR 2550CT	MBR 2560CT	UNIT
Maximum Recurrent Peak Reverse Voltage	VRRM	30	35	40	45	50	60	V
Maximum RMS Voltage	VRMS	21	24.5	28	31.5	35	42	V
Maximum DC Blocking Voltage	VDC	30	35	40	45	50	60	V
Maximum Average Forward Rectified Current @Tc=130°C	I(AV)	30						A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load	IFSM	150						A
Maximum forward Voltage (per leg) at (Note 1)	VF	IF = 15A, @Tj=25°C IF = 15A, @Tj=125°C IF = 30A, @Tj=25°C IF = 30A, @Tj=125°C	- - 0.82 0.73				0.75 0.65 - -	V
Maximum DC Reverse Current at Rated DC Blocking Voltage	IR	@Tj=25°C @Tj=125°C	0.2 40.0				1.0 50.0	mA
Voltage rate of change (Rated VR)	dv/dt	10,000						V/us
Typical Junction Capacitance per element (Note 2)	Cj	450						pF
Typical Thermal Resistance (Note 3)	RθJC	1.5						°C/W
Operating Temperature Range	Tj	-55 to +150						°C
Storage Temperature Range	TSTG	-55 to +175						°C

- NOTES : 1. 300us Pulse Width, 2% Duty Cycle.  
2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.  
3. Thermal Resistance Junction to Case.

