
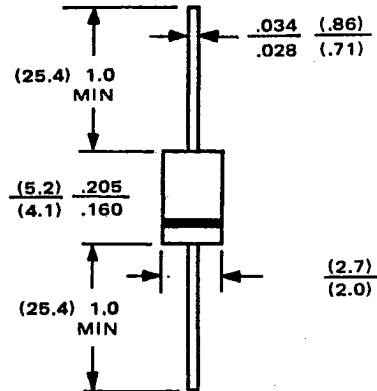


Silicon Rectifier

1 Amp Glass Passivated

 <p>FEATURES</p> <ul style="list-style-type: none"> • Low cost • Diffused junction • Low leakage • Low forward voltage drop • High current capability and high reliability • Easily cleaned with Freon, alcohol, Chloroethene and similar solvents • The plastic material carries U/L recognition 94V-0 <p>MECHANICAL DATA</p> <p>Case: JEDEC DO-41, molded Plastic Terminals: Plated axial leads, solderable per MIL-STD-202 Method 208 Polarity: Color band denotes cathode end Weight: 0.012 ounce, 0.3 gram Mounting position: Any</p>	<p>VOLTAGE RANGE 50 to 1000 Volts</p> <p>CURRENT 1.0 Ampere</p> <p style="text-align: center;">DO-41</p>  <p style="text-align: center;">All dimensions in inches and (millimeters)</p>
--	---

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

	1N4001 GP	1N4002 GP	1N4003 GP	1N4004 GP	1N4005 GP	1N4006 GP	1N4007 GP	UNITS
*Maximum recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000	V
*Maximum RMS Voltage	35	70	140	280	420	560	700	V
*Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	V
*Maximum Average Forward Rectified Current 3/8" Lead Length at T _A = 75°C	1.0							A
*Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	50							A
*Maximum Forward Voltage at 1.0A DC	1.0							V
*Maximum DC Reverse Current at Rated DC Blocking Voltage	5.0 50.0							μA μA
Typical Junction Capacitance (Note 1)	20							pF
Typical Thermal Resistance (Note 2)	50							°C/W
Operating Temperature Range	-65 to +175							°C
Storage Temperature Range	-65 to +175							°C

NOTES: 1. As measured on a Boonton Capacitance Bridge, Model 75A-S8 at 1.0 MHz and applied reverse voltage of 4.0V DC.
 2. Thermal Resistance Junction to Ambient.
 * JEDEC registered values.

Collmer Semiconductor, Inc.

14368 PROTON RD. • DALLAS, TEXAS 75244 • 214/233-1589
 TWX: 910-860-5462 • FAX 214/233-0481

CSD67 • June 1985

2238792 COLLMER SEMICONDUCTOR INC

74C 00706 D T-01-13

RATING AND CHARACTERISTIC CURVES
1N4001 thru 1N4007

Fig. 1 – TYPICAL FORWARD CHARACTERISTICS.

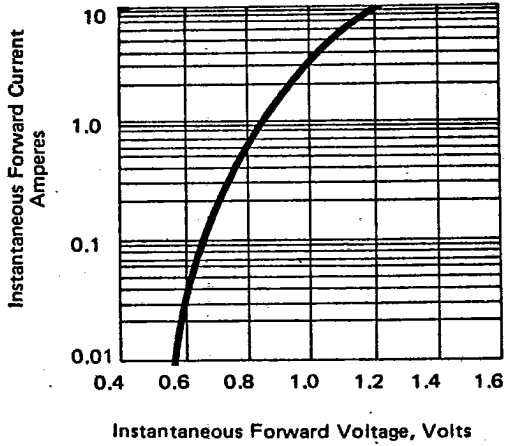


Fig. 2 – JUNCTION CAPACITANCE (See Application Note 1).

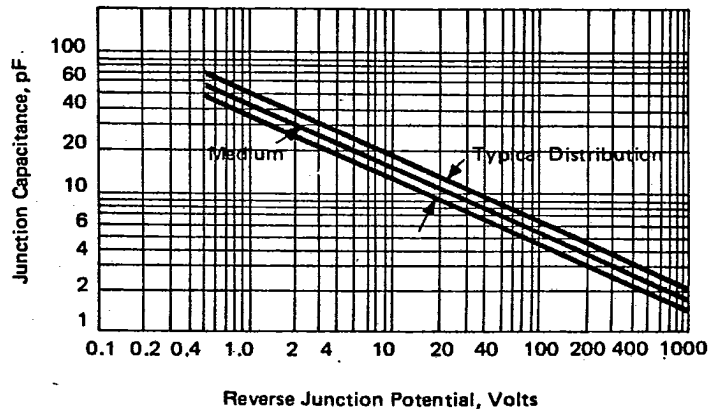


Fig. 3 – MAXIMUM OVERLOAD SURGE-CURRENT


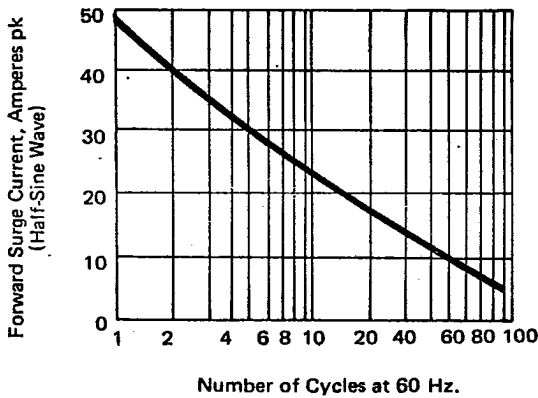


Fig. 4 – FORWARD DERATING CURVE



Collmer Semiconductor, Inc.

14368 PROTON RD. • DALLAS, TEXAS 75244 • 214/233-1589
TWX: 910-860-5462 • FAX 214/233-0481

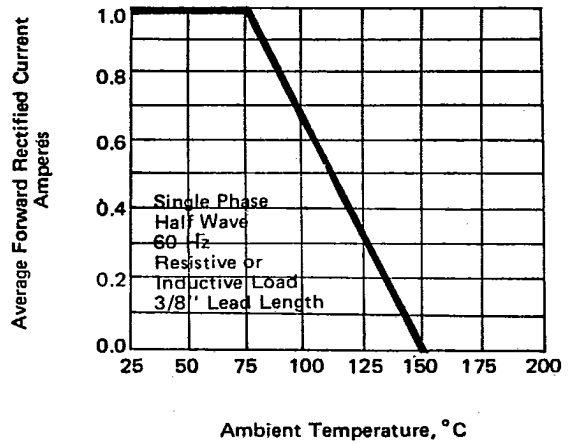