



# DF005G THRU DF10G    DF005S THRU DF10S


## SINGLE PHASE 1.0 AMP GLASS PASSIVATED BRIDGE RECTIFIERS



### FEATURES

- \* Ideal for printed circuit board
- \* Reliable low cost construction utilizing molded plastic technique
- \* High surge current capability
- \* Small size, simple installation
- \* Leads solderable per MIL-STD-202, method 208

**VOLTAGE RANGE**  
50 to 1000 Volts  
**CURRENT**  
1.0 Ampere

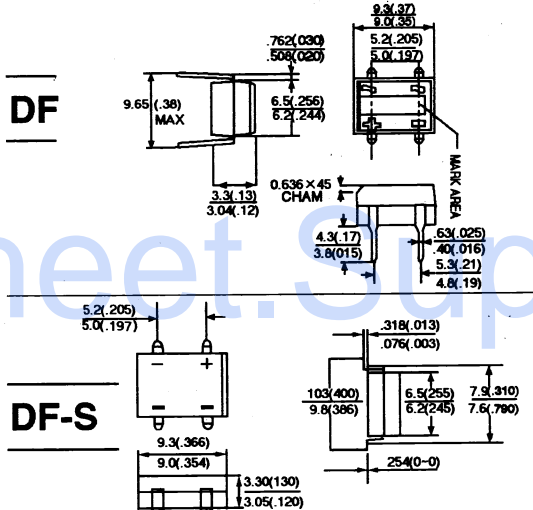

Dimensions in millimeters and (inches)

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.  
Single phase, half wave, 60 Hz, resistive or inductive load.  
For capacitive load, derate current by 20%

TYPE NUMBER	SYMBOLS	DF005G	DF01G	DF02G	DF04G	DF06G	DF08G	DF10G	UNITS
		DF005S	DF01S	DF02S	DF04S	DF06S	DF08S	DF10S	
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS Bridge Input Voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum D. C Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @ $T_A = 40^\circ C$	$I_{F(AV)}$	1.0							A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	$I_{FSM}$	30							A
Maximum Forward Voltage Drop per element @ 1.0A	$V_F$	1.10							V
Maximum Reverse Current at Rated @ $T_A = 25^\circ C$ D. C. Blocking Voltage per element @ $T_A = 125^\circ C$	$I_R$	10 500							$\mu A$ $\mu A$
Operating Temperature Range	$T_J$	- 55 to + 125							$^\circ C$
Storage Temperature Range	$T_{STG}$	- 55 to + 150							$^\circ C$

# RATINGS AND CHARACTERISTIC CURVES ( DF005G THRU DF10G ) ( DF005S THRU DF10S )

FIG. 1 - DERATING CURVE FOR OUTPUT CURRENT

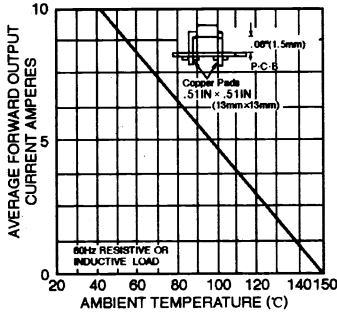


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

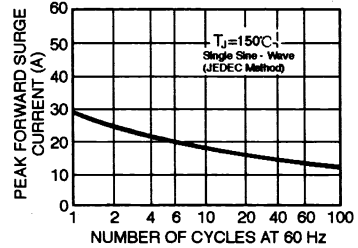


FIG. 4 - TYPICAL FORWARD CHARACTERISTICS PER BRIDGE ELEMENT

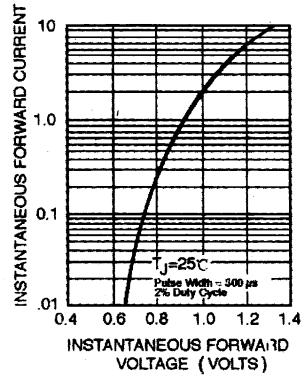


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT

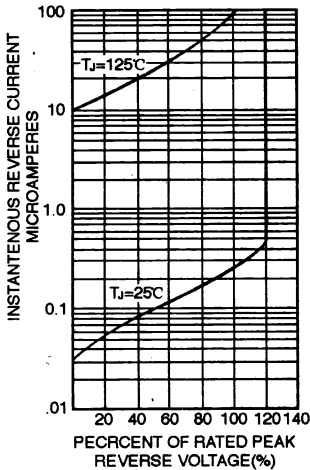


FIG. 5 - TYPICAL JUNCTION CAPACITANCE PER BRIDGE ELEMENT

