




WORLD PRODUCTS, LLC
ELECTRONIC COMPONENT SOLUTIONS



CELEBRATING 40 YEARS IN BUSINESS

TVS DIODES

Datasheet Support

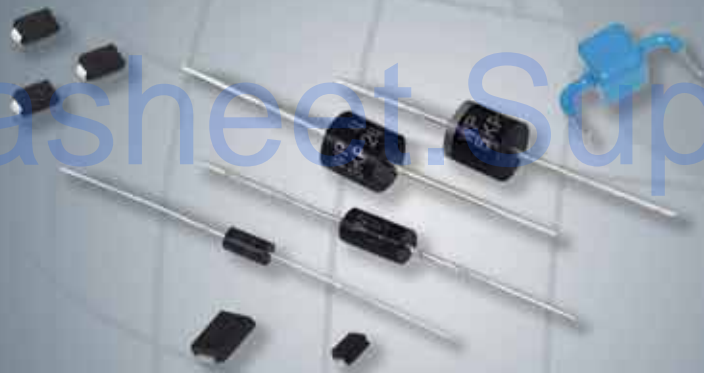

WORLD PRODUCTS, LLC || 19654 Eighth Street East || P.O. Box 517 || Sonoma, CA 95476
Phone: (707) 996.5201 || FAX: (707) 996.3380 || www.worldproducts.com || sales@worldproducts.com



THIS PAGE WAS INTENTIONALLY LEFT BLANK.

Table of Contents

| | |
|--|-----------|
| Transient Voltage Suppression Diodes | 1 |
| General Information | 2 |
| P4KE Series — 400 Watt | 8 |
| SA Series — 500 Watt | 12 |
| P6KE Series — 600 Watt | 18 |
| 1.5KE Series — 1500 Watt | 22 |
| 3KP Series — 3000 Watt | 26 |
| 5KP Series — 5000 Watt | 30 |
| 15KP Series — 15000 Watt | 34 |
| 20KP Series — 20000 Watt NEW | 38 |
| 30KP Series — 30000 Watt NEW | 40 |
| P4SMAJ Series — 400 Watt Surface Mount | 42 |
| P6SMBJ Series — 600 Watt Surface Mount | 48 |
| 1.5SMCJ Series — 1500 Watt Surface Mount | 54 |
| 3.0SMCJ Series — 3000 Watt Surface Mount | 60 |
| 5.0SMCJ Series — 5000 Watt Surface Mount | 66 |
| Circuit Examples | 68 |
| Applications | 69 |

Transient Voltage Suppression Diodes

World Products, LLC is committed to providing the optimum products for your transient/surge protection problems. Our TVS Diode satisfies the toughest requirements for a low clamping device and provides superior performance in all applications.

World Products expands your options . . . Large selection of equivalents to essentially all TVS Diodes. World Products specifications are designed to provide all of the necessary physical and electrical parameters required for proper component selection.

Discover why the first choice in TVS Diodes is WPI.



General Information

TVS Diode Technology

World Products Transient Voltage Suppression (TVS) Diodes are silicon avalanche devices designed, manufactured, specified and tested according to voltage suppression applications.

These devices, with their fast response and low clamping characteristics, protect all MOS technology based devices, hybrids, and other voltage sensitive components. The low clamping factor and pico-second response time of World Products TVS Diodes clamps transient pulses early and maintains them at an acceptable level for their entire duration. In other overvoltage protection devices, response times are delayed by 24nS to 2 μ s allowing transients to reach dangerous levels. World Products TVS Diodes are designed to meet a 1.30 maximum clamping factor at their rated peak impulse current. This can be compared to clamping factors of 2 to 5 found in other protection devices.

TVS Diode Applications

TVS Diodes are the optimum choice in protecting computer or data processor circuits and power supplies, airframe avionics and controls, numerically controlled machines, telecom circuits, and many other applications. These devices are designed to protect against transient voltages generated by lightning, electro-static discharge (ESD), and inductive switching.

TVS Diode RoHS Compliance

All axial TVS Diodes (no suffix code required) and SMD TVS Diodes (denoted by suffix "F") products purchased from World Products, LLC comply to a maximum concentration value of 0.1% by weight in homogeneous materials for lead (Pb), mercury, hexavalent chromium, polybrominated biphenyls (PBB) and polybrominated diphenyl ethers (PBDE) and of 0.01% weight in homogeneous materials for cadmium and are in compliance with Directive 2002/95/EC of the European Parliament and of the Council of 27 January 2003 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS Directive).

Note: Lead(Pb) in high-melting point solder for internal connections is not inhibited by RoHS. (i.e. tin-lead solder alloys containing more than 85%)

Selecting the Correct Part Type

The following guidelines should be observed in selecting the correct diode:

TVS Parameters Application Parameters


| | | | | |
|-----------------------|--------|----|--------------------------|-------|
| 1. Stand-off Voltage | (VWM) | >= | Operating Voltage | (VOP) |
| 2. Peak Pulse Current | (IPPM) | >= | Source Transient Current | (IS) |
| 3. Clamping Voltage | (VC) | =< | Voltage Withstand | (VWS) |

1. If the stand-off voltage is less than the operating voltage of the application, the diode will continually clamp the circuit voltage.
2. The Peak Pulse Current (IPPM) is the maximum current the TVS can handle. The source transient current is determined by dividing the peak transient voltage by the source impedance — this is often difficult to determine. In many cases, however, this may be obtained from industry standard documents, customer requirements, etc.
3. Determine the maximum voltage level that the protected device can withstand (VWS). Select a suppressor which will clamp the transient at a lower level (VC).

Consider the transient source: lightning, electro-static discharge, inductive switching or nuclear explosion (NEMP). Often, a 1500 watt peak pulse rated device will protect against transients due to secondary lightning effects or inductive switching on power, data and telephone lines. A 500 watt device is sufficient to protect sensitive components against transients generated by electro-static discharge.

General Information (continued)

Schematic Symbols

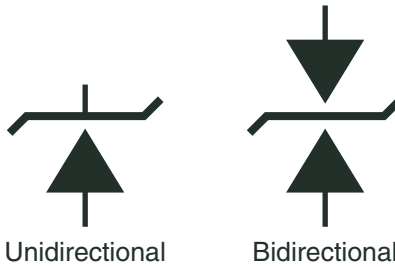

Definitions of Terms

V_c Clamping Voltage:

Peak voltage across the suppressor measured at a specific IPPM. (Note: due to thermal, reactive or other effects, peak voltage and peak current are not necessarily coincident in time.)

IPP Peak Impulse Current:

Peak current measured using a specified waveform.

IPPM Rated Peak Impulse Current:

Rated maximum value of peak impulse current (IPP) applied using a 10 x 1000μs waveform. (Minimum of 10 pulses applied.)

V_{wm} Rated Standoff Voltage:

Maximum working (continuous) DC or peak voltage which may be applied over the standard operating temperature range. (Note: V_{wm} of a selected device must be greater than or equal to the maximum operating voltage of the line to be protected.)

I_d Stand-By Current:

Maximum current that flows through the suppressor at rated standoff voltage (V_{wm}) at a specified temperature.

V_{BR} Breakdown Voltage:

The voltage measured across the suppressor at a specified DC test current (I_T).

I_T Test Current:

The specific DC current applied to the suppressor used to determine breakdown voltage (V_{BR}).

V_{BR} Temperature Coefficient:

The ratio of change in breakdown voltage (V_{BR}) to changes in temperature. Expressed either as millivolts per degree centigrade (mV/°C) or percent change in breakdown voltage per degree centigrade (%V_{BR}/°C).

CF Clamping Factor:

Ratio of the measured clamping voltage (V_c) at specified peak pulse current (IPP) to breakdown voltage (V_{BR}) on a specific device.

$$CF = \frac{V_C}{V_{BR}}$$

C Capacitance:

Capacitance between the two terminals of a suppressor measured at a specific frequency and bias voltage.

PPPM Rated Multiple Peak Pulse Power:


Derived by multiplying the maximum clamping voltage (V_c) times the Rated Peak Impulse Current (IPPM).

IFSM Rated Forward Surge Current:

Unidirectional devices only. Maximum forward current during a 8.3ms half sine wave of AC line frequency (60Hz).

General Information (continued)

Impulse Current Waveform

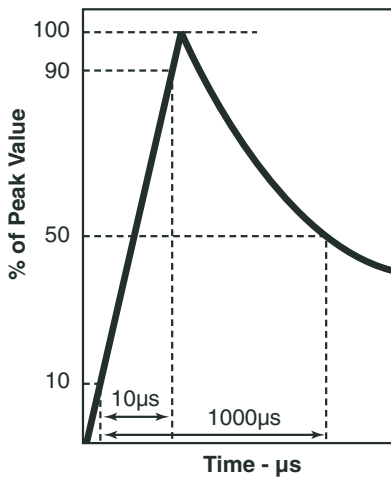

Mechanical Characteristics

Case: UL94V-0 Molded Epoxy

Leads: Tinned Copper

Bending Terminal Leads (Through-hole) Types

When bending the leads, in order to avoid stress to the area where the leads enter the resinous body, use a tool that clamps the point between the package and the bending point. Improper bending will damage the die or separate the resin from the mounting frame, resulting in a degradation in electrical characteristics or a reliability problem such as poor resistance to moisture.


The leads must be bent only once and they should not be bent at an angle of more than 90°C. Leads must be formed before fixing them to a printed circuit board. Never form the leads after soldering.

Recommended distances are:

2mm for P4KE and SA series.

3mm for 1.5KE series.

4mm for 3KP, 5KP, 15KP, 20KP and 30KP series.

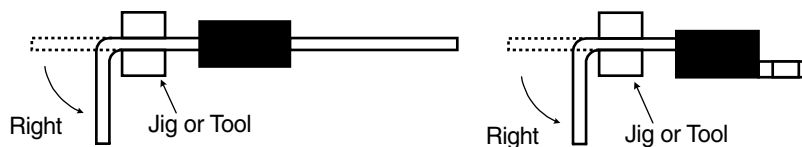


General Information (continued)

Solderability


Military Standard 202G Method 208H

Heat Resistance of Solder

Standard Temperature Profile for Lead Solder (Sn-Pb eutectic)

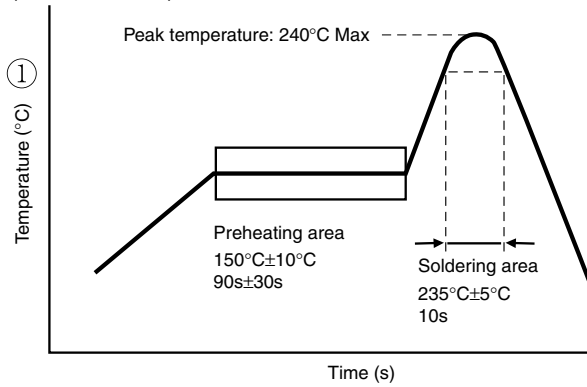

Standard Temperature Profile for Lead-free Solder

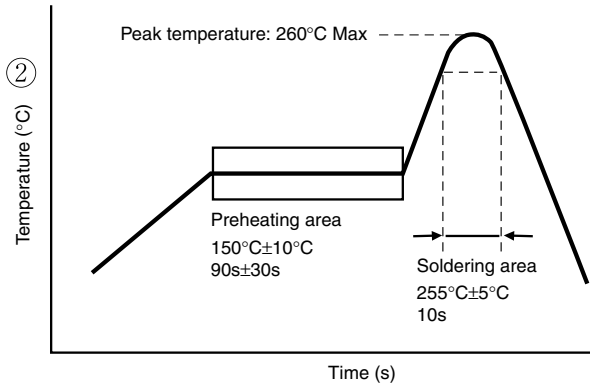

Note: For Lead-free solder, the maximum temperature during mounting processes will be 260°C for both re-flow and flow soldering processes.

Soldering of Through-hole Mounting Devices

Resistance to soldering heat test is carried out under the condition shown below. Soldering should be completed at a lowest possible temperature for a shortest period.



Temp. 260 ± 5°C
Duration 10 ± 1s

General requirements for manual soldering are as follows:

- Use a soldering iron of 30 watts maximum, that is grounded or with a high insulation resistance.
- The iron tip is kept away from any resinous body.
- Attachment should be achieved in not more than 3 seconds.


Be sure again not to put an excessive mechanical stress on devices, such as a rough insertion of device into a throughhole, or manual reforming of leads after soldering.

Axial Lead Devices

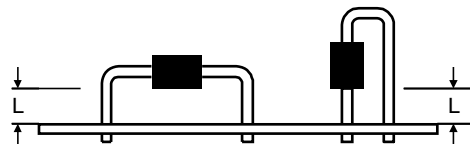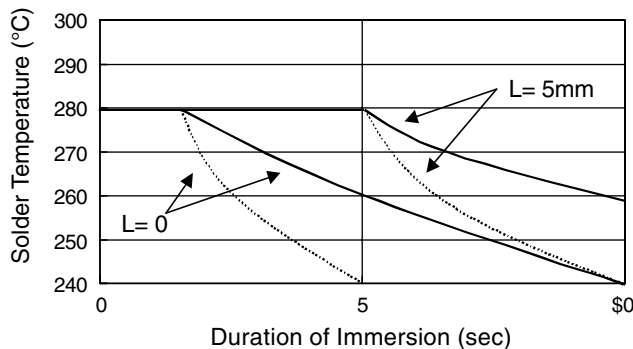

General Information (continued)


Preformed Lead Drawings

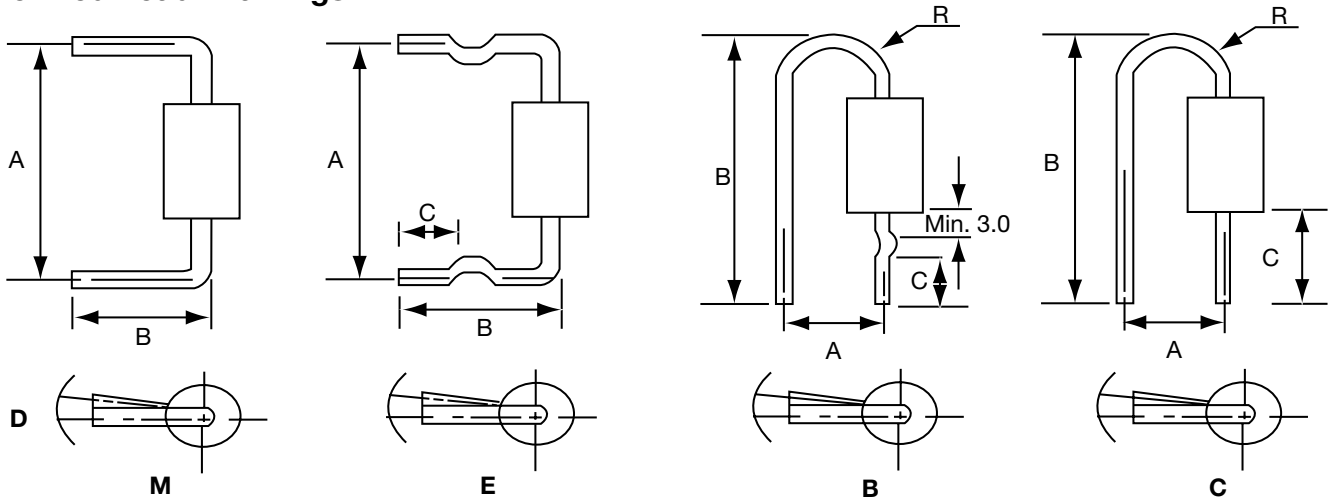


| Case type | Preformed type | A (mm) | | B (mm) | | C (mm) | | D (mm) | | R (mm) | |
|---|----------------|--------|-----------|--------|-----------|--------|-----------|--------|-----------|--------|-----------|
| | | Range | Tolerance | Range | Tolerance | Range | Tolerance | Range | Tolerance | Range | Tolerance |
| DO-41 package P4KE Series | M | 11~20 | ±0.5 | 8~20 | ±0.5 | --- | --- | 1.5 | max. | --- | --- |
| | E | 11~20 | ±0.5 | 11~16 | ±1.0 | 4~5 | ±0.5 | 1.5 | max. | --- | --- |
| | B | 7.5 | ±0.5 | 19~22 | ±0.5 | 7.5 | ±0.5 | 1.5 | max. | 2.5~4 | typ. |
| | C | 4.5 | ±0.8 | 18~19 | ±0.5 | 9.0 | ±0.5 | 1.5 | max. | 2.5~4 | typ. |
| DO-15 package SA Series P6KE Series | M | 13~20 | ±0.5 | 8~22 | ±0.5 | --- | --- | 1.5 | max. | --- | --- |
| | E | 13~20 | ±0.5 | 11~16 | ±1.0 | 4~5 | ±0.5 | 1.5 | max. | --- | --- |
| DO-201AD package 1.5KE Series | M | 15~20 | ±1.0 | 8~22 | ±1.0 | --- | --- | 2.0 | max. | --- | --- |
| | E | 15~20 | ±1.0 | 10~22 | ±1.0 | 3~5 | ±0.5 | 2.0 | max. | --- | --- |
| R-6 package 3KP Series 5KP Series 15KP Series | M | 15~20 | ±1.0 | 8~22 | ±1.0 | --- | --- | 2.0 | max. | --- | --- |
| | M | 15~20 | ±1.0 | 8~22 | ±1.0 | --- | --- | 2.0 | max. | --- | --- |
| | M | 15~20 | ±1.0 | 8~22 | ±1.0 | --- | --- | 2.0 | max. | --- | --- |

Part Marking

For Surface Mount Devices

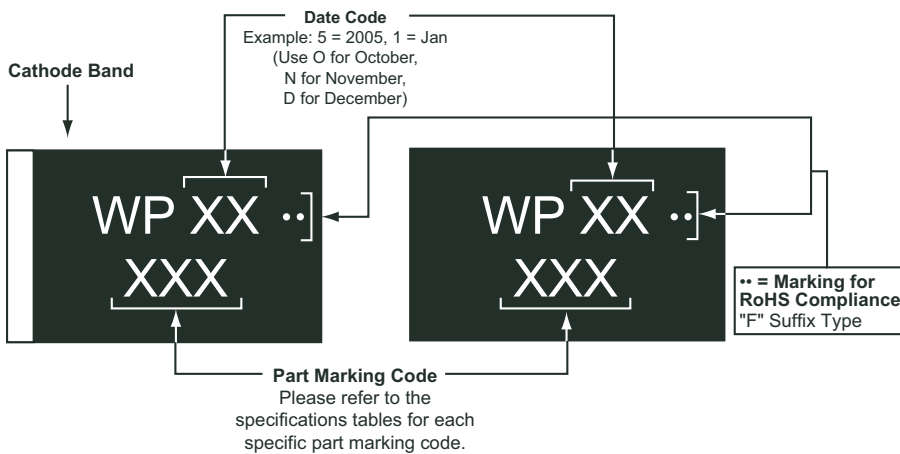

For Axial Lead

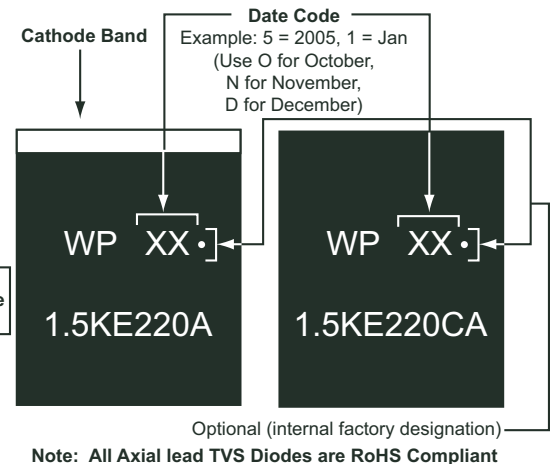

General Information (continued)

Part Numbering System

Axial Type

Example Part Number:

P4KE **20** **C** **A** **TR**
 (1) (2) (3) (4) (5)

- (1) Series:** P4KE = 400 Watt
 SA = 500 Watt
 P6KE = 600 Watt
 1.5KE = 1500 Watt
 3KP = 3000 Watt
 5KP = 5000 Watt
 15KP = 15000 Watt
 20KP = 20000 Watt
 30KP = 30000 Watt

Notes:

RoHS Compliance standard.

- (2) Voltage:** 20 = 20V
 Nominal Breakdown Voltage For P4KE, P6KE, 1.5KE
 Rated Standoff Voltage For SA, 3KP, 5KP, 15KP, 20KP, 30KP

- (3) Polarity:** Blank = Unidirectional
 C = Bidirectional

- (4) Tolerance:** Blank = 10%
 A = 5%

- (5) Packaging:** Blank = Bulk
 TR = Tape and Reel

Surface Mount

Example Part Number:

P4SMAJ **20** **C** **A** **F**
 (1) (2) (3) (4) (5)

- (1) Series:** P4SMAJ = 400 Watt Surface Mount
 P6SMBJ = 600 Watt Surface Mount
 1.5SMCJ = 1500 Watt Surface Mount
 3.0SMCJ = 3000 Watt Surface Mount
 5.0SMCJ = 5000 Watt Surface Mount

Notes:

For RoHS Compliance, add suffix "F".
 Standard packaging for Surface Mount parts is Tape and Reel.
 P4SMAJ = 5000 pieces
 P6SMBJ = 3000 pieces
 1.5SMCJ = 3000 pieces
 3.0SMCJ = 3000 pieces
 5.0SMCJ = 3000 pieces

- (2) Rated Stand-Off Voltage:** 20 = 20V

- (3) Polarity:** Blank = Unidirectional
 C = Bidirectional

- (4) Tolerance:** Blank = 10%
 A = 5%

- (5) RoHS Compliance:** Blank: No Compliance
 F: RoHS Compliance

P4KE Series – 400 Watt




P4KE Series Features

- RoHS Compliance Standard
- 400 watt peak pulse power dissipation
- Available in voltages from 6.8V to 440V
- Unidirectional and Bidirectional
- Glass passivated junction
- Low clamping factor
- Available in bulk or tape and reel (Reel quantity = 5,000 pieces)
- Each device 100% surge tested
- Tape and Reel to EIA Standard RS-296-E
- UL 497B Recognized, File #E135015


Absolute Maximum Ratings

| Parameter | Value |
|---|------------------|
| Peak pulse power dissipation (PPPM) at 25°C | 400W |
| Steady state power dissipation at lead temperature = 75°C (Lead length 3/8" min.) | 1W |
| Operating and storage temperatures | -65°C to + 175°C |

Mechanical Dimensions

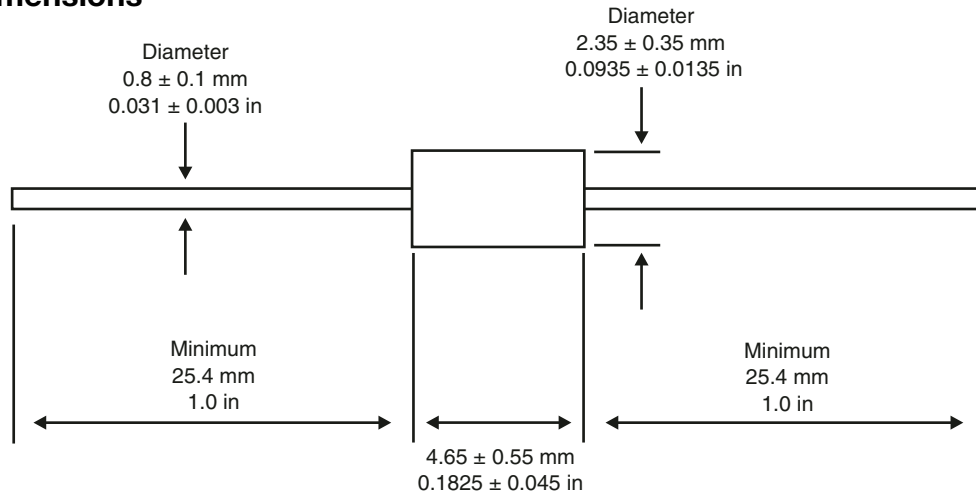

Standard Mounting Pad Layout

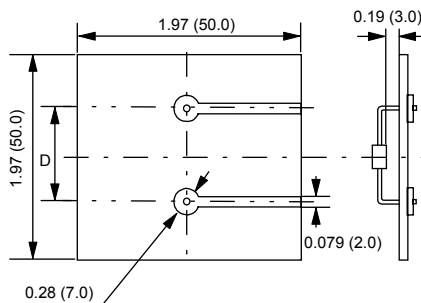

NOTE: **Dimension D**
 a.) P4KE (DO-41 Package) - 0.362 (9.2)
 b.) SA / P6KE (DO-15 Package) - 0.437 (11.6)
Hole Diameter
 a.) 0.044 (1.1)

All dimensions in inches and (millimeters)

P4KE Series – 400 Watt (continued)**Electrical Characteristics**

| Part Number* | Rated Standoff Voltage | Breakdown Voltage | | | Maximum Stand By Current @VWM+ Id | 10/1000 μ s Maximum Clamping Voltage @Ippm# Vc Max | 10/1000 μ s Rated Peak Impulse Current Ippm# |
|--------------|------------------------|-------------------|-------|------|-----------------------------------|--|--|
| | | Vbr (Volts) | | @It | | | |
| | Vwm (Volts) | Min | Max | (mA) | (μ A) | (Volts) | (Amperes) |
| P4KE6.8 | 5.50 | 6.12 | 7.48 | 10 | 1000 | 10.8 | 38.0 |
| P4KE6.8A | 5.80 | 6.45 | 7.14 | 10 | 1000 | 10.5 | 40.0 |
| P4KE7.5 | 6.05 | 6.75 | 8.25 | 10 | 500 | 11.7 | 36.0 |
| P4KE7.5A | 6.40 | 7.13 | 7.88 | 10 | 500 | 11.3 | 37.0 |
| P4KE8.2 | 6.63 | 7.38 | 9.02 | 10 | 200 | 12.5 | 33.0 |
| P4KE8.2A | 7.02 | 7.79 | 8.61 | 10 | 200 | 12.1 | 35.0 |
| P4KE9.1 | 7.37 | 8.19 | 10.00 | 1 | 50 | 13.8 | 30.0 |
| P4KE9.1A | 7.78 | 8.65 | 9.55 | 1 | 50 | 13.4 | 31.0 |
| P4KE10 | 8.10 | 9.00 | 11.00 | 1 | 10 | 15.0 | 28.0 |
| P4KE10A | 8.55 | 9.50 | 10.50 | 1 | 10 | 14.5 | 29.0 |
| P4KE11 | 8.92 | 9.90 | 12.10 | 1 | 5 | 16.2 | 26.0 |
| P4KE11A | 9.40 | 10.50 | 11.60 | 1 | 5 | 15.6 | 27.0 |
| P4KE12 | 9.72 | 10.80 | 13.20 | 1 | 5 | 17.3 | 24.0 |
| P4KE12A | 10.20 | 11.40 | 12.60 | 1 | 5 | 16.7 | 25.0 |
| P4KE13 | 10.50 | 11.70 | 14.30 | 1 | 5 | 19.0 | 22.0 |
| P4KE13A | 11.10 | 12.40 | 13.70 | 1 | 5 | 18.2 | 23.0 |
| P4KE15 | 12.10 | 13.50 | 16.50 | 1 | 5 | 22.0 | 19.0 |
| P4KE15A | 12.80 | 14.30 | 15.80 | 1 | 5 | 21.2 | 20.0 |
| P4KE16 | 12.90 | 14.40 | 17.60 | 1 | 5 | 23.5 | 18.0 |
| P4KE16A | 13.60 | 15.20 | 16.80 | 1 | 5 | 22.5 | 19.0 |
| P4KE18 | 14.50 | 16.20 | 19.80 | 1 | 5 | 26.5 | 16.0 |
| P4KE18A | 15.30 | 17.10 | 18.90 | 1 | 5 | 25.2 | 17.0 |
| P4KE20 | 16.20 | 18.00 | 22.00 | 1 | 5 | 29.1 | 14.0 |
| P4KE20A | 17.10 | 19.00 | 21.00 | 1 | 5 | 27.7 | 15.0 |
| P4KE22 | 17.80 | 19.80 | 24.20 | 1 | 5 | 31.9 | 13.0 |
| P4KE22A | 18.80 | 20.90 | 23.10 | 1 | 5 | 30.6 | 14.0 |
| P4KE24 | 19.40 | 21.60 | 26.40 | 1 | 5 | 34.7 | 12.0 |
| P4KE24A | 20.50 | 22.80 | 25.20 | 1 | 5 | 33.2 | 13.0 |
| P4KE27 | 21.80 | 24.30 | 29.70 | 1 | 5 | 39.1 | 11.0 |
| P4KE27A | 23.10 | 25.70 | 28.40 | 1 | 5 | 37.5 | 11.2 |

* = Add "C" or "CA" suffix for bidirectional device types.

+ = For Bidirectional Types Having VWM \leq 10V, their ID limit is doubled.

= See General Information for Impulse Current Waveform.

P4KE Series – 400 Watt (continued)**Electrical Characteristics (continued)**

| Part Number* | Rated Standoff Voltage | Breakdown Voltage | | | Maximum Stand By Current @VWM+ Id | 10/1000µs Maximum Clamping Voltage @Ippm# Vc Max | 10/1000µs Rated Peak Impulse Current Ippm# |
|--------------|------------------------|-------------------|--------|------|-----------------------------------|--|--|
| | | Vbr (Volts) | | @It | | | |
| | Vwm (Volts) | Min | Max | (mA) | (µA) | (Volts) | (Amperes) |
| P4KE30 | 24.30 | 27.00 | 33.00 | 1 | 5 | 43.5 | 10.0 |
| P4KE30A | 25.60 | 28.50 | 31.50 | 1 | 5 | 41.4 | 10.0 |
| P4KE33 | 26.80 | 29.70 | 36.30 | 1 | 5 | 47.7 | 9.0 |
| P4KE33A | 28.20 | 31.40 | 34.70 | 1 | 5 | 45.7 | 9.0 |
| P4KE36 | 29.10 | 32.40 | 39.60 | 1 | 5 | 52.0 | 8.0 |
| P4KE36A | 30.80 | 34.20 | 37.80 | 1 | 5 | 49.9 | 8.4 |
| P4KE39 | 31.60 | 35.10 | 42.90 | 1 | 5 | 56.4 | 7.4 |
| P4KE39A | 33.30 | 37.10 | 41.00 | 1 | 5 | 53.9 | 7.8 |
| P4KE43 | 34.80 | 38.70 | 47.30 | 1 | 5 | 61.9 | 6.8 |
| P4KE43A | 36.80 | 40.90 | 45.20 | 1 | 5 | 59.3 | 7.1 |
| P4KE47 | 38.10 | 42.30 | 51.70 | 1 | 5 | 67.8 | 6.2 |
| P4KE47A | 40.20 | 44.70 | 49.40 | 1 | 5 | 64.8 | 5.0 |
| P4KE51 | 41.30 | 45.90 | 56.10 | 1 | 5 | 73.5 | 5.7 |
| P4KE51A | 43.60 | 48.50 | 53.60 | 1 | 5 | 70.1 | 6.0 |
| P4KE56 | 45.60 | 50.40 | 61.60 | 1 | 5 | 80.5 | 5.2 |
| P4KE56A | 47.80 | 53.20 | 58.80 | 1 | 5 | 77.0 | 5.5 |
| P4KE62 | 50.20 | 55.80 | 68.20 | 1 | 5 | 89.0 | 4.7 |
| P4KE62A | 53.00 | 58.90 | 65.10 | 1 | 5 | 85.0 | 5.0 |
| P4KE68 | 55.10 | 61.20 | 74.80 | 1 | 5 | 98.0 | 4.3 |
| P4KE68A | 58.10 | 64.60 | 71.40 | 1 | 5 | 92.0 | 4.6 |
| P4KE75 | 60.70 | 67.50 | 82.50 | 1 | 5 | 108.0 | 3.9 |
| P4KE75A | 64.10 | 71.30 | 78.80 | 1 | 5 | 103.0 | 4.1 |
| P4KE82 | 66.40 | 73.80 | 90.20 | 1 | 5 | 118.0 | 3.6 |
| P4KE82A | 70.10 | 77.90 | 86.10 | 1 | 5 | 113.0 | 3.7 |
| P4KE91 | 73.70 | 81.90 | 100.00 | 1 | 5 | 131.0 | 3.2 |
| P4KE91A | 77.80 | 86.50 | 95.50 | 1 | 5 | 125.0 | 3.4 |
| P4KE100 | 81.00 | 90.00 | 110.00 | 1 | 5 | 144.0 | 2.9 |
| P4KE100A | 85.50 | 95.00 | 105.00 | 1 | 5 | 137.0 | 3.1 |
| P4KE110 | 89.20 | 99.90 | 121.00 | 1 | 5 | 158.0 | 2.7 |
| P4KE110A | 94.00 | 105.00 | 116.00 | 1 | 5 | 152.0 | 2.8 |

* = Add "C" or "CA" suffix for bidirectional device types.

+ = For Bidirectional Types Having VWM <= 10V, their ID limit is doubled.

= See General Information for Impulse Current Waveform.

P4KE Series – 400 Watt (continued)**Electrical Characteristics (continued)**

| Part Number* | Rated Standoff Voltage | Breakdown Voltage | | | Maximum Stand By Current @VWM+ Id | 10/1000µs Maximum Clamping Voltage @Ippm# Vc Max | 10/1000µs Rated Peak Impulse Current Ippm# |
|--------------|------------------------|-------------------|--------|------|-----------------------------------|--|--|
| | | Vbr (Volts) | | @It | | | |
| | Vwm (Volts) | Min | Max | (mA) | (µA) | (Volts) | (Amperes) |
| P4KE120 | 97.20 | 108.00 | 132.00 | 1 | 5 | 173.0 | 2.4 |
| P4KE120A | 102.00 | 114.00 | 126.00 | 1 | 5 | 165.0 | 2.5 |
| P4KE130 | 105.00 | 117.00 | 143.00 | 1 | 5 | 187.0 | 2.2 |
| P4KE130A | 111.00 | 124.00 | 137.00 | 1 | 5 | 179.0 | 2.3 |
| P4KE150 | 121.00 | 135.00 | 165.00 | 1 | 5 | 215.0 | 2.0 |
| P4KE150A | 128.00 | 143.00 | 158.00 | 1 | 5 | 207.0 | 2.0 |
| P4KE160 | 130.00 | 144.00 | 176.00 | 1 | 5 | 230.0 | 1.8 |
| P4KE160A | 136.00 | 152.00 | 168.00 | 1 | 5 | 219.0 | 1.9 |
| P4KE170 | 138.00 | 153.00 | 187.00 | 1 | 5 | 244.0 | 1.7 |
| P4KE170A | 145.00 | 162.00 | 179.00 | 1 | 5 | 234.0 | 1.8 |
| P4KE180 | 146.00 | 162.00 | 198.00 | 1 | 5 | 258.0 | 1.6 |
| P4KE180A | 154.00 | 171.00 | 189.00 | 1 | 5 | 246.0 | 1.7 |
| P4KE200 | 162.00 | 180.00 | 220.00 | 1 | 5 | 287.0 | 1.5 |
| P4KE200A | 171.00 | 190.00 | 210.00 | 1 | 5 | 274.0 | 1.53 |
| P4KE220 | 175.00 | 198.00 | 242.00 | 1 | 5 | 344.0 | 1.16 |
| P4KE220A | 185.00 | 209.00 | 231.00 | 1 | 5 | 328.0 | 1.22 |
| P4KE250 | 202.00 | 225.00 | 275.00 | 1 | 5 | 360.0 | 1.10 |
| P4KE250A | 214.00 | 237.00 | 263.00 | 1 | 5 | 344.0 | 1.16 |
| P4KE300 | 243.00 | 270.00 | 330.00 | 1 | 5 | 430.0 | 0.93 |
| P4KE300A | 256.00 | 285.00 | 315.00 | 1 | 5 | 414.0 | 0.97 |
| P4KE350 | 284.00 | 315.00 | 385.00 | 1 | 5 | 504.0 | 0.79 |
| P4KE350A | 300.00 | 332.00 | 368.00 | 1 | 5 | 482.0 | 0.83 |
| P4KE400 | 324.00 | 360.00 | 440.00 | 1 | 5 | 574.0 | 0.70 |
| P4KE400A | 342.00 | 380.00 | 420.00 | 1 | 5 | 548.0 | 0.73 |
| P4KE440 | 356.00 | 396.00 | 484.00 | 1 | 5 | 631.0 | 0.66 |
| P4KE440A | 376.00 | 418.00 | 462.00 | 1 | 5 | 600.0 | 0.69 |

* = Add "C" or "CA" suffix for bidirectional device types.

+ = For Bidirectional Types Having VWM <= 10V, their ID limit is doubled.

= See General Information for Impulse Current Waveform.

SA Series – 500 Watt




SA Series Features

- RoHS Compliance Standard
- 500 watt peak pulse power dissipation
- Available in voltages from 5.0V to 170V
- Unidirectional and Bidirectional
- Glass passivated junction
- Low clamping factor
- Available in bulk or tape and reel (Reel quantity = 4,000 pieces)
- Each device 100% surge tested
- Tape and Reel to EIA Standard RS-296-E
- UL 497B Recognized, File #E135015


Absolute Maximum Ratings

| Parameter | Value |
|---|------------------|
| Peak pulse power dissipation (PPPM) at 25°C | 500W |
| Steady state power dissipation at lead temperature = 75°C (Lead length 3/8" min.) | 1W |
| Operating and storage temperatures | -55°C to + 175°C |

Mechanical Dimensions

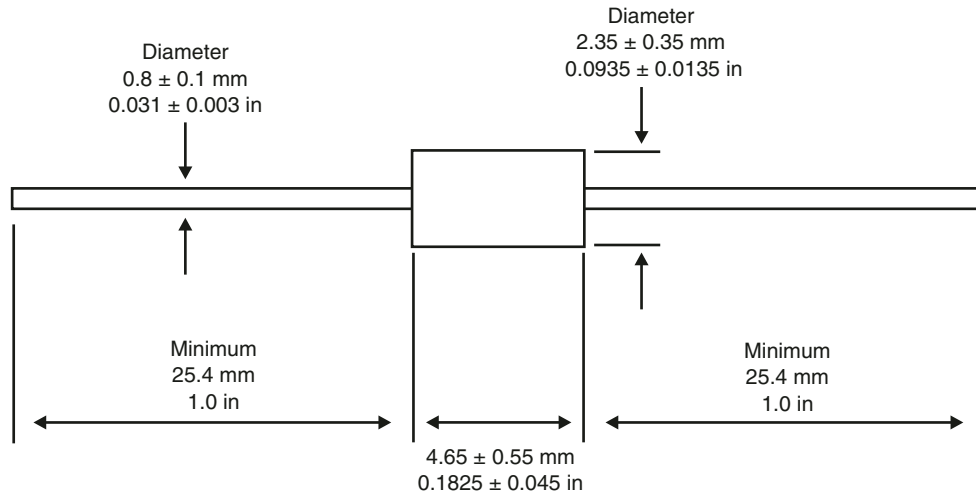

Standard Mounting Pad Layout

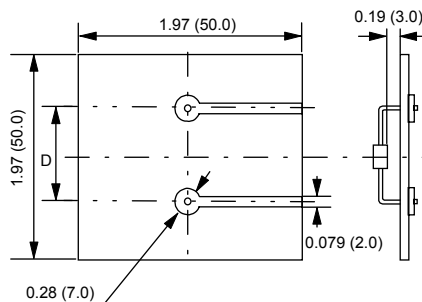

NOTE: **Dimension D**
 a.) P4KE (DO-41 Package) - 0.362 (9.2)
 b.) SA / P6KE (DO-15 Package) - 0.437 (11.6)
Hole Diameter
 a.) 0.044 (1.1)

All dimensions in inches and (millimeters)

SA Series – 500 Watt (continued)**Electrical Characteristics**

| Part Number* | Rated Standoff Voltage | Breakdown Voltage | | | Maximum Stand By Current @VWM+ Id | 10/1000µs Maximum Clamping Voltage @Ippm# Vc Max | 10/1000µs Rated Peak Impulse Current Ippm# |
|--------------|------------------------|-------------------|------|------|-----------------------------------|--|--|
| | | Vbr (Volts) | | @It | | | |
| | Vwm (Volts) | Min | Max | (mA) | (µA) | (Volts) | (Amperes) |
| SA5.0 | 5.0 | 6.40 | 7.30 | 10 | 600 | 9.6 | 52.0 |
| SA5.0A | 5.0 | 6.40 | 7.00 | 10 | 600 | 9.2 | 54.3 |
| SA6.0 | 6.0 | 6.67 | 8.15 | 10 | 600 | 11.4 | 43.9 |
| SA6.0A | 6.0 | 6.67 | 7.37 | 10 | 600 | 10.3 | 48.5 |
| SA6.5 | 6.5 | 7.22 | 8.82 | 10 | 400 | 12.3 | 40.7 |
| SA6.5A | 6.5 | 7.22 | 7.98 | 10 | 400 | 11.2 | 44.7 |
| SA7.0 | 7.0 | 7.78 | 9.51 | 10 | 150 | 13.3 | 37.8 |
| SA7.0A | 7.0 | 7.78 | 8.60 | 10 | 150 | 12.0 | 41.7 |
| SA7.5 | 7.5 | 8.33 | 10.2 | 1 | 50 | 14.3 | 35.0 |
| SA7.5A | 7.5 | 8.33 | 9.21 | 1 | 50 | 12.9 | 38.8 |
| SA8.0 | 8.0 | 8.89 | 10.9 | 1 | 25 | 15.0 | 33.3 |
| SA8.0A | 8.0 | 8.89 | 8.93 | 1 | 25 | 13.6 | 36.7 |
| SA8.5 | 8.5 | 9.44 | 11.5 | 1 | 10 | 15.9 | 31.4 |
| SA8.5A | 8.5 | 9.44 | 10.4 | 1 | 10 | 14.4 | 34.7 |
| SA9.0 | 9.0 | 10.0 | 12.2 | 1 | 5 | 16.9 | 29.5 |
| SA9.0A | 9.0 | 10.0 | 11.1 | 1 | 5 | 15.4 | 32.5 |
| SA10 | 10 | 11.1 | 13.6 | 1 | 3 | 18.8 | 26.6 |
| SA10A | 10 | 11.1 | 12.3 | 1 | 3 | 17.0 | 29.4 |
| SA11 | 11 | 12.2 | 14.9 | 1 | 3 | 20.1 | 24.9 |
| SA11A | 11 | 12.2 | 13.5 | 1 | 3 | 18.2 | 27.4 |
| SA12 | 12 | 13.3 | 16.3 | 1 | 3 | 22.0 | 22.7 |
| SA12A | 12 | 13.3 | 14.7 | 1 | 3 | 19.9 | 25.1 |
| SA13 | 13 | 14.4 | 17.6 | 1 | 3 | 23.8 | 21.0 |
| SA13A | 13 | 14.4 | 15.9 | 1 | 3 | 21.5 | 23.2 |
| SA14 | 14 | 15.6 | 19.1 | 1 | 3 | 25.8 | 19.4 |
| SA14A | 14 | 15.6 | 17.2 | 1 | 3 | 23.2 | 21.5 |

* = Add "C" or "CA" suffix for bidirectional device types.

+ = For Bidirectional Types Having VWM <= 10V, their ID limit is doubled.

= See General Information for Impulse Current Waveform.

SA Series – 500 Watt (continued)**Electrical Characteristics (continued)**

| Part Number* | Rated Standoff Voltage | Breakdown Voltage | | | Maximum Stand By Current @VWM+ Id | 10/1000 μ s Maximum Clamping Voltage @Ippm# Vc Max | 10/1000 μ s Rated Peak Impulse Current Ippm# |
|--------------|------------------------|-------------------|------|------|-----------------------------------|--|--|
| | | Vbr (Volts) | | @It | | | |
| | Vwm (Volts) | Min | Max | (mA) | (μ A) | (Volts) | (Amperes) |
| SA15 | 15 | 16.7 | 20.4 | 1 | 3 | 26.9 | 18.8 |
| SA15A | 15 | 16.7 | 18.5 | 1 | 3 | 24.4 | 20.6 |
| SA16 | 16 | 17.8 | 21.8 | 1 | 3 | 28.8 | 17.6 |
| SA16A | 16 | 17.8 | 19.7 | 1 | 3 | 26.0 | 19.2 |
| SA17 | 17 | 18.9 | 23.1 | 1 | 3 | 30.5 | 16.4 |
| SA17A | 17 | 18.9 | 20.9 | 1 | 3 | 27.6 | 18.1 |
| SA18 | 18 | 20.0 | 24.4 | 1 | 3 | 32.2 | 15.5 |
| SA18A | 18 | 20.0 | 22.1 | 1 | 3 | 29.2 | 17.2 |
| SA20 | 20 | 22.2 | 27.1 | 1 | 3 | 35.8 | 13.9 |
| SA20A | 20 | 22.2 | 24.5 | 1 | 3 | 32.4 | 15.4 |
| SA22 | 22 | 24.4 | 29.8 | 1 | 3 | 39.4 | 12.7 |
| SA22A | 22 | 24.4 | 26.9 | 1 | 3 | 35.5 | 14.1 |
| SA24 | 24 | 26.7 | 32.6 | 1 | 3 | 43.0 | 11.6 |
| SA24A | 24 | 26.7 | 29.5 | 1 | 3 | 38.9 | 12.8 |
| SA26 | 26 | 28.9 | 35.3 | 1 | 3 | 46.6 | 10.7 |
| SA26A | 26 | 28.9 | 31.9 | 1 | 3 | 42.1 | 11.9 |
| SA28 | 28 | 31.1 | 38.0 | 1 | 3 | 50.0 | 9.9 |
| SA28A | 28 | 31.1 | 34.4 | 1 | 3 | 45.4 | 11.0 |
| SA30 | 30 | 33.3 | 40.7 | 1 | 3 | 53.5 | 9.3 |
| SA30A | 30 | 33.3 | 36.8 | 1 | 3 | 48.4 | 10.3 |
| SA33 | 33 | 36.7 | 44.9 | 1 | 3 | 59.0 | 8.5 |
| SA33A | 33 | 36.7 | 40.6 | 1 | 3 | 53.3 | 9.4 |
| SA36 | 36 | 40.0 | 48.9 | 1 | 3 | 64.3 | 7.8 |
| SA36A | 36 | 40.0 | 44.2 | 1 | 3 | 58.1 | 8.6 |
| SA40 | 40 | 44.4 | 54.3 | 1 | 3 | 71.4 | 7.0 |
| SA40A | 40 | 44.4 | 49.1 | 1 | 3 | 64.5 | 7.8 |

* = Add "C" or "CA" suffix for bidirectional device types.

+ = For Bidirectional Types Having VWM \leq 10V, their ID limit is doubled.

= See General Information for Impulse Current Waveform.

SA Series – 500 Watt (continued)**Electrical Characteristics (continued)**

| Part Number* | Rated Standoff Voltage | Breakdown Voltage | | | Maximum Stand By Current @VWM+ Id | 10/1000µs Maximum Clamping Voltage @Ippm# Vc Max | 10/1000µs Rated Peak Impulse Current Ippm# |
|--------------|------------------------|-------------------|-------|------|-----------------------------------|--|--|
| | | Vbr (Volts) | | @It | | | |
| | Vwm (Volts) | Min | Max | (mA) | (µA) | (Volts) | (Amperes) |
| SA43 | 43 | 47.8 | 58.4 | 1 | 3 | 76.7 | 6.5 |
| SA43A | 43 | 47.8 | 52.8 | 1 | 3 | 69.4 | 7.2 |
| SA45 | 45 | 50.0 | 61.1 | 1 | 3 | 80.3 | 6.2 |
| SA45A | 45 | 50.0 | 55.3 | 1 | 3 | 72.7 | 6.9 |
| SA48 | 48 | 53.3 | 65.1 | 1 | 3 | 85.5 | 5.8 |
| SA48A | 48 | 53.3 | 58.9 | 1 | 3 | 77.4 | 6.5 |
| SA51 | 51 | 56.7 | 69.3 | 1 | 3 | 91.1 | 5.5 |
| SA51A | 51 | 56.7 | 62.7 | 1 | 3 | 82.4 | 6.1 |
| SA54 | 54 | 60.0 | 73.3 | 1 | 3 | 96.3 | 5.2 |
| SA54A | 54 | 60.0 | 66.3 | 1 | 3 | 87.1 | 5.7 |
| SA58 | 58 | 64.4 | 78.7 | 1 | 3 | 103.0 | 4.9 |
| SA58A | 58 | 64.4 | 71.2 | 1 | 3 | 93.6 | 5.3 |
| SA60 | 60 | 66.7 | 81.5 | 1 | 3 | 107.0 | 4.7 |
| SA60A | 60 | 66.7 | 73.7 | 1 | 3 | 96.8 | 5.2 |
| SA64 | 64 | 71.1 | 86.9 | 1 | 3 | 114.0 | 4.4 |
| SA64A | 64 | 71.1 | 78.6 | 1 | 3 | 103.0 | 4.9 |
| SA70 | 70 | 77.8 | 95.1 | 1 | 3 | 125.0 | 4.0 |
| SA70A | 70 | 77.8 | 86.0 | 1 | 3 | 113.0 | 4.4 |
| SA75 | 75 | 83.3 | 102.0 | 1 | 3 | 134.0 | 3.7 |
| SA75A | 75 | 83.3 | 92.1 | 1 | 3 | 121.0 | 4.1 |
| SA78 | 78 | 86.7 | 106.0 | 1 | 3 | 139.0 | 3.6 |
| SA78A | 78 | 86.7 | 95.8 | 1 | 3 | 126.0 | 4.0 |
| SA85 | 85 | 94.4 | 115.0 | 1 | 3 | 151.0 | 3.3 |
| SA85A | 85 | 94.4 | 104.0 | 1 | 3 | 137.0 | 3.6 |
| SA90 | 90 | 100 | 122.0 | 1 | 3 | 160.0 | 3.1 |
| SA90A | 90 | 100 | 111.0 | 1 | 3 | 146.0 | 3.4 |

* = Add "C" or "CA" suffix for bidirectional device types.

+ = For Bidirectional Types Having VWM <= 10V, their ID limit is doubled.

= See General Information for Impulse Current Waveform.

SA Series – 500 Watt (continued)**Electrical Characteristics (continued)**

| Part Number* | Rated Standoff Voltage | Breakdown Voltage | | | Maximum Stand By Current @VWM+ Id | 10/1000 μ s Maximum Clamping Voltage @Ippm# Vc Max | 10/1000 μ s Rated Peak Impulse Current Ippm# |
|--------------|------------------------|-------------------|-------|------|-----------------------------------|--|--|
| | | Vbr (Volts) | | @It | | | |
| | Vwm (Volts) | Min | Max | (mA) | (μ A) | (Volts) | (Amperes) |
| SA100 | 100 | 111 | 136.0 | 1 | 3 | 179.9 | 2.8 |
| SA100A | 100 | 111 | 123.0 | 1 | 3 | 162.0 | 3.1 |
| SA110 | 110 | 122 | 149.0 | 1 | 3 | 196.0 | 2.6 |
| SA110A | 110 | 122 | 135.0 | 1 | 3 | 177.0 | 2.8 |
| SA120 | 120 | 133 | 163.0 | 1 | 3 | 214.0 | 2.3 |
| SA120A | 120 | 133 | 147.0 | 1 | 3 | 193.0 | 2.0 |
| SA130 | 130 | 144 | 176.0 | 1 | 3 | 231.0 | 2.2 |
| SA130A | 130 | 144 | 159.0 | 1 | 3 | 209.0 | 2.4 |
| SA150 | 150 | 167 | 204.0 | 1 | 3 | 268.0 | 1.9 |
| SA150A | 150 | 167 | 185.0 | 1 | 3 | 243.0 | 2.1 |
| SA160 | 160 | 178 | 218.0 | 1 | 3 | 287.0 | 1.7 |
| SA160A | 160 | 178 | 197.0 | 1 | 3 | 259.0 | 1.9 |
| SA170 | 170 | 189 | 231.0 | 1 | 3 | 304.0 | 1.6 |
| SA170A | 170 | 189 | 209.0 | 1 | 3 | 275.0 | 1.8 |

* = Add "C" or "CA" suffix for bidirectional device types.

+ = For Bidirectional Types Having VWM \leq 10V, their ID limit is doubled.

= See General Information for Impulse Current Waveform.



P6KE Series – 600 Watt




P6KE Series Features

- RoHS Compliance Standard
- 600 watt peak pulse power dissipation
- Available in voltages from 6.8V to 400V
- Unidirectional and Bidirectional
- Glass passivated junction
- Low clamping factor
- Available in bulk or tape and reel (Reel quantity = 4,000 pieces)
- Each device 100% surge tested
- Tape and Reel to EIA Standard RS-296-E
- UL 497B Recognized, File # E135015 (6.8V - 82V)


Absolute Maximum Ratings

| Parameter | Value |
|---|------------------|
| Peak pulse power dissipation (PPPM) at 25°C | 600W |
| Steady state power dissipation at lead temperature = 75°C (Lead length 3/8" min.) | 5W |
| Operating and storage temperatures | -55°C to + 175°C |

Mechanical Dimensions

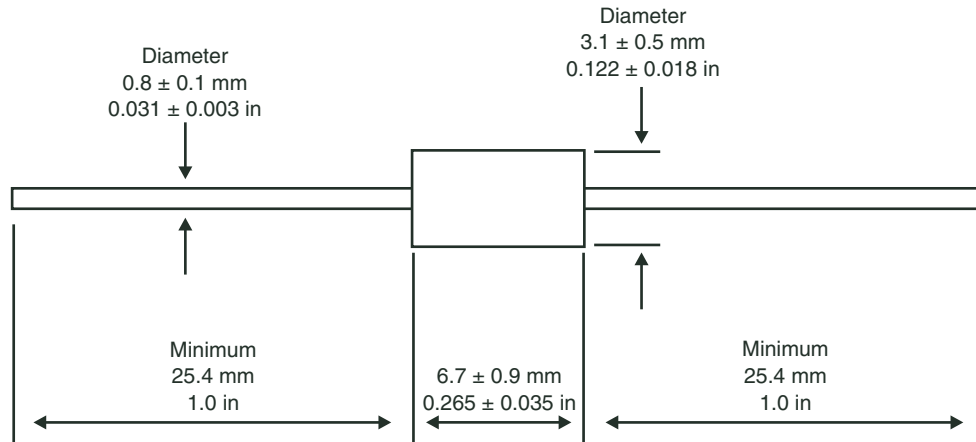

Standard Mounting Pad Layout

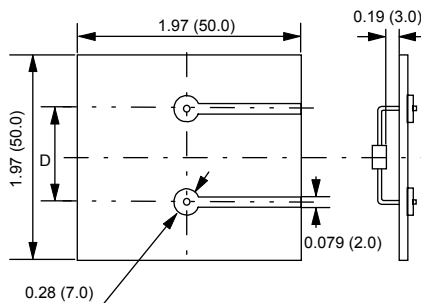

NOTE: **Dimension D**
 a.) P4KE (DO-41 Package) - 0.362 (9.2)
 b.) SA / P6KE (DO-15 Package) - 0.437 (11.6)
Hole Diameter
 a.) 0.044 (1.1)

All dimensions in inches and (millimeters)

P6KE Series – 600 Watt (continued)**Electrical Characteristics**

| Part Number* | Rated Standoff Voltage | Breakdown Voltage | | | Maximum Stand By Current @VWM+ Id | 10/1000 μ s Maximum Clamping Voltage @Ippm# Vc Max | 10/1000 μ s Rated Peak Impulse Current Ippm# |
|--------------|------------------------|-------------------|------|-----|-----------------------------------|--|--|
| | | Vbr (Volts) | | @It | | | |
| | | Vwm (Volts) | Min | Max | | | |
| P6KE6.8 | 5.50 | 6.12 | 7.48 | 10 | 1000 | 10.8 | 56 |
| P6KE6.8A | 5.80 | 6.45 | 7.14 | 10 | 1000 | 10.5 | 57 |
| P6KE7.5 | 6.05 | 6.75 | 8.25 | 10 | 500 | 11.7 | 51 |
| P6KE7.5A | 6.40 | 7.13 | 7.88 | 10 | 500 | 11.3 | 53 |
| P6KE8.2 | 6.63 | 7.38 | 9.02 | 10 | 200 | 12.5 | 48 |
| P6KE8.2A | 7.02 | 7.79 | 8.61 | 10 | 200 | 12.1 | 50 |
| P6KE9.1 | 7.37 | 8.19 | 10.0 | 1 | 50 | 13.8 | 44 |
| P6KE9.1A | 7.78 | 8.65 | 9.55 | 1 | 50 | 13.4 | 45 |
| P6KE10 | 8.10 | 9.00 | 11.0 | 1 | 10 | 15.0 | 40 |
| P6KE10A | 8.55 | 9.5 | 10.5 | 1 | 10 | 14.5 | 41 |
| P6KE11 | 8.92 | 9.9 | 12.1 | 1 | 5 | 16.2 | 37 |
| P6KE11A | 9.40 | 10.5 | 11.6 | 1 | 5 | 15.6 | 38 |
| P6KE12 | 9.72 | 10.8 | 13.2 | 1 | 5 | 17.3 | 35 |
| P6KE12A | 10.2 | 11.4 | 12.6 | 1 | 5 | 16.7 | 36 |
| P6KE13 | 10.5 | 11.7 | 14.3 | 1 | 5 | 19.0 | 32 |
| P6KE13A | 11.1 | 12.4 | 13.7 | 1 | 5 | 18.2 | 33 |
| P6KE15 | 12.1 | 13.5 | 16.5 | 1 | 5 | 22.0 | 27 |
| P6KE15A | 12.8 | 14.3 | 15.8 | 1 | 5 | 21.2 | 28 |
| P6KE16 | 12.9 | 14.4 | 17.6 | 1 | 5 | 23.5 | 26 |
| P6KE16A | 13.6 | 15.2 | 16.8 | 1 | 5 | 22.5 | 27 |
| P6KE18 | 14.5 | 16.2 | 19.8 | 1 | 5 | 26.5 | 23 |
| P6KE18A | 15.3 | 17.1 | 18.9 | 1 | 5 | 25.2 | 24 |
| P6KE20 | 16.2 | 18.0 | 22.0 | 1 | 5 | 29.1 | 21 |
| P6KE20A | 17.1 | 19.0 | 21.0 | 1 | 5 | 27.7 | 22 |
| P6KE22 | 17.8 | 19.8 | 24.2 | 1 | 5 | 31.9 | 19 |
| P6KE22A | 18.8 | 20.9 | 23.1 | 1 | 5 | 30.6 | 20 |
| P6KE24 | 19.4 | 21.6 | 26.4 | 1 | 5 | 34.7 | 17 |
| P6KE24A | 20.5 | 22.8 | 25.2 | 1 | 5 | 33.2 | 18 |
| P6KE27 | 21.8 | 24.3 | 29.7 | 1 | 5 | 39.1 | 15 |
| P6KE27A | 23.1 | 25.7 | 28.4 | 1 | 5 | 37.5 | 16 |

* = Add "C" or "CA" suffix for bidirectional device types.

+ = For Bidirectional Types Having VWM \leq 10V, their ID limit is doubled.

= See General Information for Impulse Current Waveform.

P6KE Series – 600 Watt (continued)**Electrical Characteristics (continued)**

| Part Number* | Rated Standoff Voltage | Breakdown Voltage | | | Maximum Stand By Current @VWM+ Id | 10/1000 μ s Maximum Clamping Voltage @Ippm# Vc Max | 10/1000 μ s Rated Peak Impulse Current Ippm# |
|--------------|------------------------|-------------------|-------|------|-----------------------------------|--|--|
| | | Vbr (Volts) | | @It | | | |
| | Vwm (Volts) | Min | Max | (mA) | (μ A) | (Volts) | (Amperes) |
| P6KE30 | 24.3 | 27.0 | 33.0 | 1 | 5 | 43.5 | 14 |
| P6KE30A | 25.6 | 28.5 | 31.5 | 1 | 5 | 41.4 | 14.4 |
| P6KE33 | 26.8 | 29.7 | 36.3 | 1 | 5 | 47.7 | 12.6 |
| P6KE33A | 28.2 | 31.4 | 34.7 | 1 | 5 | 45.7 | 13.2 |
| P6KE36 | 29.1 | 32.4 | 39.6 | 1 | 5 | 52.0 | 11.6 |
| P6KE36A | 30.8 | 34.2 | 37.8 | 1 | 5 | 49.9 | 12.0 |
| P6KE39 | 31.6 | 35.1 | 42.9 | 1 | 5 | 56.4 | 10.5 |
| P6KE39A | 33.3 | 37.1 | 41.0 | 1 | 5 | 53.9 | 11.2 |
| P6KE43 | 34.8 | 38.7 | 47.3 | 1 | 5 | 61.9 | 9.6 |
| P6KE43A | 36.8 | 40.9 | 45.2 | 1 | 5 | 59.3 | 10.1 |
| P6KE47 | 38.1 | 42.3 | 51.7 | 1 | 5 | 67.8 | 8.9 |
| P6KE47A | 40.2 | 44.7 | 49.4 | 1 | 5 | 64.8 | 9.3 |
| P6KE51 | 41.3 | 45.9 | 56.1 | 1 | 5 | 73.5 | 8.2 |
| P6KE51A | 43.6 | 48.5 | 53.6 | 1 | 5 | 70.1 | 8.6 |
| P6KE56 | 45.4 | 50.4 | 61.6 | 1 | 5 | 80.5 | 7.4 |
| P6KE56A | 47.8 | 53.2 | 58.8 | 1 | 5 | 77.0 | 7.8 |
| P6KE62 | 50.2 | 55.8 | 68.2 | 1 | 5 | 89.0 | 6.8 |
| P6KE62A | 53.0 | 58.9 | 65.1 | 1 | 5 | 85.0 | 7.1 |
| P6KE68 | 55.1 | 61.2 | 74.8 | 1 | 5 | 98.0 | 6.1 |
| P6KE68A | 58.1 | 64.6 | 71.4 | 1 | 5 | 92.0 | 6.5 |
| P6KE75 | 60.7 | 67.5 | 82.5 | 1 | 5 | 108.0 | 5.5 |
| P6KE75A | 64.1 | 71.3 | 78.8 | 1 | 5 | 103.0 | 5.8 |
| P6KE82 | 66.4 | 73.8 | 90.2 | 1 | 5 | 118.0 | 5.1 |
| P6KE82A | 70.1 | 77.9 | 86.1 | 1 | 5 | 113.0 | 5.3 |
| P6KE91 | 73.7 | 81.9 | 100.0 | 1 | 5 | 131.0 | 4.5 |
| P6KE91A | 77.8 | 86.5 | 95.5 | 1 | 5 | 125.0 | 4.8 |
| P6KE100 | 81.0 | 90.0 | 110.0 | 1 | 5 | 144.0 | 4.2 |
| P6KE100A | 85.5 | 95.0 | 105.0 | 1 | 5 | 137.0 | 4.4 |
| P6KE110 | 89.2 | 99.0 | 121.0 | 1 | 5 | 158.0 | 3.8 |
| P6KE110A | 94.0 | 105.0 | 116.0 | 1 | 5 | 152.0 | 4.0 |

* = Add "C" or "CA" suffix for bidirectional device types.

+ = For Bidirectional Types Having VWM \leq 10V, their ID limit is doubled.

= See General Information for Impulse Current Waveform.

P6KE Series – 600 Watt (continued)**Electrical Characteristics (continued)**

| Part Number* | Rated Standoff Voltage | Breakdown Voltage | | | Maximum Stand By Current @VWM+ Id | 10/1000µs Maximum Clamping Voltage @Ippm# Vc Max | 10/1000µs Rated Peak Impulse Current Ippm# |
|--------------|------------------------|-------------------|-------|------|-----------------------------------|--|--|
| | | Vbr (Volts) | | @It | | | |
| | Vwm (Volts) | Min | Max | (mA) | (µA) | (Volts) | (Amperes) |
| P6KE120 | 97.2 | 108.0 | 132.0 | 1 | 5 | 173.0 | 3.5 |
| P6KE120A | 102.0 | 114.0 | 126.0 | 1 | 5 | 165.0 | 3.6 |
| P6KE130 | 105.0 | 117.0 | 143.0 | 1 | 5 | 187.0 | 3.2 |
| P6KE130A | 111.0 | 124.0 | 137.0 | 1 | 5 | 179.0 | 3.3 |
| P6KE150 | 121.0 | 135.0 | 165.0 | 1 | 5 | 215.0 | 2.8 |
| P6KE150A | 128.0 | 143.0 | 158.0 | 1 | 5 | 207.0 | 2.9 |
| P6KE160 | 130.0 | 144.0 | 176.0 | 1 | 5 | 230.0 | 2.6 |
| P6KE160A | 136.0 | 152.0 | 168.0 | 1 | 5 | 219.0 | 2.7 |
| P6KE170 | 138.0 | 153.0 | 187.0 | 1 | 5 | 244.0 | 2.5 |
| P6KE170A | 145.0 | 162.0 | 179.0 | 1 | 5 | 234.0 | 2.6 |
| P6KE180 | 146.0 | 162.0 | 198.0 | 1 | 5 | 258.0 | 2.3 |
| P6KE180A | 154.0 | 171.0 | 189.0 | 1 | 5 | 246.0 | 2.4 |
| P6KE200 | 162.0 | 180.0 | 220.0 | 1 | 5 | 287.0 | 2.1 |
| P6KE200A | 171.0 | 190.0 | 210.0 | 1 | 5 | 274.0 | 2.2 |
| P6KE220 | 175.0 | 198.0 | 242.0 | 1 | 5 | 344.0 | 1.75 |
| P6KE220A | 185.0 | 209.0 | 231.0 | 1 | 5 | 328.0 | 1.83 |
| P6KE250 | 202.0 | 225.0 | 275.0 | 1 | 5 | 360.0 | 1.67 |
| P6KE250A | 214.0 | 237.0 | 263.0 | 1 | 5 | 344.0 | 1.75 |
| P6KE300 | 243.0 | 270.0 | 330.0 | 1 | 5 | 430.0 | 1.40 |
| P6KE300A | 256.0 | 285.0 | 315.0 | 1 | 5 | 414.0 | 1.45 |
| P6KE350 | 284.0 | 315.0 | 385.0 | 1 | 5 | 504.0 | 1.20 |
| P6KE350A | 300.0 | 332.0 | 368.0 | 1 | 5 | 482.0 | 1.25 |
| P6KE400 | 324.0 | 360.0 | 440.0 | 1 | 5 | 574.0 | 1.05 |
| P6KE400A | 342.0 | 380.0 | 420.0 | 1 | 5 | 548.0 | 1.10 |
| P6KE440 | 356.0 | 396.0 | 484.0 | 1 | 5 | 631.0 | 0.99 |
| P6KE440A | 376.0 | 418.0 | 462.0 | 1 | 5 | 600.0 | 1.04 |
| P6KE550 | 445.5 | 495.0 | 605.0 | 1 | 5 | 792.0 | 0.76 |
| P6KE550A | 467.5 | 522.5 | 577.5 | 1 | 5 | 753.5 | 0.80 |

* = Add "C" or "CA" suffix for bidirectional device types.

+ = For Bidirectional Types Having VWM <= 10V, their ID limit is doubled.

= See General Information for Impulse Current Waveform.

1.5KE Series – 1500 Watt




1.5KE Series Features

- RoHS Compliance Standard
- 1500 watt peak pulse power dissipation
- Available in voltages from 6.8V to 400V
- Unidirectional and Bidirectional
- Glass passivated junction
- Low clamping factor
- Available in bulk or tape and reel (Reel quantity = 1,200 pieces)
- Each device 100% surge tested
- Metal hermetically sealed (DO13) version of this diode is available upon request
- UL 497B Recognized, File # E135015 (6.8V - 300V)
- Tape and Reel to EIA Standard RS-296-E


Absolute Maximum Ratings

| Parameter | Value |
|---|------------------|
| Peak pulse power dissipation (PPPM) at 25°C | 1500W |
| Steady state power dissipation at lead temperature = 75°C (Lead length 3/8" min.) | 5W |
| Operating and storage temperatures | -55°C to + 175°C |

Mechanical Dimensions

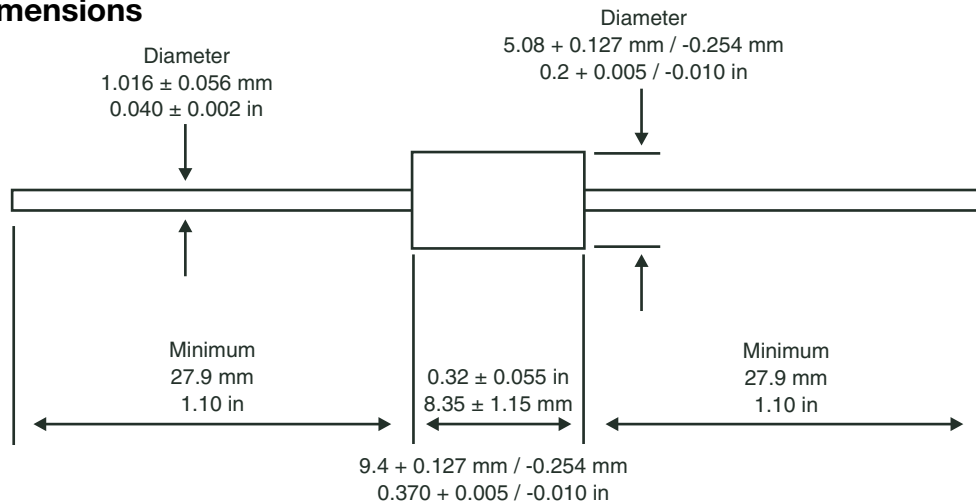

Standard Mounting Pad Layout

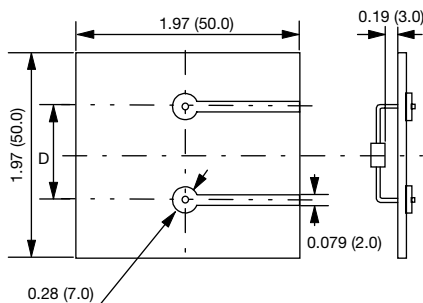

NOTE: Dimension D
 a.) 1.5KE (DO-201 Package) - 0.611 (15.5)
 b.) 3KP / 5KP / 15KP (R-6 Package) - 0.673 (17.1)
Hole Diameter
 a.) 0.059 (1.5)

All dimensions in inches and (millimeters)

1.5KE Series – 1500 Watt (continued)**Electrical Characteristics**

| Part Number* | Rated Standoff Voltage | Breakdown Voltage | | | Maximum Stand By Current @VWM+ Id | 10/1000 μ s Maximum Clamping Voltage @Ippm# Vc Max | 10/1000 μ s Rated Peak Impulse Current Ippm# |
|--------------|------------------------|-------------------|------|------|-----------------------------------|--|--|
| | | Vbr (Volts) | | @It | | | |
| | Vwm (Volts) | Min | Max | (mA) | (μ A) | (Volts) | (Amperes) |
| 1.5KE6.8 | 5.50 | 6.12 | 7.48 | 10 | 1000 | 10.8 | 139.0 |
| 1.5KE6.8A | 5.80 | 6.45 | 7.14 | 10 | 1000 | 10.5 | 143.0 |
| 1.5KE7.5 | 6.05 | 6.75 | 8.25 | 10 | 500 | 11.7 | 128.0 |
| 1.5KE7.5A | 6.40 | 7.13 | 7.88 | 10 | 500 | 11.3 | 132.0 |
| 1.5KE8.2 | 6.63 | 7.38 | 9.02 | 10 | 200 | 12.5 | 120.0 |
| 1.5KE8.2A | 7.02 | 7.79 | 8.61 | 10 | 200 | 12.1 | 124.0 |
| 1.5KE9.1 | 7.37 | 8.19 | 10.0 | 1 | 50 | 13.8 | 109.0 |
| 1.5KE9.1A | 7.78 | 8.65 | 9.55 | 1 | 50 | 13.4 | 112.0 |
| 1.5KE10 | 8.10 | 9.00 | 11.0 | 1 | 10 | 15.0 | 100.0 |
| 1.5KE10A | 8.55 | 9.5 | 10.5 | 1 | 10 | 14.5 | 103.0 |
| 1.5KE11 | 8.92 | 9.9 | 12.1 | 1 | 5 | 16.2 | 93.0 |
| 1.5KE11A | 9.40 | 10.5 | 11.6 | 1 | 5 | 15.6 | 96.0 |
| 1.5KE12 | 9.72 | 10.8 | 13.2 | 1 | 5 | 17.3 | 87.0 |
| 1.5KE12A | 10.2 | 11.4 | 12.6 | 1 | 5 | 16.7 | 90.0 |
| 1.5KE13 | 10.5 | 11.7 | 14.3 | 1 | 5 | 19.0 | 79.0 |
| 1.5KE13A | 11.1 | 12.4 | 13.7 | 1 | 5 | 18.2 | 82.0 |
| 1.5KE15 | 12.1 | 13.5 | 16.5 | 1 | 5 | 22.0 | 68.0 |
| 1.5KE15A | 12.8 | 14.3 | 15.8 | 1 | 5 | 21.2 | 71.0 |
| 1.5KE16 | 12.9 | 14.4 | 17.6 | 1 | 5 | 23.5 | 64.0 |
| 1.5KE16A | 13.6 | 15.2 | 16.8 | 1 | 5 | 22.5 | 67.0 |
| 1.5KE18 | 14.5 | 16.2 | 19.8 | 1 | 5 | 26.5 | 56.5 |
| 1.5KE18A | 15.3 | 17.1 | 18.9 | 1 | 5 | 25.2 | 59.5 |
| 1.5KE20 | 16.2 | 18.0 | 22.0 | 1 | 5 | 29.1 | 51.5 |
| 1.5KE20A | 17.1 | 19.0 | 21.0 | 1 | 5 | 27.7 | 54.0 |
| 1.5KE22 | 17.8 | 19.8 | 24.2 | 1 | 5 | 31.9 | 47.0 |
| 1.5KE22A | 18.8 | 20.9 | 23.1 | 1 | 5 | 30.6 | 49.0 |
| 1.5KE24 | 19.4 | 21.6 | 26.4 | 1 | 5 | 34.7 | 43.0 |
| 1.5KE24A | 20.5 | 22.8 | 25.2 | 1 | 5 | 33.2 | 45.0 |
| 1.5KE27 | 21.8 | 24.3 | 29.7 | 1 | 5 | 39.1 | 38.5 |

Metal hermetically sealed (DO13) version of this diode is available upon request.

* = Add "C" or "CA" suffix for bidirectional device types.

+ = For Bidirectional Types Having VWM \leq 10V, their ID limit is doubled.

= See General Information for Impulse Current Waveform.

1.5KE Series – 1500 Watt (continued)**Electrical Characteristics (continued)**

| Part Number* | Rated Standoff Voltage | Breakdown Voltage | | | Maximum Stand By Current @VWM+ Id | 10/1000 μ s Maximum Clamping Voltage @Ippm# Vc Max | 10/1000 μ s Rated Peak Impulse Current Ippm# |
|--------------|------------------------|-------------------|-------|------|-----------------------------------|--|--|
| | | Vbr (Volts) | | @It | | | |
| | Vwm (Volts) | Min | Max | (mA) | (μ A) | (Volts) | (Amperes) |
| 1.5KE27A | 23.1 | 25.7 | 28.4 | 1 | 5 | 37.5 | 40.0 |
| 1.5KE30 | 24.3 | 27.0 | 33.0 | 1 | 5 | 43.5 | 34.5 |
| 1.5KE30A | 25.6 | 28.5 | 31.5 | 1 | 5 | 41.4 | 36.0 |
| 1.5KE33 | 26.8 | 29.7 | 36.3 | 1 | 5 | 47.7 | 31.5 |
| 1.5KE33A | 28.2 | 31.4 | 34.7 | 1 | 5 | 45.7 | 33.0 |
| 1.5KE36 | 29.1 | 32.4 | 39.6 | 1 | 5 | 52.0 | 29.0 |
| 1.5KE36A | 30.8 | 34.2 | 37.8 | 1 | 5 | 49.9 | 30.0 |
| 1.5KE39 | 31.6 | 35.1 | 42.9 | 1 | 5 | 56.4 | 26.5 |
| 1.5KE39A | 33.3 | 37.1 | 41.0 | 1 | 5 | 53.9 | 28.0 |
| 1.5KE43 | 34.8 | 38.7 | 47.3 | 1 | 5 | 61.9 | 24.0 |
| 1.5KE43A | 36.8 | 40.9 | 45.2 | 1 | 5 | 59.3 | 25.3 |
| 1.5KE47 | 38.1 | 42.3 | 51.7 | 1 | 5 | 67.8 | 22.2 |
| 1.5KE47A | 40.2 | 44.7 | 49.4 | 1 | 5 | 64.8 | 23.2 |
| 1.5KE51 | 41.3 | 45.9 | 56.1 | 1 | 5 | 73.5 | 20.4 |
| 1.5KE51A | 43.6 | 48.5 | 53.6 | 1 | 5 | 70.1 | 21.4 |
| 1.5KE56 | 45.4 | 50.4 | 61.6 | 1 | 5 | 80.5 | 18.6 |
| 1.5KE56A | 47.8 | 53.2 | 58.8 | 1 | 5 | 77.0 | 19.5 |
| 1.5KE62 | 50.2 | 55.8 | 68.2 | 1 | 5 | 89.0 | 16.9 |
| 1.5KE62A | 53.0 | 58.9 | 65.1 | 1 | 5 | 85.0 | 17.7 |
| 1.5KE68 | 55.1 | 61.2 | 74.8 | 1 | 5 | 98.0 | 15.3 |
| 1.5KE68A | 58.1 | 64.6 | 71.4 | 1 | 5 | 92.0 | 16.3 |
| 1.5KE75 | 60.7 | 67.5 | 82.5 | 1 | 5 | 108.0 | 13.9 |
| 1.5KE75A | 64.1 | 71.3 | 78.8 | 1 | 5 | 103.0 | 14.6 |
| 1.5KE82 | 66.4 | 73.8 | 90.2 | 1 | 5 | 118.0 | 12.7 |
| 1.5KE82A | 70.1 | 77.9 | 86.1 | 1 | 5 | 113.0 | 13.3 |
| 1.5KE91 | 73.7 | 81.9 | 100.0 | 1 | 5 | 131.0 | 11.4 |
| 1.5KE91A | 77.8 | 86.5 | 95.5 | 1 | 5 | 125.0 | 12.0 |
| 1.5KE100 | 81.0 | 90.0 | 110.0 | 1 | 5 | 144.0 | 10.4 |
| 1.5KE100A | 85.5 | 95.0 | 105.0 | 1 | 5 | 137.0 | 11.0 |

Metal hermetically sealed (DO13) version of this diode is available upon request.

* = Add "C" or "CA" suffix for bidirectional device types.

+ = For Bidirectional Types Having VWM \leq 10V, their ID limit is doubled.

= See General Information for Impulse Current Waveform.

1.5KE Series – 1500 Watt (continued)**Electrical Characteristics (continued)**

| Part Number* | Rated Standoff Voltage | Breakdown Voltage | | | Maximum Stand By Current @VWM+ Id | 10/1000µs Maximum Clamping Voltage @Ippm# Vc Max | 10/1000µs Rated Peak Impulse Current Ippm# |
|--------------|------------------------|-------------------|-------|------|-----------------------------------|--|--|
| | | Vbr (Volts) | | @It | | | |
| | Vwm (Volts) | Min | Max | (mA) | (µA) | (Volts) | (Amperes) |
| 1.5KE110 | 89.2 | 99.0 | 121.0 | 1 | 5 | 158.0 | 9.5 |
| 1.5KE110A | 94.0 | 105.0 | 116.0 | 1 | 5 | 152.0 | 9.9 |
| 1.5KE120 | 97.2 | 108.0 | 132.0 | 1 | 5 | 173.0 | 8.7 |
| 1.5KE120A | 102.0 | 114.0 | 126.0 | 1 | 5 | 165.0 | 9.1 |
| 1.5KE130 | 105.0 | 117.0 | 143.0 | 1 | 5 | 187.0 | 8.0 |
| 1.5KE130A | 111.0 | 124.0 | 137.0 | 1 | 5 | 179.0 | 8.4 |
| 1.5KE150 | 121.0 | 135.0 | 165.0 | 1 | 5 | 215.0 | 7.0 |
| 1.5KE150A | 128.0 | 143.0 | 158.0 | 1 | 5 | 207.0 | 7.2 |
| 1.5KE160 | 130.0 | 144.0 | 176.0 | 1 | 5 | 230.0 | 6.5 |
| 1.5KE160A | 136.0 | 152.0 | 168.0 | 1 | 5 | 219.0 | 6.8 |
| 1.5KE170 | 138.0 | 153.0 | 187.0 | 1 | 5 | 244.0 | 6.2 |
| 1.5KE170A | 145.0 | 162.0 | 179.0 | 1 | 5 | 234.0 | 6.4 |
| 1.5KE180 | 146.0 | 162.0 | 198.0 | 1 | 5 | 258.0 | 5.8 |
| 1.5KE180A | 154.0 | 171.0 | 189.0 | 1 | 5 | 246.0 | 6.1 |
| 1.5KE200 | 162.0 | 180.0 | 220.0 | 1 | 5 | 287.0 | 5.2 |
| 1.5KE200A | 171.0 | 190.0 | 210.0 | 1 | 5 | 274.0 | 5.5 |
| 1.5KE220 | 175.0 | 198.0 | 242.0 | 1 | 5 | 344.0 | 4.3 |
| 1.5KE220A | 185.0 | 209.0 | 231.0 | 1 | 5 | 328.0 | 4.6 |
| 1.5KE250 | 202.0 | 225.0 | 275.0 | 1 | 5 | 360.0 | 5.0 |
| 1.5KE250A | 214.0 | 237.0 | 263.0 | 1 | 5 | 344.0 | 5.0 |
| 1.5KE300 | 243.0 | 270.0 | 330.0 | 1 | 5 | 430.0 | 5.0 |
| 1.5KE300A | 256.0 | 285.0 | 315.0 | 1 | 5 | 414.0 | 5.0 |
| 1.5KE350 | 284.0 | 315.0 | 385.0 | 1 | 5 | 504.0 | 4.0 |
| 1.5KE350A | 300.0 | 332.0 | 368.0 | 1 | 5 | 482.0 | 4.0 |
| 1.5KE400 | 324.0 | 360.0 | 440.0 | 1 | 5 | 574.0 | 4.0 |
| 1.5KE400A | 342.0 | 380.0 | 420.0 | 1 | 5 | 548.0 | 4.0 |
| 1.5KE440 | 356.0 | 396.0 | 484.0 | 1 | 5 | 631.0 | 2.4 |
| 1.5KE440A | 376.0 | 418.0 | 462.0 | 1 | 5 | 600.0 | 2.6 |

Metal hermetically sealed (DO13) version of this diode is available upon request.

* = Add "C" or "CA" suffix for bidirectional device types.

+ = For Bidirectional Types Having VWM <= 10V, their ID limit is doubled.

= See General Information for Impulse Current Waveform.

3KP Series – 3000 Watt




3KP Series Features

- RoHS Compliance Standard
- 3000 watt peak pulse power dissipation
- Available in voltages from 10V to 220V
- Unidirectional and Bidirectional
- Glass passivated junction
- Low clamping factor
- Available in bulk or tape and reel (Reel quantity = 800 pieces)
- Each device 100% surge tested
- UL 497B Recognized, File # E135015
- Tape and Reel to EIA Standard RS-296-E


Absolute Maximum Ratings

| Parameter | Value |
|---|------------------|
| Peak pulse power dissipation (PPPM) at 25°C | 3000W |
| Steady state power dissipation at lead temperature = 75°C (Lead length 3/8" min.) | 8W |
| Operating and storage temperatures | -55°C to + 175°C |

Mechanical Dimensions

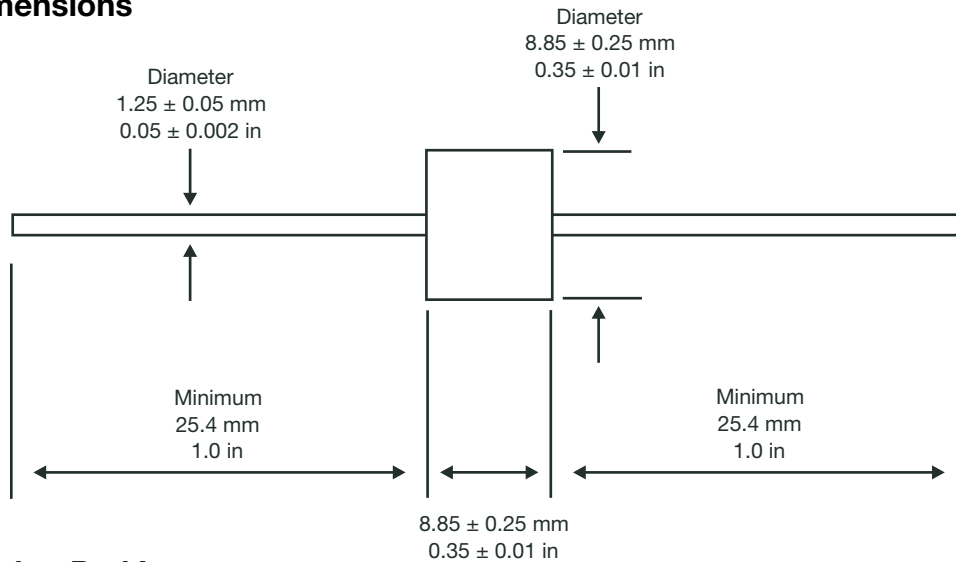

Standard Mounting Pad Layout

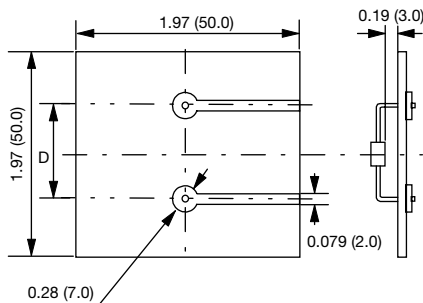

NOTE: Dimension D
 a.) 1.5KE (DO-201 Package) - 0.611 (15.5)
 b.) 3KP / 5KP / 15KP (R-6 Package) - 0.673 (17.1)
Hole Diameter
 a.) 0.059 (1.5)

All dimensions in inches and (millimeters)

3KP Series – 3000 Watt (continued)**Electrical Characteristics**

| Part Number* | Rated Standoff Voltage | Breakdown Voltage | | | Maximum Stand By Current @VWM+ Id | 10/1000µs Maximum Clamping Voltage @Ippm# Vc Max | 10/1000µs Rated Peak Impulse Current Ippm# |
|--------------|------------------------|-------------------|-------|------|-----------------------------------|--|--|
| | | Vbr (Volts) | | @It | | | |
| | Vwm (Volts) | Min | Max | (mA) | (µA) | (Volts) | (Amperes) |
| 3KP10 | 10.00 | 11.10 | 14.10 | 1 | 5 | 18.8 | 159.6 |
| 3KP10A | 10.00 | 11.10 | 12.80 | 1 | 5 | 17.0 | 176.4 |
| 3KP11 | 11.00 | 12.20 | 15.40 | 1 | 5 | 20.1 | 149.2 |
| 3KP11A | 11.00 | 12.20 | 14.00 | 1 | 5 | 18.2 | 184.8 |
| 3KP12 | 12.00 | 13.30 | 16.90 | 1 | 5 | 22.0 | 136.4 |
| 3KP12A | 12.00 | 13.30 | 15.30 | 1 | 5 | 19.9 | 150.6 |
| 3KP13 | 13.00 | 14.40 | 18.20 | 1 | 5 | 23.8 | 126.0 |
| 3KP13A | 13.00 | 14.40 | 16.50 | 1 | 5 | 21.5 | 139.4 |
| 3KP14 | 14.00 | 15.60 | 19.80 | 1 | 5 | 25.8 | 116.2 |
| 3KP14A | 14.00 | 15.60 | 17.90 | 1 | 5 | 23.2 | 129.4 |
| 3KP15 | 15.00 | 16.70 | 21.10 | 1 | 5 | 26.9 | 111.6 |
| 3KP15A | 15.00 | 16.70 | 19.20 | 1 | 5 | 24.4 | 123.0 |
| 3KP16 | 16.00 | 17.80 | 22.60 | 1 | 5 | 28.8 | 104.2 |
| 3KP16A | 16.00 | 17.80 | 20.50 | 1 | 5 | 26.0 | 115.4 |
| 3KP17 | 17.00 | 18.90 | 23.90 | 1 | 5 | 30.5 | 98.4 |
| 3KP17A | 17.00 | 18.90 | 21.70 | 1 | 5 | 27.6 | 106.6 |
| 3KP18 | 18.00 | 20.00 | 25.30 | 1 | 5 | 32.2 | 93.2 |
| 3KP18A | 18.00 | 20.00 | 23.30 | 1 | 5 | 29.2 | 102.8 |
| 3KP20 | 20.00 | 22.20 | 28.10 | 1 | 5 | 35.8 | 83.8 |
| 3KP20A | 20.00 | 22.20 | 25.50 | 1 | 5 | 32.4 | 92.6 |
| 3KP22 | 22.00 | 24.40 | 30.90 | 1 | 5 | 39.4 | 76.2 |
| 3KP22A | 22.00 | 24.40 | 28.00 | 1 | 5 | 35.5 | 84.4 |
| 3KP24 | 24.00 | 26.70 | 33.80 | 1 | 5 | 43.0 | 69.8 |
| 3KP24A | 24.00 | 26.70 | 30.70 | 1 | 5 | 38.9 | 77.2 |
| 3KP26 | 26.00 | 28.90 | 36.60 | 1 | 5 | 46.6 | 64.4 |
| 3KP26A | 26.00 | 28.90 | 33.20 | 1 | 5 | 42.1 | 71.2 |

Add "C" or "CA" suffix for bidirectional device types.

+ = For Bidirectional Types Having VWM <= 10V, their ID limit is doubled.

= See General Information for Impulse Current Waveform.

3KP Series – 3000 Watt (continued)**Electrical Characteristics (continued)**

| Part Number* | Rated Standoff Voltage | Breakdown Voltage | | | Maximum Stand By Current @VWM+ Id | 10/1000 μ s Maximum Clamping Voltage @Ippm# Vc Max | 10/1000 μ s Rated Peak Impulse Current Ippm# |
|--------------|------------------------|-------------------|--------|------|-----------------------------------|--|--|
| | | Vbr (Volts) | | @It | | | |
| | Vwm (Volts) | Min | Max | (mA) | (μ A) | (Volts) | (Amperes) |
| 3KP28 | 28.00 | 31.10 | 39.40 | 1 | 5 | 50.0 | 60.0 |
| 3KP28A | 28.00 | 31.10 | 35.80 | 1 | 5 | 45.4 | 66.0 |
| 3KP30 | 30.00 | 33.30 | 42.20 | 1 | 5 | 53.5 | 56.0 |
| 3KP30A | 30.00 | 33.30 | 38.30 | 1 | 5 | 48.4 | 62.0 |
| 3KP33 | 33.00 | 36.70 | 46.50 | 1 | 5 | 59.0 | 50.4 |
| 3KP33A | 33.00 | 36.70 | 42.20 | 1 | 5 | 53.3 | 56.2 |
| 3KP36 | 36.00 | 40.00 | 50.70 | 1 | 5 | 64.3 | 46.6 |
| 3KP36A | 36.00 | 40.00 | 46.00 | 1 | 5 | 58.1 | 51.6 |
| 3KP40 | 40.00 | 44.40 | 53.30 | 1 | 5 | 71.4 | 42.0 |
| 3KP40A | 40.00 | 44.40 | 51.10 | 1 | 5 | 64.5 | 46.4 |
| 3KP43 | 43.00 | 47.80 | 60.50 | 1 | 5 | 76.7 | 39.2 |
| 3KP43A | 43.00 | 47.80 | 54.90 | 1 | 5 | 69.4 | 43.2 |
| 3KP45 | 45.00 | 50.00 | 63.30 | 1 | 5 | 80.3 | 37.4 |
| 3KP45A | 45.00 | 50.00 | 57.50 | 1 | 5 | 72.7 | 41.2 |
| 3KP48 | 48.00 | 53.30 | 67.50 | 1 | 5 | 85.5 | 35.0 |
| 3KP48A | 48.00 | 53.30 | 61.30 | 1 | 5 | 77.4 | 38.8 |
| 3KP51 | 51.00 | 56.70 | 71.80 | 1 | 5 | 91.1 | 37.0 |
| 3KP51A | 51.00 | 56.70 | 65.20 | 1 | 5 | 82.4 | 36.4 |
| 3KP54 | 54.00 | 60.00 | 76.00 | 1 | 5 | 96.3 | 31.2 |
| 3KP54A | 54.00 | 60.00 | 69.00 | 1 | 5 | 87.1 | 34.4 |
| 3KP58 | 58.00 | 64.40 | 81.60 | 1 | 5 | 103.0 | 29.2 |
| 3KP58A | 58.00 | 64.40 | 74.10 | 1 | 5 | 93.6 | 32.0 |
| 3KP60 | 60.00 | 66.70 | 84.50 | 1 | 5 | 107.0 | 28.0 |
| 3KP60A | 60.00 | 66.70 | 76.70 | 1 | 5 | 96.8 | 31.0 |
| 3KP64 | 64.00 | 71.10 | 90.10 | 1 | 5 | 114.0 | 26.4 |
| 3KP64A | 64.00 | 71.10 | 81.80 | 1 | 5 | 103.0 | 29.2 |
| 3KP70 | 70.00 | 77.80 | 98.60 | 1 | 5 | 125.0 | 24.0 |
| 3KP70A | 70.00 | 77.80 | 89.50 | 1 | 5 | 113.0 | 26.6 |
| 3KP75 | 75.00 | 83.30 | 105.70 | 1 | 5 | 134.0 | 22.4 |
| 3KP75A | 75.00 | 83.30 | 98.80 | 1 | 5 | 121.0 | 24.8 |

Add "C" or "CA" suffix for bidirectional device types.

+ = For Bidirectional Types Having VWM \leq 10V, their ID limit is doubled.

= See General Information for Impulse Current Waveform.

3KP Series – 3000 Watt (continued)**Electrical Characteristics (continued)**

| Part Number* | Rated Standoff Voltage | Breakdown Voltage | | | Maximum Stand By Current @VWM+ Id | 10/1000µs Maximum Clamping Voltage @Ippm# Vc Max | 10/1000µs Rated Peak Impulse Current Ippm# |
|--------------|------------------------|-------------------|--------|------|-----------------------------------|--|--|
| | | Vbr (Volts) | | @It | | | |
| | Vwm (Volts) | Min | Max | (mA) | (µA) | (Volts) | (Amperes) |
| 3KP78 | 78.00 | 86.70 | 109.80 | 1 | 5 | 139.0 | 21.6 |
| 3KP78A | 78.00 | 86.70 | 99.70 | 1 | 5 | 126.0 | 22.8 |
| 3KP85 | 85.00 | 94.40 | 119.20 | 1 | 5 | 151.0 | 19.8 |
| 3KP85A | 85.00 | 94.40 | 108.20 | 1 | 5 | 137.0 | 20.8 |
| 3KP90 | 90.00 | 100.00 | 126.50 | 1 | 5 | 160.0 | 18.8 |
| 3KP90A | 90.00 | 100.00 | 115.50 | 1 | 5 | 146.0 | 20.6 |
| 3KP100 | 100.00 | 111.00 | 141.00 | 1 | 5 | 179.0 | 16.6 |
| 3KP100A | 100.00 | 111.00 | 128.00 | 1 | 5 | 162.0 | 18.6 |
| 3KP110 | 110.00 | 122.00 | 154.50 | 1 | 5 | 196.0 | 15.4 |
| 3KP110A | 110.00 | 122.00 | 140.50 | 1 | 5 | 177.0 | 16.8 |
| 3KP120 | 120.00 | 133.00 | 169.00 | 1 | 5 | 214.0 | 14.0 |
| 3KP120A | 120.00 | 133.00 | 153.00 | 1 | 5 | 193.0 | 15.6 |
| 3KP130 | 130.00 | 144.00 | 182.50 | 1 | 5 | 231.0 | 13.0 |
| 3KP130A | 130.00 | 144.00 | 165.50 | 1 | 5 | 209.0 | 14.4 |
| 3KP150 | 150.00 | 167.00 | 211.50 | 1 | 5 | 268.0 | 11.2 |
| 3KP150A | 150.00 | 167.00 | 192.50 | 1 | 5 | 243.0 | 12.4 |
| 3KP160 | 160.00 | 178.00 | 226.00 | 1 | 5 | 287.0 | 10.4 |
| 3KP160A | 160.00 | 178.00 | 205.00 | 1 | 5 | 259.0 | 11.6 |
| 3KP170 | 170.00 | 189.00 | 239.50 | 1 | 5 | 304.0 | 9.8 |
| 3KP170A | 170.00 | 189.00 | 217.50 | 1 | 5 | 275.0 | 11.0 |
| 3KP180 | 180.00 | 198.00 | 242.00 | 1 | 5 | 322.0 | 9.3 |
| 3KP180A | 180.00 | 198.00 | 218.80 | 1 | 5 | 292.0 | 10.3 |
| 3KP190 | 190.00 | 209.00 | 255.40 | 1 | 5 | 340.0 | 8.8 |
| 3KP190A | 190.00 | 209.00 | 231.00 | 1 | 5 | 308.0 | 9.7 |
| 3KP200 | 200.00 | 220.00 | 268.80 | 1 | 5 | 358.0 | 8.4 |
| 3KP200A | 200.00 | 220.00 | 243.20 | 1 | 5 | 324.0 | 9.3 |
| 3KP210 | 210.00 | 231.00 | 282.20 | 1 | 5 | 376.0 | 8.0 |
| 3KP210A | 210.00 | 231.00 | 255.30 | 1 | 5 | 340.0 | 8.8 |
| 3KP220 | 220.00 | 242.00 | 295.70 | 1 | 5 | 394.0 | 7.6 |
| 3KP220A | 220.00 | 242.00 | 267.50 | 1 | 5 | 356.0 | 8.4 |

Add "C" or "CA" suffix for bidirectional device types.

+ = For Bidirectional Types Having VWM <= 10V, their ID limit is doubled.

= See General Information for Impulse Current Waveform.

5KP Series –5000 Watt




5KP Series Features

- RoHS Compliance Standard
- 5000 watt peak pulse power dissipation
- Available in voltages from 5V to 180V
- Unidirectional and Bidirectional
- Glass passivated junction
- Low clamping factor
- Available in bulk or tape and reel (Reel quantity = 800 pieces)
- Each device 100% surge tested
- UL 497B Recognized, File # E135015
- Tape and Reel to EIA Standard RS-296-E


Absolute Maximum Ratings

| Parameter | Value |
|---|------------------|
| Peak pulse power dissipation (PPPM) at 25°C | 5000W |
| Steady state power dissipation at lead temperature = 75°C (Lead length 3/8" min.) | 8W |
| Operating and storage temperatures | -55°C to + 175°C |

Mechanical Dimensions

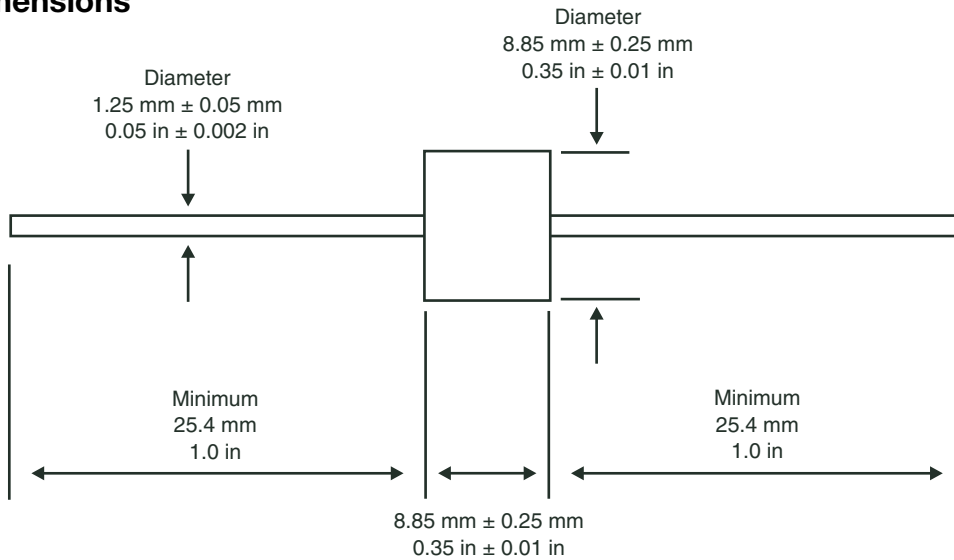

Standard Mounting Pad Layout

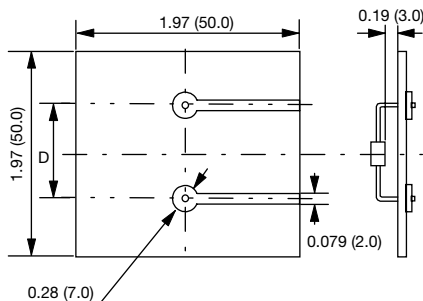

NOTE: Dimension D

- a.) 1.5KE (DO-201 Package) - 0.611 (15.5)
- b.) 3KP / 5KP /15KP (R-6 Package) - 0.673 (17.1)

Hole Diameter

- a.) 0.059 (1.5)

All dimensions in inches and (millimeters)

5KP Series – 5000 Watt (continued)**Electrical Characteristics**

| Part Number* | Rated Standoff Voltage | Breakdown Voltage | | | Maximum Stand By Current @VWM+ Id | 10/1000µs Maximum Clamping Voltage @Ippm# Vc Max | 10/1000µs Rated Peak Impulse Current Ippm# |
|--------------|------------------------|-------------------|-------|------|-----------------------------------|--|--|
| | | Vbr (Volts) | | @It | | | |
| | Vwm (Volts) | Min | Max | (mA) | (µA) | (Volts) | (Amperes) |
| 5KP5.0 | 5.0 | 6.40 | 7.30 | 50 | 5000 | 9.6 | 520.0 |
| 5KP5.0A | 5.0 | 6.40 | 7.00 | 50 | 5000 | 9.2 | 543.0 |
| 5KP6.0 | 6.0 | 6.67 | 8.15 | 50 | 5000 | 11.4 | 439.0 |
| 5KP6.0A | 6.0 | 6.67 | 7.37 | 50 | 5000 | 10.3 | 485.0 |
| 5KP6.5 | 6.5 | 7.22 | 8.82 | 50 | 2000 | 12.3 | 407.0 |
| 5KP6.5A | 6.5 | 7.22 | 7.98 | 50 | 2000 | 11.2 | 447.0 |
| 5KP7.0 | 7.0 | 7.78 | 9.51 | 50 | 1000 | 13.3 | 378.0 |
| 5KP7.0A | 7.0 | 7.78 | 8.60 | 50 | 1000 | 12.0 | 417.0 |
| 5KP7.5 | 7.5 | 8.33 | 10.20 | 5.0 | 250 | 14.3 | 350.0 |
| 5KP7.5A | 7.5 | 8.33 | 9.21 | 5.0 | 250 | 12.9 | 388.0 |
| 5KP8.0 | 8.0 | 8.89 | 10.90 | 5.0 | 150 | 15.0 | 333.0 |
| 5KP8.0A | 8.0 | 8.89 | 9.83 | 5.0 | 150 | 13.6 | 367.0 |
| 5KP8.5 | 8.5 | 9.44 | 11.50 | 5.0 | 50 | 15.9 | 314.0 |
| 5KP8.5A | 8.5 | 9.44 | 10.40 | 5.0 | 50 | 14.4 | 347.0 |
| 5KP9.0 | 9.0 | 10.00 | 12.20 | 5.0 | 20 | 16.9 | 295.0 |
| 5KP9.0A | 9.0 | 10.00 | 11.10 | 5.0 | 20 | 15.4 | 325.0 |
| 5KP10 | 10.0 | 11.1 | 13.6 | 5.0 | 15 | 18.8 | 266.0 |
| 5KP10A | 10.0 | 11.1 | 12.3 | 5.0 | 15 | 17.0 | 294.0 |
| 5KP11 | 11.0 | 12.2 | 14.9 | 5.0 | 10 | 20.1 | 249.0 |
| 5KP11A | 11.0 | 12.2 | 13.5 | 5.0 | 10 | 18.2 | 274.0 |
| 5KP12 | 12.0 | 13.3 | 16.3 | 5.0 | 10 | 22.0 | 227.0 |
| 5KP12A | 12.0 | 13.3 | 14.7 | 5.0 | 10 | 19.9 | 251.0 |
| 5KP13 | 13.0 | 14.4 | 17.6 | 5.0 | 10 | 23.8 | 210.0 |
| 5KP13A | 13.0 | 14.4 | 15.9 | 5.0 | 10 | 21.5 | 232.0 |
| 5KP14 | 14.0 | 15.6 | 19.1 | 5.0 | 10 | 25.8 | 194.0 |
| 5KP14A | 14.0 | 15.6 | 17.2 | 5.0 | 10 | 23.2 | 215.0 |
| 5KP15 | 15.0 | 16.7 | 20.4 | 5.0 | 10 | 26.9 | 188.0 |
| 5KP15A | 15.0 | 16.7 | 18.5 | 5.0 | 10 | 24.4 | 206.0 |
| 5KP16 | 16.0 | 17.8 | 21.8 | 5.0 | 10 | 28.8 | 176.0 |
| 5KP16A | 16.0 | 17.8 | 19.7 | 5.0 | 10 | 26.0 | 192.0 |

* = Add "C" or "CA" suffix for bidirectional device types.

+ = For Bidirectional Types Having VWM <= 10V, their ID limit is doubled.

= See General Information for Impulse Current Waveform

5KP Series – 5000 Watt (continued)**Electrical Characteristics (continued)**

| Part Number* | Rated Standoff Voltage | Breakdown Voltage | | | Maximum Stand By Current @VWM+ Id | 10/1000µs Maximum Clamping Voltage @Ippm# Vc Max | 10/1000µs Rated Peak Impulse Current Ippm# |
|--------------|------------------------|-------------------|------|------|-----------------------------------|--|--|
| | | Vbr (Volts) | | @It | | | |
| | Vwm (Volts) | Min | Max | (mA) | (µA) | (Volts) | (Amperes) |
| 5KP17 | 17.0 | 18.9 | 23.1 | 5.0 | 10 | 30.5 | 164.0 |
| 5KP17A | 17.0 | 18.9 | 20.9 | 5.0 | 10 | 27.6 | 181.0 |
| 5KP18 | 18.0 | 20.0 | 24.4 | 5.0 | 10 | 32.2 | 155.0 |
| 5KP18A | 18.0 | 20.0 | 22.1 | 5.0 | 10 | 29.2 | 172.0 |
| 5KP20 | 20.0 | 22.2 | 27.1 | 5.0 | 10 | 35.8 | 139.0 |
| 5KP20A | 20.0 | 22.2 | 24.5 | 5.0 | 10 | 32.4 | 154.0 |
| 5KP22 | 22.0 | 24.4 | 29.8 | 5.0 | 10 | 39.4 | 127.0 |
| 5KP22A | 22.0 | 24.4 | 26.9 | 5.0 | 10 | 35.5 | 141.0 |
| 5KP24 | 24.0 | 26.7 | 32.6 | 5.0 | 10 | 43.0 | 116.0 |
| 5KP24A | 24.0 | 26.7 | 29.5 | 5.0 | 10 | 38.9 | 128.0 |
| 5KP26 | 26.0 | 28.9 | 35.3 | 5.0 | 10 | 46.6 | 107.0 |
| 5KP26A | 26.0 | 28.9 | 31.9 | 5.0 | 10 | 42.1 | 119.0 |
| 5KP28 | 28.0 | 31.1 | 39.0 | 5.0 | 10 | 50.1 | 99.0 |
| 5KP28A | 28.0 | 31.1 | 34.4 | 5.0 | 10 | 45.5 | 110.0 |
| 5KP30 | 30.0 | 33.3 | 40.7 | 5.0 | 10 | 53.5 | 93.0 |
| 5KP30A | 30.0 | 33.3 | 36.8 | 5.0 | 10 | 48.4 | 103.0 |
| 5KP33 | 33.0 | 36.7 | 44.9 | 5.0 | 10 | 59.0 | 85.0 |
| 5KP33A | 33.0 | 36.7 | 40.6 | 5.0 | 10 | 53.3 | 94.0 |
| 5KP36 | 36.0 | 40.0 | 48.9 | 5.0 | 10 | 64.3 | 78.0 |
| 5KP36A | 36.0 | 40.0 | 44.2 | 5.0 | 10 | 58.1 | 86.0 |
| 5KP40 | 40.0 | 44.4 | 54.3 | 5.0 | 10 | 71.4 | 70.0 |
| 5KP40A | 40.0 | 44.4 | 49.1 | 5.0 | 10 | 64.5 | 78.0 |
| 5KP43 | 43.0 | 47.8 | 58.4 | 5.0 | 10 | 76.7 | 65.0 |
| 5KP43A | 43.0 | 47.8 | 52.8 | 5.0 | 10 | 69.4 | 72.0 |
| 5KP45 | 45.0 | 50.0 | 61.1 | 5.0 | 10 | 80.3 | 62.0 |
| 5KP45A | 45.0 | 50.0 | 55.3 | 5.0 | 10 | 72.7 | 69.0 |
| 5KP48 | 48.0 | 53.3 | 65.2 | 5.0 | 10 | 85.5 | 58.0 |
| 5KP48A | 48.0 | 53.3 | 58.9 | 5.0 | 10 | 77.4 | 65.0 |
| 5KP51 | 51.0 | 56.7 | 69.3 | 5.0 | 10 | 91.1 | 55.0 |
| 5KP51A | 51.0 | 56.7 | 62.7 | 5.0 | 10 | 82.4 | 61.0 |

* = Add "C" or "CA" suffix for bidirectional device types.

+ = For Bidirectional Types Having VWM <= 10V, their ID limit is doubled.

= See General Information for Impulse Current Waveform

5KP Series – 5000 Watt (continued)**Electrical Characteristics (continued)**

| Part Number* | Rated Standoff Voltage | Breakdown Voltage | | | Maximum Stand By Current @VWM+ Id | 10/1000 μ s Maximum Clamping Voltage @Ippm# Vc Max | 10/1000 μ s Rated Peak Impulse Current Ippm# |
|--------------|------------------------|-------------------|-------|------|-----------------------------------|--|--|
| | | Vbr (Volts) | | @It | | | |
| | Vwm (Volts) | Min | Max | (mA) | (μ A) | (Volts) | (Amperes) |
| 5KP54 | 54.0 | 60.0 | 73.3 | 5.0 | 10 | 96.3 | 52.0 |
| 5KP54A | 54.0 | 60.0 | 66.3 | 5.0 | 10 | 87.1 | 57.0 |
| 5KP58 | 58.0 | 64.4 | 78.7 | 5.0 | 10 | 103.0 | 49.0 |
| 5KP58A | 58.0 | 64.4 | 71.2 | 5.0 | 10 | 93.6 | 53.0 |
| 5KP60 | 60.0 | 66.7 | 81.5 | 5.0 | 10 | 107.0 | 47.0 |
| 5KP60A | 60.0 | 66.7 | 73.7 | 5.0 | 10 | 96.8 | 52.0 |
| 5KP60B | 60.0 | 68 | 72 | 5.0 | 10 | 96.8 | 51.7 |
| 5KP64 | 64.0 | 71.1 | 96.9 | 5.0 | 10 | 114.0 | 44.0 |
| 5KP64A | 64.0 | 71.1 | 78.6 | 5.0 | 10 | 103.0 | 49.0 |
| 5KP70 | 70.0 | 77.6 | 95.1 | 5.0 | 10 | 125.0 | 40.0 |
| 5KP70A | 70.0 | 77.6 | 86.0 | 5.0 | 10 | 113.0 | 44.0 |
| 5KP75 | 75.0 | 83.3 | 102.0 | 5.0 | 10 | 134.0 | 37.0 |
| 5KP75A | 75.0 | 83.3 | 92.1 | 5.0 | 10 | 121.0 | 41.0 |
| 5KP78 | 78.0 | 86.7 | 106.0 | 5.0 | 10 | 139.0 | 36.0 |
| 5KP78A | 78.0 | 86.7 | 95.8 | 5.0 | 10 | 126.0 | 40.0 |
| 5KP85 | 85.0 | 94.4 | 115.0 | 5.0 | 10 | 151.0 | 33.0 |
| 5KP85A | 85.0 | 94.4 | 104.0 | 5.0 | 10 | 137.0 | 36.0 |
| 5KP90 | 90.0 | 100.0 | 122.0 | 5.0 | 10 | 160.0 | 31.0 |
| 5KP90A | 90.0 | 100.0 | 111.0 | 5.0 | 10 | 146.0 | 34.0 |
| 5KP100 | 100.0 | 111.0 | 136.0 | 5.0 | 10 | 179.0 | 28.0 |
| 5KP110 | 110.0 | 122.0 | 149.0 | 5.0 | 10 | 196.0 | 26.0 |
| 5KP120 | 120.0 | 133.0 | 163.0 | 5.0 | 10 | 215.0 | 23.0 |
| 5KP150 | 150.0 | 166.0 | 204.0 | 5.0 | 10 | 268.0 | 18.5 |
| 5KP180 | 180.0 | 200.0 | 244.0 | 5.0 | 10 | 320.0 | 15.0 |

* = Add "C" or "CA" suffix for bidirectional device types.

+ = For Bidirectional Types Having VWM \leq 10V, their ID limit is doubled.

= See General Information for Impulse Current Waveform

15KP Series –15000 Watt




15KP Series Features

- RoHS Compliance Standard
- 15000 watt peak pulse power dissipation
- Available in voltages from 30V to 200V
- Unidirectional and Bidirectional
- Glass passivated junction
- Low clamping factor
- Each device 100% surge tested
- Available in bulk or tape and reel (Reel quantity = 800 pieces)
- UL 497B Recognized, File # E135015
- Tape and Reel to EIA Standard RS-296-E


Absolute Maximum Ratings

| Parameter | Value |
|---|-----------------|
| Peak pulse power dissipation (PPPM) at 25°C | 15000W |
| Steady state power dissipation at lead temperature = 75°C (Lead length 3/8" min.) | 8W |
| Operating and storage temperatures | -55°C to +175°C |

Mechanical Dimensions

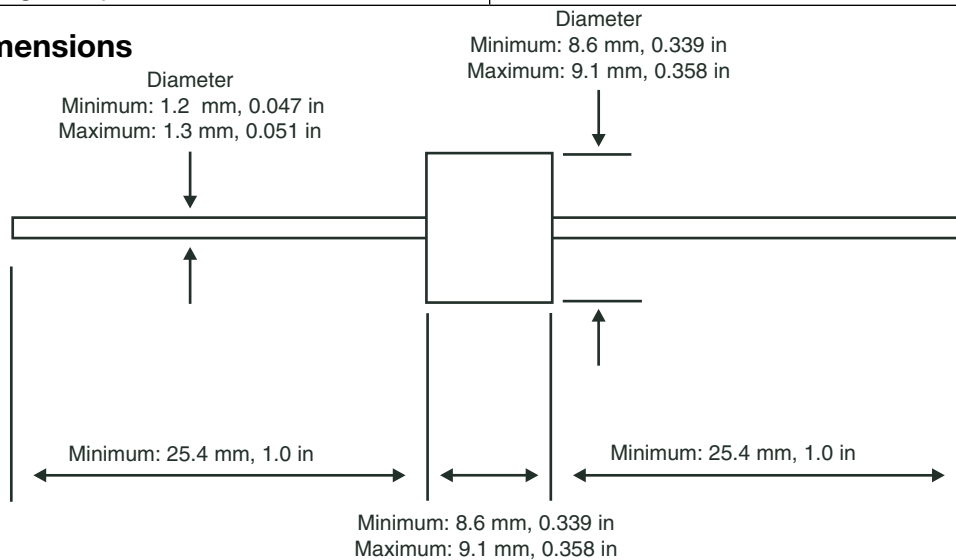

Standard Mounting Pad Layout

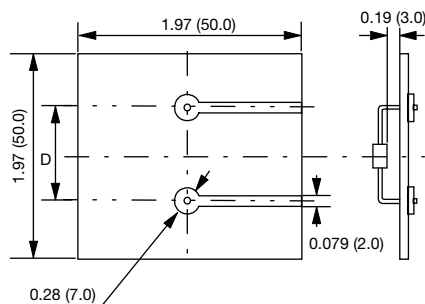

NOTE: Dimension D

- a.) 1.5KE (DO-201 Package) - 0.611 (15.5)
- b.) 3KP / 5KP / 15KP (R-6 Package) - 0.673 (17.1)

Hole Diameter

- a.) 0.059 (1.5)

All dimensions in inches and (millimeters)

15KP Series – 15000 Watt (continued)**Electrical Characteristics**

| Part Number* | Rated Standoff Voltage V _{wm} | Breakdown Voltage | | Maximum Stand By Current @V _{wm} + I _d | 10/1000 μ s Maximum Clamping Voltage @I _{ppm} # V _c Max | 10/1000 μ s Rated Peak Impulse Current I _{ppm} # |
|--------------|---|-------------------------|-----------------|---|---|---|
| | | V _{br} (Volts) | @I _t | | | |
| | V _{wm} (Volts) | Min | (mA) | (μ A) | (Volts) | (Amperes) |
| 15KP30 | 30 | 33.3 | 5 | 15 | 56.2 | 267.0 |
| 15KP30A | 30 | 33.3 | 5 | 15 | 50.7 | 296.0 |
| 15KP33 | 33 | 36.7 | 5 | 10 | 60.6 | 248.0 |
| 15KP33A | 33 | 36.7 | 5 | 10 | 54.8 | 274.0 |
| 15KP36 | 36 | 40.0 | 5 | 10 | 66.0 | 227.0 |
| 15KP36A | 36 | 40.0 | 5 | 10 | 59.7 | 251.0 |
| 15KP40 | 40 | 44.4 | 5 | 10 | 72.8 | 206.0 |
| 15KP40A | 40 | 44.4 | 5 | 10 | 65.8 | 228.0 |
| 15KP43 | 43 | 47.8 | 5 | 10 | 77.1 | 195.0 |
| 15KP43A | 43 | 47.8 | 5 | 10 | 69.7 | 215.0 |
| 15KP45 | 45 | 50.0 | 5 | 10 | 80.7 | 186.0 |
| 15KP45A | 45 | 50.0 | 5 | 10 | 73.0 | 205.0 |
| 15KP48 | 48 | 53.3 | 5 | 10 | 85.9 | 175.0 |
| 15KP48A | 48 | 53.3 | 5 | 10 | 77.7 | 193.0 |
| 15KP51 | 51 | 56.7 | 5 | 10 | 91.5 | 164.0 |
| 15KP51A | 51 | 56.7 | 5 | 10 | 82.8 | 181.0 |
| 15KP54 | 54 | 60.0 | 5 | 10 | 96.8 | 155.0 |
| 15KP54A | 54 | 60.0 | 5 | 10 | 87.5 | 171.0 |
| 15KP58 | 58 | 64.4 | 5 | 10 | 104.0 | 144.0 |
| 15KP58A | 58 | 64.4 | 5 | 10 | 94.0 | 160.0 |
| 15KP60 | 60 | 66.7 | 5 | 10 | 107.0 | 140.0 |
| 15KP60A | 60 | 66.7 | 5 | 10 | 97.3 | 154.0 |
| 15KP64 | 64 | 71.1 | 5 | 10 | 115.0 | 130.0 |
| 15KP64A | 64 | 71.1 | 5 | 10 | 104.0 | 144.0 |
| 15KP70 | 70 | 77.8 | 5 | 10 | 126.0 | 119.0 |
| 15KP70A | 70 | 77.8 | 5 | 10 | 114.0 | 132.0 |
| 15KP75 | 75 | 83.3 | 5 | 10 | 135.0 | 111.0 |
| 15KP75A | 75 | 83.3 | 5 | 10 | 122.0 | 123.0 |
| 15KP78 | 78 | 86.7 | 5 | 10 | 140.0 | 107.0 |
| 15KP78A | 78 | 86.7 | 5 | 10 | 126.0 | 119.0 |

* = Add "C" or "CA" suffix for bidirectional device types.

= See General Information for Impulse Current Waveform

15KP Series – 15000 Watt (continued)**Electrical Characteristics (continued)**

| Part Number* | Rated Standoff Voltage V _{wm} | Breakdown Voltage | | Maximum Stand By Current @V _{wm} +I _d | 10/1000 μ s Maximum Clamping Voltage @I _{ppm} # V _c Max | 10/1000 μ s Rated Peak Impulse Current I _{ppm} # |
|--------------|---|-------------------------|-----------------|--|---|---|
| | | V _{br} (Volts) | @I _t | | | |
| | V _{wm} (Volts) | Min | (mA) | (μ A) | (Volts) | (Amperes) |
| 15KP85 | 85 | 94.4 | 5 | 10 | 152.0 | 99.0 |
| 15KP85A | 85 | 94.4 | 5 | 10 | 137.0 | 109.0 |
| 15KP90 | 90 | 100.0 | 5 | 10 | 160.0 | 94.0 |
| 15KP90A | 90 | 100.0 | 5 | 10 | 146.0 | 103.0 |
| 15KP100 | 100 | 111.0 | 5 | 10 | 179.0 | 84.0 |
| 15KP110 | 110 | 122.0 | 5 | 10 | 196.0 | 77.0 |
| 15KP120 | 120 | 133.0 | 5 | 10 | 214.0 | 70.0 |
| 15KP130 | 130 | 144.0 | 5 | 10 | 231.0 | 65.0 |
| 15KP150 | 150 | 167.0 | 5 | 10 | 268.0 | 56.0 |
| 15KP160 | 160 | 178.0 | 5 | 10 | 287.0 | 52.0 |
| 15KP170 | 170 | 189.0 | 5 | 10 | 304.0 | 49.0 |
| 15KP180 | 180 | 200.0 | 5 | 10 | 321.0 | 47.0 |
| 15KP200 | 200 | 222.0 | 5 | 10 | 356.0 | 42.0 |

* = Add "C" or "CA" suffix for bidirectional device types.

= See General Information for Impulse Current Waveform



20KP Series – 20000 Watt




20KP Series Features

- RoHS Compliance Standard
- 20000 watt peak pulse power dissipation
- Available in voltages from 20V to 300V
- Unidirectional and Bidirectional
- Glass passivated junction
- Low clamping factor
- Each device 100% surge tested
- Available in bulk or tape and reel (Reel quantity = 300 pieces)
- UL 497B Recognized, File # E135015
- Tape and Reel to EIA Standard RS-296-E


Absolute Maximum Ratings

| Parameter | Value |
|---|-----------------|
| Peak pulse power dissipation (PPPM) at 25°C | 20000W |
| Steady state power dissipation at lead temperature = 75°C (Lead length 3/8" min.) | 8W |
| Operating and storage temperatures | -55°C to +175°C |

Mechanical Dimensions

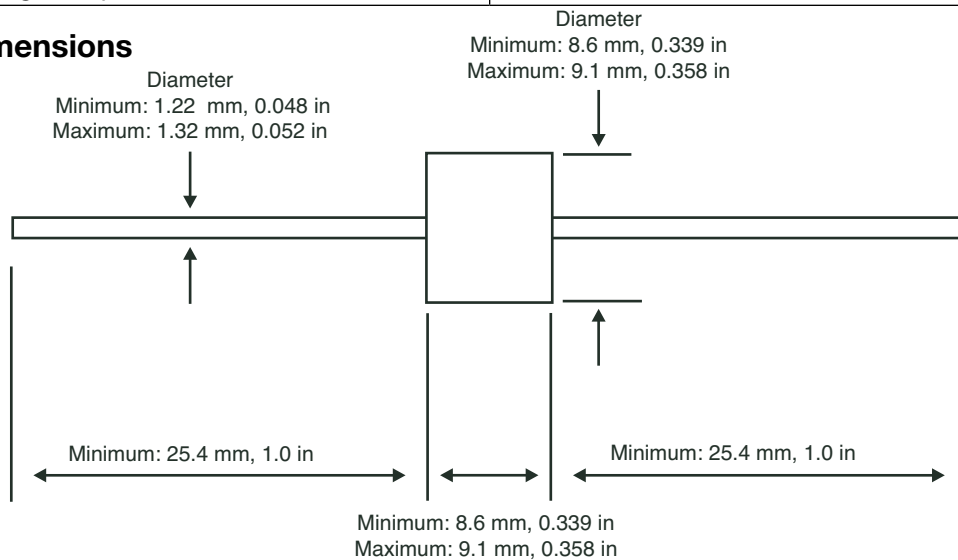

Standard Mounting Pad Layout

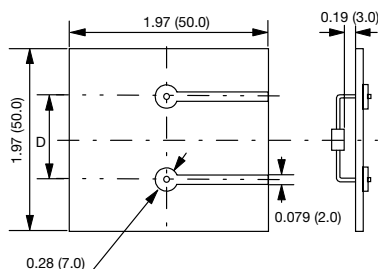

NOTE: Dimension D
 a.) 1.5KE (DO-201 Package) - 0.611 (15.5)
 b.) 3KP / 5KP / 15KP / 20KP / 30KP (R-6 Package) - 0.673 (17.1)

Hole Diameter
 a.) 0.059 (1.5)

All dimensions in inches and (millimeters)

20KP Series – 20000 Watt**Electrical Characteristics**

| Part Number* | Rated Standoff Voltage V _{wm} | Breakdown Voltage | | Maximum Stand By Current @V _{wm} + I _d | 10/1000 μ s Maximum Clamping Voltage @I _{ppm} # V _c Max | 10/1000 μ s Rated Peak Impulse Current I _{ppm} # |
|--------------|---|-------------------------|-----------------|--|--|---|
| | | V _{br} (Volts) | @I _t | | | |
| | V _{wm} (Volts) | Min | (mA) | (μ A) | (Volts) | (Amperes) |
| 20KP20A | 20 | 22.34 | 50 | 5000 | 36.8 | 548.9 |
| 20KP24A | 24 | 26.81 | 50 | 5000 | 41.2 | 490.3 |
| 20KP26A | 26 | 29.04 | 50 | 2000 | 44.7 | 451.9 |
| 20KP28A | 28 | 31.28 | 50 | 1000 | 48.0 | 420.8 |
| 20KP30A | 30 | 33.51 | 5 | 250 | 51.5 | 392.2 |
| 20KP32A | 32 | 35.74 | 5 | 50 | 54.3 | 372.0 |
| 20KP34A | 34 | 38.00 | 5 | 20 | 57.5 | 351.3 |
| 20KP36A | 36 | 40.20 | 5 | 15 | 61.5 | 328.5 |
| 20KP40A | 40 | 44.70 | 5 | 2 | 67.8 | 297.9 |
| 20KP44A | 44 | 49.10 | 5 | 2 | 72.7 | 277.9 |
| 20KP48A | 48 | 53.60 | 5 | 2 | 79.4 | 254.4 |
| 20KP52A | 52 | 58.10 | 5 | 2 | 85.8 | 235.4 |
| 20KP56A | 56 | 62.60 | 5 | 2 | 92.6 | 218.1 |
| 20KP60A | 60 | 67.00 | 5 | 2 | 97.6 | 207.0 |
| 20KP64A | 64 | 71.50 | 5 | 2 | 104.0 | 194.2 |
| 20KP68A | 68 | 76.00 | 5 | 2 | 110.0 | 183.6 |
| 20KP72A | 72 | 80.40 | 5 | 2 | 116.0 | 174.1 |
| 20KP80A | 80 | 89.40 | 5 | 2 | 130.0 | 155.4 |
| 20KP88A | 88 | 98.30 | 5 | 2 | 142.0 | 142.3 |
| 20KP96A | 96 | 107.20 | 5 | 2 | 155.0 | 130.3 |
| 20KP104A | 104 | 116.20 | 5 | 2 | 168.0 | 120.2 |
| 20KP112A | 112 | 125.10 | 5 | 2 | 182.0 | 111.0 |
| 20KP120A | 120 | 134.00 | 5 | 2 | 194.0 | 104.1 |
| 20KP132A | 132 | 147.40 | 5 | 2 | 213.0 | 94.8 |
| 20KP144A | 144 | 160.80 | 5 | 2 | 232.0 | 87.1 |
| 20KP160A | 160 | 178.70 | 5 | 2 | 258.0 | 78.3 |
| 20KP172A | 172 | 192.10 | 5 | 2 | 277.0 | 72.9 |
| 20KP180A | 180 | 201.10 | 5 | 2 | 291.0 | 69.4 |
| 20KP192A | 192 | 214.50 | 5 | 2 | 309.0 | 65.4 |
| 20KP204A | 204 | 227.90 | 5 | 2 | 329.0 | 61.4 |
| 20KP216A | 216 | 241.30 | 5 | 2 | 348.0 | 58.0 |
| 20KP232A | 232 | 86.70 | 5 | 2 | 374.0 | 54.0 |
| 20KP240A | 240 | 268.10 | 5 | 2 | 387.0 | 52.2 |
| 20KP256A | 256 | 286.00 | 5 | 2 | 412.0 | 49.0 |
| 20KP280A | 280 | 312.80 | 5 | 2 | 451.0 | 44.8 |
| 20KP300A | 300 | 335.10 | 5 | 2 | 483.0 | 41.8 |

* = Add "CA" suffix for bidirectional device types.

= See General Information for Impulse Current Waveform

30KP Series – 30000 Watt




30KP Series Features

- RoHS Compliance Standard
- 30000 watt peak pulse power dissipation
- Available in voltages from 28V to 288V
- Unidirectional and Bidirectional
- Glass passivated junction
- Low clamping factor
- Each device 100% surge tested
- Available in bulk or tape and reel (Reel quantity = 300 pieces)
- UL 497B Recognized, File # E135015
- Tape and Reel to EIA Standard RS-296-E


Absolute Maximum Ratings

| Parameter | Value |
|---|-----------------|
| Peak pulse power dissipation (PPPM) at 25°C | 30000W |
| Steady state power dissipation at lead temperature = 75°C (Lead length 3/8" min.) | 8W |
| Operating and storage temperatures | -55°C to +175°C |

Mechanical Dimensions

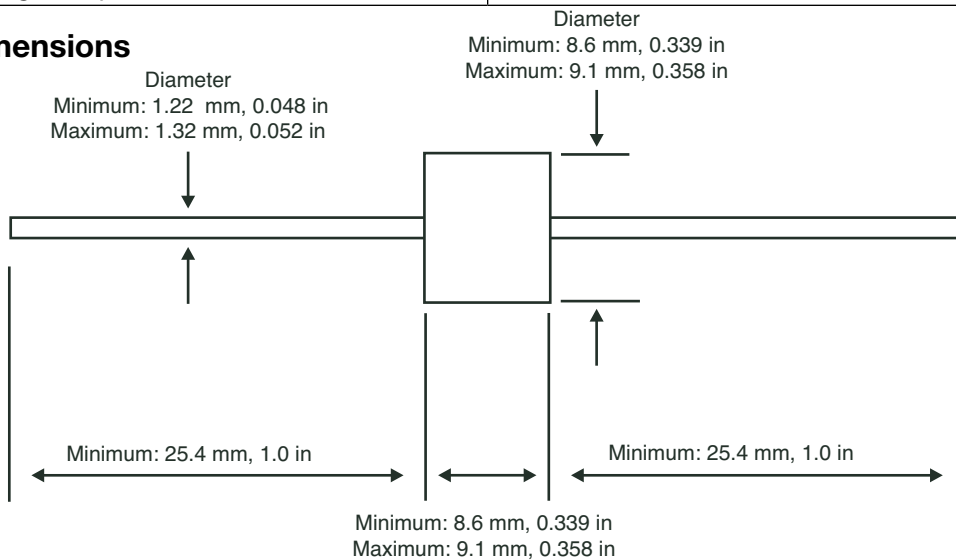

Standard Mounting Pad Layout

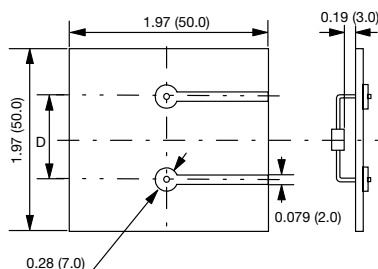

NOTE: Dimension D
 a.) 1.5KE (DO-201 Package) - 0.611 (15.5)
 b.) 3KP / 5KP / 15KP / 20KP / 30KP (R-6 Package) - 0.673 (17.1)

Hole Diameter
 a.) 0.059 (1.5)

All dimensions in inches and (millimeters)

30KP Series – 30000 Watt

Electrical Characteristics

| Part Number* | Rated Standoff Voltage V _{wm} | Breakdown Voltage | | Maximum Stand By Current @V _{wm} + I _d | 10/1000μs Maximum Clamping Voltage @I _{ppm} # V _c Max | 10/1000μs Rated Peak Impulse Current I _{ppm} # |
|--------------|---|-------------------------|-----------------|--|--|---|
| | | V _{br} (Volts) | @I _t | | | |
| | V _{wm} (Volts) | Min | (mA) | (μA) | (Volts) | (Amperes) |
| 30KP28A | 28 | 31.28 | 50 | 5000 | 50.0 | 606.0 |
| 30KP30A | 30 | 33.51 | 50 | 5000 | 55.2 | 548.9 |
| 30KP33A | 33 | 36.90 | 50 | 5000 | 58.5 | 517.9 |
| 30KP36A | 36 | 40.20 | 50 | 5000 | 61.8 | 490.3 |
| 30KP39A | 39 | 43.60 | 20 | 2000 | 67.2 | 450.9 |
| 30KP42A | 42 | 46.90 | 10 | 1000 | 72.0 | 420.8 |
| 30KP43A | 43 | 48.00 | 10 | 1000 | 73.0 | 415.1 |
| 30KP45A | 45 | 50.30 | 5 | 250 | 77.4 | 391.5 |
| 30KP48A | 48 | 53.60 | 5 | 150 | 81.6 | 371.3 |
| 30KP51A | 51 | 57.00 | 5 | 50 | 86.4 | 350.7 |
| 30KP54A | 54 | 60.30 | 5 | 20 | 91.4 | 331.5 |
| 30KP58A | 58 | 64.80 | 5 | 20 | 92.4 | 327.9 |
| 30KP60A | 60 | 67.00 | 5 | 15 | 102.0 | 297.1 |
| 30KP64A | 64 | 71.50 | 5 | 10 | 104.0 | 291.3 |
| 30KP66A | 66 | 73.70 | 5 | 2 | 107.0 | 283.2 |
| 30KP70A | 70 | 78.20 | 5 | 2 | 109.0 | 278.0 |
| 30KP71A | 71 | 79.30 | 5 | 2 | 111.5 | 271.7 |
| 30KP72A | 72 | 80.40 | 5 | 2 | 114.0 | 265.8 |
| 30KP75A | 75 | 83.80 | 5 | 2 | 119.4 | 253.8 |
| 30KP78A | 78 | 87.10 | 5 | 2 | 129.0 | 234.9 |
| 30KP84A | 84 | 93.80 | 5 | 2 | 139.2 | 217.7 |
| 30KP90A | 90 | 100.50 | 5 | 2 | 146.4 | 207.0 |
| 30KP96A | 96 | 107.20 | 5 | 2 | 156.0 | 194.2 |
| 30KP102A | 102 | 113.90 | 5 | 2 | 165.6 | 183.0 |
| 30KP108A | 108 | 120.60 | 5 | 2 | 175.2 | 172.9 |
| 30KP120A | 120 | 134.00 | 5 | 2 | 194.4 | 155.9 |
| 30KP132A | 132 | 147.40 | 5 | 2 | 213.0 | 142.3 |
| 30KP144A | 144 | 160.80 | 5 | 2 | 223.2 | 135.8 |
| 30KP150A | 150 | 167.60 | 5 | 2 | 233.4 | 129.8 |
| 30KP158A | 158 | 174.30 | 5 | 2 | 245.0 | 123.7 |
| 30KP160A | 160 | 178.70 | 5 | 2 | 252.6 | 120.0 |
| 30KP168A | 168 | 187.70 | 5 | 2 | 272.4 | 111.2 |
| 30KP170A | 170 | 189.90 | 5 | 2 | 275.0 | 110.2 |
| 30KP180A | 180 | 201.10 | 5 | 2 | 290.4 | 104.3 |
| 30KP198A | 198 | 221.20 | 5 | 2 | 319.8 | 94.7 |
| 30KP216A | 216 | 241.30 | 5 | 2 | 348.6 | 86.9 |
| 30KP240A | 240 | 268.10 | 5 | 2 | 387.0 | 78.3 |
| 30KP258A | 258 | 288.20 | 5 | 2 | 416.4 | 72.8 |
| 30KP260A | 260 | 290.40 | 5 | 2 | 416.0 | 72.8 |
| 30KP270A | 270 | 301.60 | 5 | 2 | 436.2 | 69.5 |
| 30KP280A | 280 | 312.80 | 5 | 2 | 464.0 | 65.3 |
| 30KP288A | 288 | 321.70 | 5 | 2 | 469.9 | 64.5 |

* = Add "CA" suffix for bidirectional device types.

= See General Information for Impulse Current Waveform

P4SMAJ Series – 400 Watt Surface Mount



P4SMAJ Series Features

- RoHS Compliance Standard
- 400 watt peak pulse power dissipation
- Available in voltages from 5.0V to 188V
- Unidirectional and bidirectional
- Glass passivated junction
- Low clamping factor
- Available in tape and reel (Reel quantity = 5,000 pieces)
- Each device 100% surge tested
- Tape and Reel to EIA Standard RS-481-A
- UL 497B Recognized, File #E135015 (except for 188V, which is not recognized)


Absolute Maximum Ratings

| Parameter | Value |
|---|------------------|
| Peak pulse power dissipation (PPPM) at 25°C | 400W |
| Operating and storage temperatures | -55°C to + 150°C |


Mechanical Characteristics

- DO214AC package
- UL94V-0 Thermoset Epoxy
- Solder plated terminals
- Solderable per MIL-STD-750 Method 2026

Mechanical Dimensions

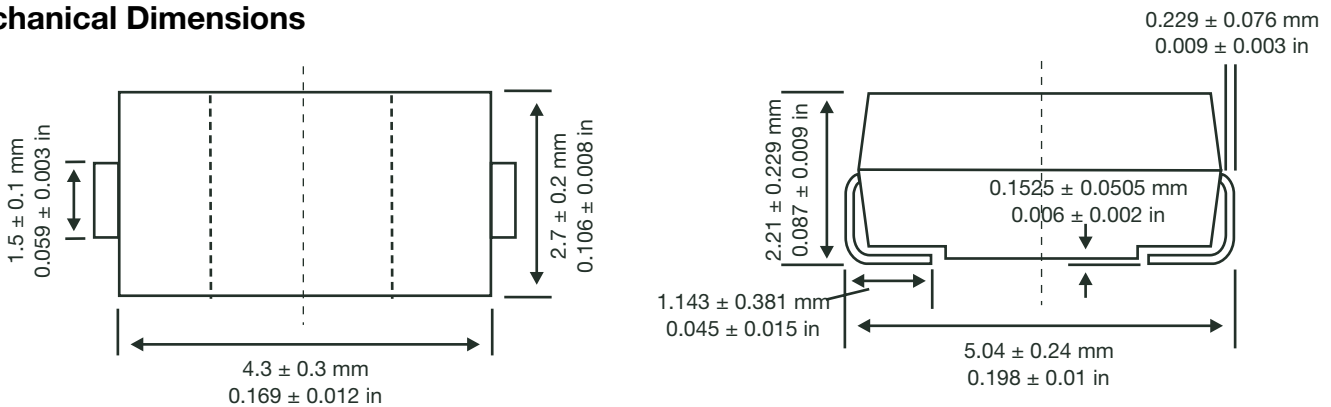

Standard Mounting Pad Layout



All dimensions in inches and (millimeters)

P4SMAJ Series – 400 Watt Surface Mount (continued)**Electrical Characteristics**

| Part Number* | Uni Part Marking | Bi Part Marking | Rated Standoff Voltage V _{wm} | Breakdown Voltage | | | Maximum Stand By Current @V _{WM} + I _d | 10/1000 μ s Maximum Clamping Voltage @I _{ppm} # V _c Max | 10/1000 μ s Rated Peak Impulse Current I _{ppm} # |
|--------------|------------------|-----------------|--|-------------------------|------|-----------------|--|---|---|
| | | | | V _{br} (Volts) | | @I _t | | | |
| | | | | (Volts) | Min | Max | | | |
| P4SMAJ5.0 | HD | TD | 5 | 6.4 | 7.3 | 10 | 800 | 9.6 | 41.6 |
| P4SMAJ5.0A | HE | TE | 5 | 6.4 | 7 | 10 | 800 | 9.2 | 43.5 |
| P4SMAJ6.0 | HF | TF | 6 | 6.67 | 8.15 | 10 | 800 | 11.4 | 35.1 |
| P4SMAJ6.0A | HG | TG | 6 | 6.67 | 7.37 | 10 | 800 | 10.3 | 38.8 |
| P4SMAJ6.5 | HH | TH | 6.5 | 7.22 | 8.82 | 10 | 500 | 12.3 | 32.5 |
| P4SMAJ6.5A | HK | TK | 6.5 | 7.22 | 7.98 | 10 | 500 | 11.2 | 35.7 |
| P4SMAJ7.0 | HL | TL | 7 | 7.78 | 9.51 | 10 | 200 | 13.3 | 30.1 |
| P4SMAJ7.0A | HM | TM | 7 | 7.78 | 8.6 | 10 | 200 | 12 | 33.3 |
| P4SMAJ7.5 | HN | TN | 7.5 | 8.33 | 10.3 | 1 | 100 | 14.3 | 28 |
| P4SMAJ7.5A | HP | TP | 7.5 | 8.33 | 9.21 | 1 | 100 | 12.9 | 31 |
| P4SMAJ8.0 | HQ | TQ | 8 | 8.89 | 10.9 | 1 | 50 | 15 | 26.5 |
| P4SMAJ8.0A | HR | TR | 8 | 8.89 | 9.83 | 1 | 50 | 13.6 | 29.4 |
| P4SMAJ8.5 | HS | TS | 8.5 | 9.44 | 11.5 | 1 | 10 | 15.9 | 25.1 |
| P4SMAJ8.5A | HT | TT | 8.5 | 9.44 | 10.4 | 1 | 10 | 14.4 | 27.7 |
| P4SMAJ9.0 | HU | TU | 9 | 10 | 12.2 | 1 | 5 | 16.9 | 23.6 |
| P4SMAJ9.0A | HV | TV | 9 | 10 | 11.1 | 1 | 5 | 15.4 | 26 |
| P4SMAJ10 | HW | TW | 10 | 11.1 | 13.6 | 1 | 5 | 18.8 | 21.2 |
| P4SMAJ10A | HX | TX | 10 | 11.1 | 12.3 | 1 | 5 | 17 | 23.5 |
| P4SMAJ11 | HY | TY | 11 | 12.2 | 14.9 | 1 | 5 | 20.1 | 20 |
| P4SMAJ11A | HZ | TZ | 11 | 12.2 | 13.5 | 1 | 5 | 18.2 | 22 |
| P4SMAJ12 | ID | UD | 12 | 13.3 | 16.3 | 1 | 5 | 22 | 18.1 |
| P4SMAJ12A | IE | UE | 12 | 13.3 | 14.7 | 1 | 5 | 19.9 | 20.1 |
| P4SMAJ13 | IF | UF | 13 | 14.4 | 17.6 | 1 | 5 | 23.8 | 16.8 |
| P4SMAJ13A | IG | UG | 13 | 14.4 | 15.9 | 1 | 5 | 21.5 | 18.6 |
| P4SMAJ14 | IH | UH | 14 | 15.6 | 19.1 | 1 | 5 | 25.8 | 15.5 |
| P4SMAJ14A | IK | UK | 14 | 15.6 | 17.2 | 1 | 5 | 23.2 | 17.2 |

* = Add "C" or "CA" suffix for bidirectional device types.

+ = For Bidirectional Types Having V_{WM} <= 10V, their I_D limit is doubled.

= See General Information for Impulse Current Waveform.

P4SMAJ Series – 400 Watt Surface Mount (continued)**Electrical Characteristics (continued)**

| Part Number* | Uni Part Marking | Bi Part Marking | Rated Standoff Voltage V _{wm} | Breakdown Voltage | | | Maximum Stand By Current @V _{WM} + I _d | 10/1000 μ s Maximum Clamping Voltage @I _{ppm} # V _c Max | 10/1000 μ s Rated Peak Impulse Current I _{ppm} # |
|--------------|------------------|-----------------|--|-------------------------|------|-----------------|--|---|---|
| | | | | V _{br} (Volts) | | @I _t | | | |
| | | | | (Volts) | Min | Max | | | |
| P4SMAJ15 | IL | UL | 15 | 16.7 | 20.4 | 1 | 5 | 26.9 | 14.8 |
| P4SMAJ15A | IM | UM | 15 | 16.7 | 18.5 | 1 | 5 | 24.4 | 16.4 |
| P4SMAJ16 | IN | UN | 16 | 17.8 | 21.8 | 1 | 5 | 28.8 | 13.8 |
| P4SMAJ16A | IP | UP | 16 | 17.8 | 19.7 | 1 | 5 | 26 | 15.3 |
| P4SMAJ17 | IQ | UQ | 17 | 18.9 | 23.1 | 1 | 5 | 30.5 | 13.1 |
| P4SMAJ17A | IR | UR | 17 | 18.9 | 20.9 | 1 | 5 | 27.6 | 14.5 |
| P4SMAJ18 | IS | US | 18 | 20 | 24.4 | 1 | 5 | 32.2 | 12.4 |
| P4SMAJ18A | IT | UT | 18 | 20 | 22.1 | 1 | 5 | 29.2 | 13.7 |
| P4SMAJ20 | IU | UU | 20 | 22.2 | 27.1 | 1 | 5 | 35.8 | 11.1 |
| P4SMAJ20A | IV | UV | 20 | 22.2 | 24.5 | 1 | 5 | 32.4 | 12.3 |
| P4SMAJ22 | IW | UW | 22 | 24.4 | 29.8 | 1 | 5 | 39.4 | 10.1 |
| P4SMAJ22A | IX | UX | 22 | 24.4 | 26.9 | 1 | 5 | 35.5 | 11.2 |
| P4SMAJ24 | IY | UY | 24 | 26.7 | 32.6 | 1 | 5 | 43 | 9.3 |
| P4SMAJ24A | IZ | UZ | 24 | 26.7 | 29.5 | 1 | 5 | 38.9 | 10.3 |
| P4SMAJ26 | JD | VD | 26 | 28.9 | 35.3 | 1 | 5 | 46.6 | 8.6 |
| P4SMAJ26A | JE | VE | 26 | 28.9 | 31.9 | 1 | 5 | 42.1 | 9.5 |
| P4SMAJ28 | JF | VF | 28 | 31.1 | 38 | 1 | 5 | 50 | 8 |
| P4SMAJ28A | JG | VG | 28 | 31.1 | 34.4 | 1 | 5 | 45.4 | 8.8 |
| P4SMAJ30 | JH | VH | 30 | 33.3 | 40.7 | 1 | 5 | 53.5 | 7.5 |
| P4SMAJ30A | JK | VK | 30 | 33.3 | 36.8 | 1 | 5 | 48.4 | 8.3 |
| P4SMAJ33 | JL | VL | 33 | 36.7 | 44.9 | 1 | 5 | 59 | 6.8 |
| P4SMAJ33A | JM | VM | 33 | 36.7 | 40.6 | 1 | 5 | 53.3 | 7.5 |
| P4SMAJ36 | JN | VN | 36 | 40 | 48.9 | 1 | 5 | 64.3 | 6.2 |
| P4SMAJ36A | JP | VP | 36 | 40 | 44.2 | 1 | 5 | 58.1 | 6.9 |
| P4SMAJ40 | JQ | VQ | 40 | 44.4 | 54.3 | 1 | 5 | 71.4 | 5.6 |
| P4SMAJ40A | JR | VR | 40 | 44.4 | 49.1 | 1 | 5 | 64.5 | 6.2 |

* = Add "C" or "CA" suffix for bidirectional device types.

+ = For Bidirectional Types Having V_{WM} <= 10V, their I_D limit is doubled.

= See General Information for Impulse Current Waveform.

P4SMAJ Series – 400 Watt Surface Mount (continued)**Electrical Characteristics (continued)**

| Part Number* | Uni Part Marking | Bi Part Marking | Rated Standoff Voltage V _{wm} | Breakdown Voltage | | | Maximum Stand By Current @V _{WM} + I _d | 10/1000 μ s Maximum Clamping Voltage @I _{ppm} # V _c Max | 10/1000 μ s Rated Peak Impulse Current I _{ppm} # |
|--------------|------------------|-----------------|--|-------------------------|------|-----------------|--|---|---|
| | | | | V _{br} (Volts) | | @I _t | | | |
| | | | | (Volts) | Min | Max | | | |
| P4SMAJ43 | JS | VS | 43 | 47.8 | 58.4 | 1 | 5 | 76.7 | 5.2 |
| P4SMAJ43A | JT | VT | 43 | 47.8 | 52.8 | 1 | 5 | 69.4 | 5.7 |
| P4SMAJ45 | JU | VU | 45 | 50 | 61.1 | 1 | 5 | 80.3 | 5.0 |
| P4SMAJ45A | JV | VV | 45 | 50 | 55.3 | 1 | 5 | 72.7 | 5.5 |
| P4SMAJ48 | JW | VW | 48 | 53.3 | 65.1 | 1 | 5 | 85.5 | 4.7 |
| P4SMAJ48A | JX | VX | 48 | 53.3 | 58.9 | 1 | 5 | 77.4 | 5.2 |
| P4SMAJ51 | JY | VY | 51 | 56.7 | 69.3 | 1 | 5 | 91.1 | 4.4 |
| P4SMAJ51A | JZ | VZ | 51 | 56.7 | 62.7 | 1 | 5 | 82.4 | 4.9 |
| P4SMAJ54 | RD | WD | 54 | 60 | 73.3 | 1 | 5 | 96.3 | 4.2 |
| P4SMAJ54A | RE | WE | 54 | 60 | 66.3 | 1 | 5 | 87.1 | 4.6 |
| P4SMAJ58 | RF | WF | 58 | 64.4 | 78.7 | 1 | 5 | 103 | 3.9 |
| P4SMAJ58A | RG | WG | 58 | 64.4 | 71.2 | 1 | 5 | 93.6 | 4.3 |
| P4SMAJ60 | RH | WH | 60 | 66.7 | 81.5 | 1 | 5 | 107 | 3.7 |
| P4SMAJ60A | RK | WK | 60 | 66.7 | 73.7 | 1 | 5 | 96.8 | 4.1 |
| P4SMAJ64 | RL | WL | 64 | 71.1 | 86.4 | 1 | 5 | 114 | 3.5 |
| P4SMAJ64A | RM | WM | 64 | 71.1 | 78.6 | 1 | 5 | 103 | 3.9 |
| P4SMAJ70 | RN | WN | 70 | 77.8 | 95.1 | 1 | 5 | 125 | 3.2 |
| P4SMAJ70A | RP | WP | 70 | 77.8 | 86 | 1 | 5 | 113 | 3.5 |
| P4SMAJ75 | RQ | WQ | 75 | 83.3 | 102 | 1 | 5 | 134 | 3.0 |
| P4SMAJ75A | RR | WR | 75 | 83.3 | 92.1 | 1 | 5 | 121 | 3.3 |
| P4SMAJ78 | RS | WS | 78 | 86.7 | 106 | 1 | 5 | 139 | 2.9 |
| P4SMAJ78A | RT | WT | 78 | 86.7 | 95.8 | 1 | 5 | 126 | 2.2 |
| P4SMAJ85 | RU | WU | 85 | 94.4 | 115 | 1 | 5 | 151 | 2.6 |
| P4SMAJ85A | RV | WV | 85 | 94.4 | 104 | 1 | 5 | 137 | 2.9 |
| P4SMAJ90 | RW | WW | 90 | 100 | 122 | 1 | 5 | 160 | 2.5 |
| P4SMAJ90A | RX | WX | 90 | 100 | 111 | 1 | 5 | 146 | 2.7 |

* = Add "C" or "CA" suffix for bidirectional device types.

+ = For Bidirectional Types Having V_{WM} <= 10V, their I_D limit is doubled.

= See General Information for Impulse Current Waveform.

P4SMAJ Series – 400 Watt Surface Mount (continued)**Electrical Characteristics (continued)**

| Part Number* | Uni Part Marking | Bi Part Marking | Rated Standoff Voltage VWM | Breakdown Voltage | | | Maximum Stand By Current @VWM+ ID | 10/1000 μ s Maximum Clamping Voltage @IPPM# Vc Max | 10/1000 μ s Rated Peak Impulse Current IPPM# |
|--------------|------------------|-----------------|----------------------------|-------------------|-----|-----|-----------------------------------|--|--|
| | | | | Vbr (Volts) | | @IT | | | |
| | | | | (Volts) | Min | Max | | | |
| P4SMAJ100 | RY | WY | 100 | 111 | 136 | 1 | 5 | 179 | 2.2 |
| P4SMAJ100A | RZ | WZ | 100 | 111 | 123 | 1 | 5 | 162 | 2.5 |
| P4SMAJ110 | SD | XD | 110 | 122 | 149 | 1 | 5 | 196 | 2 |
| P4SMAJ110A | SE | XE | 110 | 122 | 135 | 1 | 5 | 177 | 2.3 |
| P4SMAJ120 | SF | XF | 120 | 133 | 163 | 1 | 5 | 214 | 1.9 |
| P4SMAJ120A | SG | XG | 120 | 133 | 147 | 1 | 5 | 193 | 2 |
| P4SMAJ130 | SH | XH | 130 | 144 | 176 | 1 | 5 | 231 | 1.7 |
| P4SMAJ130A | SK | XK | 130 | 144 | 159 | 1 | 5 | 209 | 1.9 |
| P4SMAJ150 | SL | XL | 150 | 167 | 204 | 1 | 5 | 268 | 1.5 |
| P4SMAJ150A | SM | XM | 150 | 167 | 185 | 1 | 5 | 243 | 1.6 |
| P4SMAJ160 | SN | XN | 160 | 178 | 218 | 1 | 5 | 287 | 1.4 |
| P4SMAJ160A | SP | XP | 160 | 178 | 197 | 1 | 5 | 259 | 1.5 |
| P4SMAJ170 | SQ | XQ | 170 | 189 | 231 | 1 | 5 | 304 | 1.3 |
| P4SMAJ170A | SR | XR | 170 | 189 | 209 | 1 | 5 | 275 | 1.4 |
| P4SMAJ188A | SS | VS | 188 | 209 | 231 | 1 | 5 | 328 | 1.2 |

* = Add "C" or "CA" suffix for bidirectional device types.

+ = For Bidirectional Types Having VWM \leq 10V, their ID limit is doubled.

= See General Information for Impulse Current Waveform.



P6SMBJ Series – 600 Watt Surface Mount



P6SMBJ Series Features

- RoHS Compliance Standard
- 600 watt peak pulse power dissipation
- Available in voltages from 5.0V to 170V
- Unidirectional and bidirectional
- Glass passivated junction
- Low clamping factor
- Available in tape and reel (Reel quantity = 3,000 pieces)
- Each device 100% surge tested
- Tape and Reel to EIA Standard RS-481-A
- UL 497B Recognized, File # E135015 (5.0V - 75V)


Absolute Maximum Ratings

| Parameter | Value |
|---|------------------|
| Peak pulse power dissipation (PPPM) at 25°C | 600W |
| Steady state power dissipation at 25°C | 5W |
| Operating and storage temperatures | -55°C to + 150°C |


Mechanical Characteristics

- DO214AA package
- UL94V-0 Thermoset Epoxy
- Solder plated terminals
- Solderable per MIL-STD-750 Method 2026

Mechanical Dimensions

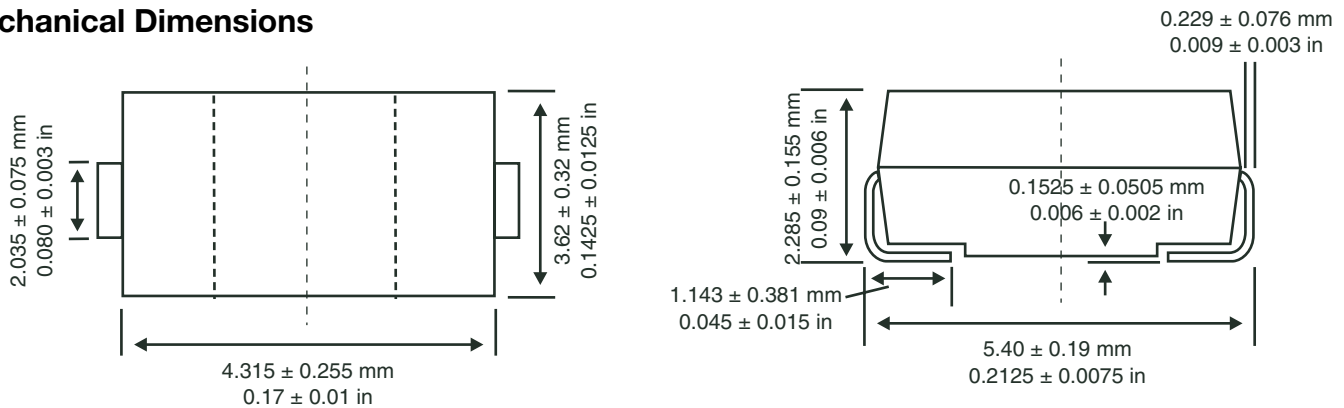

Standard Mounting Pad Layout



All dimensions in inches and (millimeters)

P6SMBJ Series – 600 Watt Surface Mount (continued)**Electrical Characteristics**

| Part Number* | Uni Part Marking | Bi Part Marking | Rated Standoff Voltage V _{wm} | Breakdown Voltage | | | Maximum Stand By Current @V _{WM} + I _d | 10/1000 μ s Maximum Clamping Voltage @I _{ppm} # V _c Max | 10/1000 μ s Rated Peak Impulse Current I _{ppm} # |
|--------------|------------------|-----------------|--|-------------------------|-------|-----------------|--|---|---|
| | | | | V _{br} (Volts) | | @I _t | | | |
| | | | | (Volts) | Min | Max | | | |
| P6SMBJ5.0 | KD | AD | 5 | 6.4 | 7.55 | 10 | 800 | 9.6 | 62.5 |
| P6SMBJ5.0A | KE | AE | 5 | 6.4 | 7.25 | 10 | 800 | 9.2 | 65.2 |
| P6SMBJ6.0 | KF | AF | 6 | 6.67 | 8.45 | 10 | 800 | 11.4 | 52.6 |
| P6SMBJ6.0A | KG | AG | 6 | 6.67 | 7.65 | 10 | 800 | 10.3 | 58.3 |
| P6SMBJ6.5 | KH | AH | 6.5 | 7.22 | 9.14 | 10 | 500 | 12.3 | 48.7 |
| P6SMBJ6.5A | KK | AK | 6.5 | 7.22 | 8.3 | 10 | 500 | 11.2 | 53.6 |
| P6SMBJ7.0 | KL | AL | 7 | 7.78 | 9.86 | 10 | 200 | 13.3 | 45.1 |
| P6SMBJ7.0A | KM | AM | 7 | 7.78 | 8.95 | 10 | 200 | 12 | 50 |
| P6SMBJ7.5 | KN | AN | 7.5 | 8.33 | 10.8 | 1 | 100 | 14.3 | 42 |
| P6SMBJ7.5A | KP | AP | 7.5 | 8.33 | 9.58 | 1 | 100 | 12.9 | 46.5 |
| P6SMBJ8.0 | KQ | AQ | 8 | 8.89 | 11.3 | 1 | 50 | 15 | 40 |
| P6SMBJ8.0A | KR | AR | 8 | 8.89 | 10.2 | 1 | 50 | 13.6 | 44.1 |
| P6SMBJ8.5 | KS | AS | 8.5 | 9.44 | 11.9 | 1 | 20 | 15.9 | 37.7 |
| P6SMBJ8.5A | KT | AT | 8.5 | 9.44 | 10.8 | 1 | 20 | 14.4 | 41.7 |
| P6SMBJ9.0 | KU | AU | 9 | 10 | 12.8 | 1 | 10 | 16.9 | 35.5 |
| P6SMBJ9.0A | KV | AV | 9 | 10 | 11.5 | 1 | 10 | 15.4 | 39 |
| P6SMBJ10 | KW | AW | 10 | 11.1 | 14.1 | 1 | 5 | 18.8 | 31.9 |
| P6SMBJ10A | KX | AX | 10 | 11.1 | 12.8 | 1 | 5 | 17 | 35.3 |
| P6SMBJ11 | KY | AY | 11 | 12.2 | 15.4 | 1 | 5 | 20.1 | 29.9 |
| P6SMBJ11A | KZ | AZ | 11 | 12.2 | 14.4 | 1 | 5 | 18.2 | 33 |
| P6SMBJ12 | LD | BD | 12 | 13.3 | 16.9 | 1 | 5 | 22 | 27.3 |
| P6SMBJ12A | LE | BE | 12 | 13.3 | 15.3 | 1 | 5 | 19.9 | 30.2 |
| P6SMBJ13 | LF | BF | 13 | 14.4 | 18.2 | 1 | 5 | 23.8 | 25.2 |
| P6SMBJ13A | LG | BG | 13 | 14.4 | 16.15 | 1 | 5 | 21.5 | 27.9 |
| P6SMBJ14 | LH | BH | 14 | 15.6 | 19.8 | 1 | 5 | 25.8 | 23.3 |
| P6SMBJ14A | LK | BK | 14 | 15.6 | 17.9 | 1 | 5 | 23.2 | 25.8 |

* = Add "C" or "CA" suffix for bidirectional device types.

+ = For Bidirectional Types Having V_{WM} <= 10V, their I_D limit is doubled.

= See General Information for Impulse Current Waveform.

P6SMBJ Series – 600 Watt Surface Mount (continued)**Electrical Characteristics (continued)**

| Part Number* | Uni Part Marking | Bi Part Marking | Rated Standoff Voltage V _{wm} | Breakdown Voltage | | | Maximum Stand By Current @V _{WM} + I _d | 10/1000 μ s Maximum Clamping Voltage @I _{ppm} # V _c Max | 10/1000 μ s Rated Peak Impulse Current I _{ppm} # |
|--------------|------------------|-----------------|--|-------------------------|------|-----------------|--|---|---|
| | | | | V _{br} (Volts) | | @I _t | | | |
| | | | | (Volts) | Min | Max | | | |
| P6SMBJ15 | LL | BL | 15 | 16.7 | 21.1 | 1 | 5 | 26.9 | 22.3 |
| P6SMBJ15A | LM | BM | 15 | 16.7 | 19.2 | 1 | 5 | 24.4 | 24 |
| P6SMBJ16 | LN | BN | 16 | 17.8 | 22.6 | 1 | 5 | 28.8 | 20.8 |
| P6SMBJ16A | LP | BP | 16 | 17.8 | 20.5 | 1 | 5 | 26 | 23.1 |
| P6SMBJ17 | LQ | BQ | 17 | 18.9 | 23.9 | 1 | 5 | 30.5 | 19.7 |
| P6SMBJ17A | LR | BR | 17 | 18.9 | 21.7 | 1 | 5 | 27.6 | 21.7 |
| P6SMBJ18 | LS | BS | 18 | 20 | 25.3 | 1 | 5 | 32.2 | 18.6 |
| P6SMBJ18A | LT | BT | 18 | 20 | 23.3 | 1 | 5 | 29.2 | 20.5 |
| P6SMBJ20 | LU | BU | 20 | 22.2 | 28.1 | 1 | 5 | 35.8 | 16.7 |
| P6SMBJ20A | LV | BV | 20 | 22.2 | 25.5 | 1 | 5 | 32.4 | 18.5 |
| P6SMBJ22 | LW | BW | 22 | 24.4 | 30.9 | 1 | 5 | 39.4 | 15.2 |
| P6SMBJ22A | LX | BX | 22 | 24.4 | 28 | 1 | 5 | 35.5 | 16.9 |
| P6SMBJ24 | LY | BY | 24 | 26.7 | 33.8 | 1 | 5 | 43 | 14 |
| P6SMBJ24A | LZ | BZ | 24 | 26.7 | 30.7 | 1 | 5 | 38.9 | 15.4 |
| P6SMBJ26 | MD | CD | 26 | 28.9 | 36.8 | 1 | 5 | 46.6 | 12.4 |
| P6SMBJ26A | ME | CE | 26 | 28.9 | 32.2 | 1 | 5 | 42.1 | 14.2 |
| P6SMBJ28 | MF | CF | 28 | 31.1 | 39.4 | 1 | 5 | 50 | 12 |
| P6SMBJ28A | MG | CG | 28 | 31.1 | 35.8 | 1 | 5 | 45.4 | 13.2 |
| P6SMBJ30 | MH | CH | 30 | 33.3 | 42.4 | 1 | 5 | 53.5 | 11.2 |
| P6SMBJ30A | MK | CK | 30 | 33.3 | 38.3 | 1 | 5 | 46.6 | 12.4 |
| P6SMBJ33 | ML | CL | 33 | 36.7 | 46.9 | 1 | 5 | 59 | 10.2 |
| P6SMBJ33A | MM | CM | 33 | 36.7 | 42.2 | 1 | 5 | 53.3 | 11.3 |
| P6SMBJ36 | MN | CN | 36 | 40 | 50.7 | 1 | 5 | 64.3 | 9.3 |
| P6SMBJ36A | MP | CP | 36 | 40 | 46 | 1 | 5 | 58.1 | 10.3 |
| P6SMBJ40 | MQ | CQ | 40 | 44.4 | 56.3 | 1 | 5 | 71.4 | 8.4 |
| P6SMBJ40A | MR | CR | 40 | 44.4 | 51.1 | 1 | 5 | 64.5 | 9.3 |

* = Add "C" or "CA" suffix for bidirectional device types.

+ = For Bidirectional Types Having V_{WM} <= 10V, their I_D limit is doubled.

= See General Information for Impulse Current Waveform.

P6SMBJ Series – 600 Watt Surface Mount (continued)**Electrical Characteristics (continued)**

| Part Number* | Uni Part Marking | Bi Part Marking | Rated Standoff Voltage V _{wm} | Breakdown Voltage | | | Maximum Stand By Current @V _{WM} + I _d | 10/1000 μ s Maximum Clamping Voltage @I _{ppm} # V _c Max | 10/1000 μ s Rated Peak Impulse Current I _{ppm} # |
|--------------|------------------|-----------------|--|-------------------------|-------|-----------------|--|---|---|
| | | | | V _{br} (Volts) | | @I _t | | | |
| | | | | (Volts) | Min | Max | | | |
| P6SMBJ43 | MS | CS | 43 | 47.8 | 60.5 | 1 | 5 | 76.7 | 7.8 |
| P6SMBJ43A | MT | CT | 43 | 47.8 | 54.9 | 1 | 5 | 69.4 | 8.6 |
| P6SMBJ45 | MU | CU | 45 | 50 | 63.3 | 1 | 5 | 80.3 | 7.5 |
| P6SMBJ45A | MV | CV | 45 | 50 | 57.5 | 1 | 5 | 72.7 | 8.3 |
| P6SMBJ48 | MW | CW | 48 | 53.3 | 67.5 | 1 | 5 | 85.5 | 7 |
| P6SMBJ48A | MX | CX | 48 | 53.3 | 61.3 | 1 | 5 | 77.4 | 7.7 |
| P6SMBJ51 | MY | CY | 51 | 56.7 | 71.8 | 1 | 5 | 91.1 | 6.6 |
| P6SMBJ51A | MZ | CZ | 51 | 56.7 | 65.2 | 1 | 5 | 82.4 | 7.3 |
| P6SMBJ54 | ND | DD | 54 | 60 | 76 | 1 | 5 | 96.3 | 6.2 |
| P6SMBJ54A | NE | DE | 54 | 60 | 69 | 1 | 5 | 87.1 | 6.9 |
| P6SMBJ58 | NF | DF | 58 | 64.4 | 81.6 | 1 | 5 | 103 | 5.8 |
| P6SMBJ58A | NG | DG | 58 | 64.4 | 74.6 | 1 | 5 | 93.6 | 6.4 |
| P6SMBJ60 | NH | DH | 60 | 66.7 | 84.5 | 1 | 5 | 107 | 5.6 |
| P6SMBJ60A | NK | DK | 60 | 66.7 | 76.6 | 1 | 5 | 96.8 | 6.2 |
| P6SMBJ64 | NL | DL | 64 | 71.1 | 90.1 | 1 | 5 | 114 | 5.3 |
| P6SMBJ64A | NM | DM | 64 | 71.1 | 81.8 | 1 | 5 | 103 | 5.8 |
| P6SMBJ70 | NN | DN | 70 | 77.8 | 98.6 | 1 | 5 | 125 | 4.8 |
| P6SMBJ70A | NP | DP | 70 | 77.8 | 89.5 | 1 | 5 | 113 | 5.3 |
| P6SMBJ75 | NQ | DQ | 75 | 83.3 | 106 | 1 | 5 | 134 | 4.5 |
| P6SMBJ75A | NR | DR | 75 | 83.3 | 95.8 | 1 | 5 | 121 | 4.9 |
| P6SMBJ78 | NS | DS | 78 | 86.7 | 110 | 1 | 5 | 139 | 4.3 |
| P6SMBJ78A | NT | DT | 78 | 86.7 | 99.7 | 1 | 5 | 126 | 4.7 |
| P6SMBJ85 | NU | DU | 85 | 94.4 | 119.2 | 1 | 5 | 151 | 3.9 |
| P6SMBJ85A | NV | DV | 85 | 94.4 | 108.2 | 1 | 5 | 137 | 4.4 |
| P6SMBJ90 | NW | DW | 90 | 100 | 126.5 | 1 | 5 | 160 | 3.8 |
| P6SMBJ90A | NX | DX | 90 | 100 | 115.5 | 1 | 5 | 146 | 4.1 |

* = Add "C" or "CA" suffix for bidirectional device types.

+ = For Bidirectional Types Having V_{WM} <= 10V, their I_D limit is doubled.

= See General Information for Impulse Current Waveform.

P6SMBJ Series – 600 Watt Surface Mount (continued)**Electrical Characteristics (continued)**

| Part Number* | Uni Part Marking | Bi Part Marking | Rated Standoff Voltage V _{wm} | Breakdown Voltage | | | Maximum Stand By Current @V _{WM} + I _d | 10/1000 μ s Maximum Clamping Voltage @I _{ppm} # V _c Max | 10/1000 μ s Rated Peak Impulse Current I _{ppm} # |
|--------------|------------------|-----------------|--|-------------------------|-------|-----------------|--|---|---|
| | | | | V _{br} (Volts) | | @I _t | | | |
| | | | | (Volts) | Min | Max | | | |
| P6SMBJ100 | NY | DY | 100 | 111 | 141 | 1 | 5 | 179 | 3.4 |
| P6SMBJ100A | NZ | DZ | 100 | 111 | 128 | 1 | 5 | 162 | 3.7 |
| P6SMBJ110 | PD | ED | 110 | 122 | 154 | 1 | 5 | 196 | 3 |
| P6SMBJ110A | PE | EE | 110 | 122 | 140 | 1 | 5 | 177 | 3.4 |
| P6SMBJ120 | PF | EF | 120 | 133 | 169 | 1 | 5 | 214 | 2.8 |
| P6SMBJ120A | PG | EG | 120 | 133 | 153 | 1 | 5 | 193 | 3.1 |
| P6SMBJ130 | PH | EH | 130 | 144 | 182 | 1 | 5 | 231 | 2.6 |
| P6SMBJ130A | PK | EK | 130 | 144 | 165 | 1 | 5 | 209 | 2.9 |
| P6SMBJ150 | PL | EL | 150 | 167 | 211.5 | 1 | 5 | 268 | 2.2 |
| P6SMBJ150A | PM | EM | 150 | 167 | 192 | 1 | 5 | 243 | 2.5 |
| P6SMBJ160 | PN | EN | 160 | 178 | 226 | 1 | 5 | 287 | 2.1 |
| P6SMBJ160A | PP | EP | 160 | 178 | 205 | 1 | 5 | 259 | 2.3 |
| P6SMBJ170 | PQ | EQ | 170 | 189 | 239.5 | 1 | 5 | 304 | 2 |
| P6SMBJ170A | PR | ER | 170 | 189 | 217.5 | 1 | 5 | 275 | 2.2 |

* = Add "C" or "CA" suffix for bidirectional device types.

+ = For Bidirectional Types Having V_{WM} <= 10V, their I_D limit is doubled.

= See General Information for Impulse Current Waveform.



1.5SMCJ Series – 1500 Watt Surface Mount



1.5SMCJ Series Features

- RoHS Compliance Standard
- 1500 watt peak pulse power dissipation
- Available in voltages from 5.0V to 170V
- Unidirectional and bidirectional
- Glass passivated junction
- Low clamping factor
- Available in tape and reel (Reel quantity = 3,000 pieces)
- Each device 100% surge tested
- UL 497B Recognized, File # E135015
- Tape and Reel to EIA Standard RS-481-A


Absolute Maximum Ratings

| Parameter | Value |
|---|------------------|
| Peak pulse power dissipation (PPPM) at 25°C | 1500W |
| Operating and storage temperatures | -55°C to + 150°C |


Mechanical Characteristics

- DO214AB package
- UL94V-0 Thermoset Epoxy
- Solder plated terminals
- Solderable per MIL-STD-750 Method 2026

Mechanical Dimensions

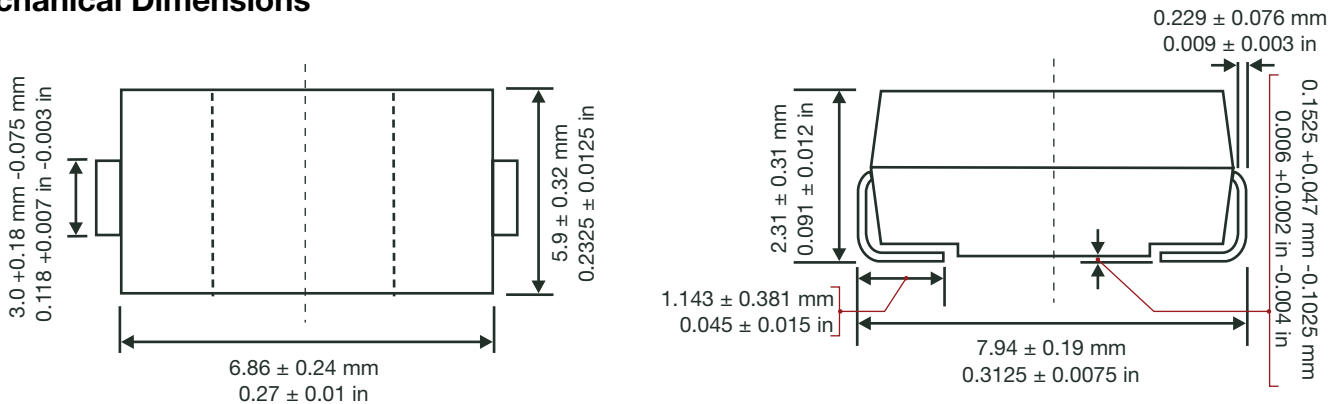

Standard Mounting Pad Layout



All dimensions in inches and (millimeters)

1.5SMCJ Series – 1500 Watt Surface Mount (continued)**Electrical Characteristics**

| Part Number* | Uni Part Marking | Bi Part Marking | Rated Standoff Voltage V _{wm} | Breakdown Voltage | | | Maximum Stand By Current @V _{WM} + I _d | 10/1000 μ s Maximum Clamping Voltage @I _{ppm} # V _c Max | 10/1000 μ s Rated Peak Impulse Current I _{ppm} # |
|--------------|------------------|-----------------|--|-------------------------|------|-----------------|--|---|---|
| | | | | V _{br} (Volts) | | @I _t | | | |
| | | | | (Volts) | Min | Max | | | |
| 1.5SMCJ5.0 | GDD | BDD | 5 | 6.4 | 7.55 | 10 | 1000 | 9.6 | 156.2 |
| 1.5SMCJ5.0A | GDE | BDE | 5 | 6.4 | 7.23 | 10 | 1000 | 9.2 | 163 |
| 1.5SMCJ6.0 | GDF | BDF | 6 | 6.67 | 8.45 | 10 | 1000 | 11.4 | 131.6 |
| 1.5SMCJ6.0A | GDG | BDG | 6 | 6.67 | 7.67 | 10 | 1000 | 10.3 | 145.6 |
| 1.5SMCJ6.5 | GDH | BDH | 6.5 | 7.22 | 9.14 | 10 | 500 | 12.3 | 122 |
| 1.5SMCJ6.5A | GDK | BDK | 6.5 | 7.22 | 8.3 | 10 | 500 | 11.2 | 133.9 |
| 1.5SMCJ7.0 | GDL | BDL | 7 | 7.78 | 9.86 | 10 | 200 | 13.3 | 112.8 |
| 1.5SMCJ7.0A | GDM | BDM | 7 | 7.78 | 8.95 | 10 | 200 | 12 | 125 |
| 1.5SMCJ7.5 | GDN | BDN | 7.5 | 8.33 | 10.8 | 1 | 100 | 14.3 | 104.9 |
| 1.5SMCJ7.5A | GDP | BDP | 7.5 | 8.33 | 9.58 | 1 | 100 | 12.9 | 116.3 |
| 1.5SMCJ8.0 | GDQ | BDQ | 8 | 8.89 | 11.3 | 1 | 50 | 15 | 100 |
| 1.5SMCJ8.0A | GDR | BDR | 8 | 8.89 | 10.2 | 1 | 50 | 13.6 | 110.3 |
| 1.5SMCJ8.5 | GDS | BDS | 8.5 | 9.44 | 11.9 | 1 | 25 | 15.9 | 94.3 |
| 1.5SMCJ8.5A | GDT | BDT | 8.5 | 9.44 | 10.8 | 1 | 20 | 14.4 | 104.2 |
| 1.5SMCJ9.0 | GDU | BDU | 9 | 10 | 12.8 | 1 | 10 | 16.9 | 88.7 |
| 1.5SMCJ9.0A | GDV | BDV | 9 | 10 | 11.5 | 1 | 10 | 15.4 | 97.4 |
| 1.5SMCJ10 | GDW | BDW | 10 | 11.1 | 14.1 | 1 | 5 | 18.8 | 79.8 |
| 1.5SMCJ10A | GDX | BDX | 10 | 11.1 | 12.8 | 1 | 5 | 17 | 88.2 |
| 1.5SMCJ11 | GDY | BDY | 11 | 12.2 | 15.4 | 1 | 5 | 20.1 | 74.6 |
| 1.5SMCJ11A | GDZ | BDZ | 11 | 12.2 | 14.4 | 1 | 5 | 18.2 | 82.4 |
| 1.5SMCJ12 | GED | BED | 12 | 13.3 | 16.9 | 1 | 5 | 22 | 68.2 |
| 1.5SMCJ12A | GEE | BEE | 12 | 13.3 | 15.3 | 1 | 5 | 19.9 | 75.3 |
| 1.5SMCJ13 | GEF | BEF | 13 | 14.4 | 18.2 | 1 | 5 | 23.8 | 63 |
| 1.5SMCJ13A | GEG | BEG | 13 | 14.4 | 16.5 | 1 | 5 | 21.5 | 69.7 |
| 1.5SMCJ14 | GEH | BEH | 14 | 15.6 | 19.8 | 1 | 5 | 25.8 | 58.1 |
| 1.5SMCJ14A | GEK | BEK | 14 | 15.6 | 17.9 | 1 | 5 | 23.2 | 64.7 |

* = Add "C" or "CA" suffix for bidirectional device types.

+ = For Bidirectional Types Having V_{WM} <= 10V, their I_D limit is doubled.

= See General Information for Impulse Current Waveform.

1.5SMCJ Series – 1500 Watt Surface Mount (continued)**Electrical Characteristics (continued)**

| Part Number* | Uni Part Marking | Bi Part Marking | Rated Standoff Voltage V _{wm} | Breakdown Voltage | | | Maximum Stand By Current @V _{WM} + I _d | 10/1000 μ s Maximum Clamping Voltage @I _{ppm} # V _c Max | 10/1000 μ s Rated Peak Impulse Current I _{ppm} # |
|--------------|------------------|-----------------|--|-------------------------|------|-----------------|--|---|---|
| | | | | V _{br} (Volts) | | @I _t | | | |
| | | | | (Volts) | Min | Max | | | |
| 1.5SMCJ15 | GEL | BEL | 15 | 16.7 | 21.1 | 1 | 5 | 26.9 | 55.8 |
| 1.5SMCJ15A | GEM | BEM | 15 | 16.7 | 19.2 | 1 | 5 | 24.4 | 61.5 |
| 1.5SMCJ16 | GEN | BEN | 16 | 17.8 | 22.6 | 1 | 5 | 28.8 | 52.1 |
| 1.5SMCJ16A | GEP | BEP | 16 | 17.8 | 20.5 | 1 | 5 | 26 | 57.7 |
| 1.5SMCJ17 | GEQ | BEQ | 17 | 18.9 | 23.9 | 1 | 5 | 30.5 | 49.2 |
| 1.5SMCJ17A | GER | BER | 17 | 18.9 | 21.7 | 1 | 5 | 27.6 | 53.3 |
| 1.5SMCJ18 | GES | BES | 18 | 20 | 25.3 | 1 | 5 | 32.2 | 46.6 |
| 1.5SMCJ18A | GET | BET | 18 | 20 | 23.3 | 1 | 5 | 29.2 | 51.4 |
| 1.5SMCJ20 | GEU | BEU | 20 | 22.2 | 28.1 | 1 | 5 | 35.8 | 41.9 |
| 1.5SMCJ20A | GEV | BEV | 20 | 22.2 | 25.5 | 1 | 5 | 32.4 | 46.3 |
| 1.5SMCJ22 | GEW | BEW | 22 | 24.4 | 30.9 | 1 | 5 | 39.4 | 38.1 |
| 1.5SMCJ22A | GEX | BEX | 22 | 24.4 | 28 | 1 | 5 | 35.5 | 42.2 |
| 1.5SMCJ24 | GEY | BEY | 24 | 26.7 | 33.8 | 1 | 5 | 43 | 34.9 |
| 1.5SMCJ24A | GEZ | BEZ | 24 | 26.7 | 30.7 | 1 | 5 | 38.9 | 38.6 |
| 1.5SMCJ26 | GFD | BFD | 26 | 28.9 | 36.8 | 1 | 5 | 46.6 | 32.2 |
| 1.5SMCJ26A | GFE | BFE | 26 | 28.9 | 32.2 | 1 | 5 | 42.1 | 35.6 |
| 1.5SMCJ28 | GFF | BFF | 28 | 31.1 | 39.4 | 1 | 5 | 50 | 30 |
| 1.5SMCJ28A | GFG | BFG | 28 | 31.1 | 35.8 | 1 | 5 | 45.4 | 33 |
| 1.5SMCJ30 | GFH | BFH | 30 | 33.3 | 42.4 | 1 | 5 | 53.5 | 28 |
| 1.5SMCJ30A | GFK | BFK | 30 | 33.3 | 38.3 | 1 | 5 | 48.4 | 31 |
| 1.5SMCJ33 | GFL | BFL | 33 | 36.7 | 46.9 | 1 | 5 | 59 | 25.2 |
| 1.5SMCJ33A | GFM | BFM | 33 | 36.7 | 42.2 | 1 | 5 | 53.3 | 28.1 |
| 1.5SMCJ36 | GFN | BFN | 36 | 40 | 50.7 | 1 | 5 | 64.3 | 23.3 |
| 1.5SMCJ36A | GFP | BFP | 36 | 40 | 46 | 1 | 5 | 58.1 | 25.8 |
| 1.5SMCJ40 | GFQ | BFQ | 40 | 44.4 | 56.3 | 1 | 5 | 71.4 | 21 |
| 1.5SMCJ40A | GFR | BFR | 40 | 44.4 | 51.1 | 1 | 5 | 64.5 | 23.2 |

* = Add "C" or "CA" suffix for bidirectional device types.

+ = For Bidirectional Types Having V_{WM} <= 10V, their I_D limit is doubled.

= See General Information for Impulse Current Waveform.

1.5SMCJ Series – 1500 Watt Surface Mount (continued)**Electrical Characteristics (continued)**

| Part Number* | Uni Part Marking | Bi Part Marking | Rated Standoff Voltage V _{wm} | Breakdown Voltage | | | Maximum Stand By Current @V _{WM} + I _d | 10/1000 μ s Maximum Clamping Voltage @I _{ppm} # V _c Max | 10/1000 μ s Rated Peak Impulse Current I _{ppm} # |
|--------------|------------------|-----------------|--|-------------------------|-------|-----------------|--|---|---|
| | | | | V _{br} (Volts) | | @I _t | | | |
| | | | | (Volts) | Min | Max | | | |
| 1.5SMCJ43 | GFS | BFS | 43 | 47.8 | 60.5 | 1 | 5 | 76.7 | 19.6 |
| 1.5SMCJ43A | GFT | BFT | 43 | 47.8 | 54.9 | 1 | 5 | 69.4 | 21.6 |
| 1.5SMCJ45 | GFU | BFU | 45 | 50 | 63.3 | 1 | 5 | 80.3 | 18.7 |
| 1.5SMCJ45A | GFV | BFV | 45 | 50 | 57.5 | 1 | 5 | 72.7 | 20.6 |
| 1.5SMCJ48 | GFW | BFW | 48 | 53.3 | 67.5 | 1 | 5 | 85.5 | 17.5 |
| 1.5SMCJ48A | GFX | BFX | 48 | 53.3 | 61.3 | 1 | 5 | 77.4 | 19.4 |
| 1.5SMCJ51 | GFY | BFY | 51 | 56.7 | 71.8 | 1 | 5 | 91.1 | 18.5 |
| 1.5SMCJ51A | GFZ | BFZ | 51 | 56.7 | 65.2 | 1 | 5 | 82.4 | 18.2 |
| 1.5SMCJ54 | GGD | BGD | 54 | 60 | 76 | 1 | 5 | 96.3 | 15.6 |
| 1.5SMCJ54A | GGE | BGE | 54 | 60 | 69 | 1 | 5 | 87.1 | 17.2 |
| 1.5SMCJ58 | GGF | BGF | 58 | 64.4 | 81.6 | 1 | 5 | 103 | 14.6 |
| 1.5SMCJ58A | GGG | BGG | 58 | 64.4 | 74.6 | 1 | 5 | 93.6 | 16 |
| 1.5SMCJ60 | GGH | BGH | 60 | 66.7 | 84.5 | 1 | 5 | 107 | 14 |
| 1.5SMCJ60A | GGK | BGK | 60 | 66.7 | 76.7 | 1 | 5 | 96.8 | 15.5 |
| 1.5SMCJ64 | GGL | BGL | 64 | 71.1 | 90.1 | 1 | 5 | 114 | 13.2 |
| 1.5SMCJ64A | GGM | BGM | 64 | 71.1 | 81.8 | 1 | 5 | 103 | 14.6 |
| 1.5SMCJ70 | GGN | BGN | 70 | 77.8 | 98.6 | 1 | 5 | 125 | 12 |
| 1.5SMCJ70A | GGP | BGP | 70 | 77.8 | 89.5 | 1 | 5 | 113 | 13.3 |
| 1.5SMCJ75 | GGQ | BGQ | 75 | 83.3 | 106 | 1 | 5 | 134 | 11.2 |
| 1.5SMCJ75A | GGR | BGR | 75 | 83.3 | 95.8 | 1 | 5 | 121 | 12.4 |
| 1.5SMCJ78 | GGS | BGS | 78 | 86.7 | 110 | 1 | 5 | 139 | 10.8 |
| 1.5SMCJ78A | GGT | BGT | 78 | 86.7 | 99.7 | 1 | 5 | 126 | 11.4 |
| 1.5SMCJ85 | GGU | BGU | 85 | 94.4 | 119.2 | 1 | 5 | 151 | 9.9 |
| 1.5SMCJ85A | GGV | BGV | 85 | 94.4 | 108.2 | 1 | 5 | 137 | 10.4 |
| 1.5SMCJ90 | GGW | BGW | 90 | 100 | 126.5 | 1 | 5 | 160 | 9.4 |
| 1.5SMCJ90A | GGX | BGX | 90 | 100 | 115.5 | 1 | 5 | 146 | 10.3 |

* = Add "C" or "CA" suffix for bidirectional device types.

+ = For Bidirectional Types Having V_{WM} <= 10V, their I_D limit is doubled.

= See General Information for Impulse Current Waveform.

1.5SMCJ Series – 1500 Watt Surface Mount (continued)**Electrical Characteristics (continued)**

| Part Number* | Uni Part Marking | Bi Part Marking | Rated Standoff Voltage V _{wm} | Breakdown Voltage | | | Maximum Stand By Current @V _{WM} + I _d | 10/1000µs Maximum Clamping Voltage @I _{ppm} # V _c Max | 10/1000µs Rated Peak Impulse Current I _{ppm} # |
|--------------|------------------|-----------------|--|-------------------------|-------|-----------------|--|---|---|
| | | | | V _{br} (Volts) | | @I _t | | | |
| | | | | (Volts) | Min | Max | | | |
| 1.5SMCJ100 | GGY | BGY | 100 | 111 | 141 | 1 | 5 | 179 | 8.4 |
| 1.5SMCJ100A | GGZ | BGZ | 100 | 111 | 128 | 1 | 5 | 162 | 9.3 |
| 1.5SMCJ110 | GHD | BHD | 110 | 122 | 154 | 1 | 5 | 196 | 7.7 |
| 1.5SMCJ110A | GHE | BHE | 110 | 122 | 140 | 1 | 5 | 177 | 8.4 |
| 1.5SMCJ120 | GHF | BHF | 120 | 133 | 169 | 1 | 5 | 214 | 7 |
| 1.5SMCJ120A | GHG | BHG | 120 | 133 | 153 | 1 | 5 | 193 | 7.9 |
| 1.5SMCJ130 | GHH | BHH | 130 | 144 | 182 | 1 | 5 | 231 | 6.5 |
| 1.5SMCJ130A | GHK | BHK | 130 | 144 | 165 | 1 | 5 | 209 | 7.2 |
| 1.5SMCJ150 | GHL | BHL | 150 | 167 | 211.5 | 1 | 5 | 268 | 5.6 |
| 1.5SMCJ150A | GHM | BHM | 150 | 167 | 192 | 1 | 5 | 243 | 6.2 |
| 1.5SMCJ160 | GHN | BHN | 160 | 178 | 226 | 1 | 5 | 287 | 5.2 |
| 1.5SMCJ160A | GHP | BHP | 160 | 178 | 205 | 1 | 5 | 259 | 5.8 |
| 1.5SMCJ170 | GHQ | BHQ | 170 | 189 | 239.5 | 1 | 5 | 304 | 4.9 |
| 1.5SMCJ170A | GHR | BHR | 170 | 189 | 217.5 | 1 | 5 | 275 | 5.5 |

* = Add "C" or "CA" suffix for bidirectional device types.

+ = For Bidirectional Types Having V_{WM} <= 10V, their I_D limit is doubled.

= See General Information for Impulse Current Waveform.



3.0SMCJ Series – 3000 Watt Surface Mount



3.0SMCJ Series Features

- RoHS Compliance Standard
- 3000 watt peak pulse power dissipation
- Available in voltages from 5.0V to 170V
- Unidirectional and bidirectional
- Glass passivated junction
- Low clamping factor
- Available in tape and reel (Reel quantity = 3,000 pieces)
- Each device 100% surge tested
- UL 497B Recognized, File # E135015
- Tape and Reel to EIA Standard RS-481-A


Absolute Maximum Ratings

| Parameter | Value |
|---|------------------|
| Peak pulse power dissipation (PPPM) at 25°C | 3000W |
| Operating and storage temperatures | -55°C to + 150°C |


Mechanical Characteristics

- DO214AB package
- UL94V-0 Thermoset Epoxy
- Solder plated terminals
- Solderable per MIL-STD-750 Method 2026

Mechanical Dimensions

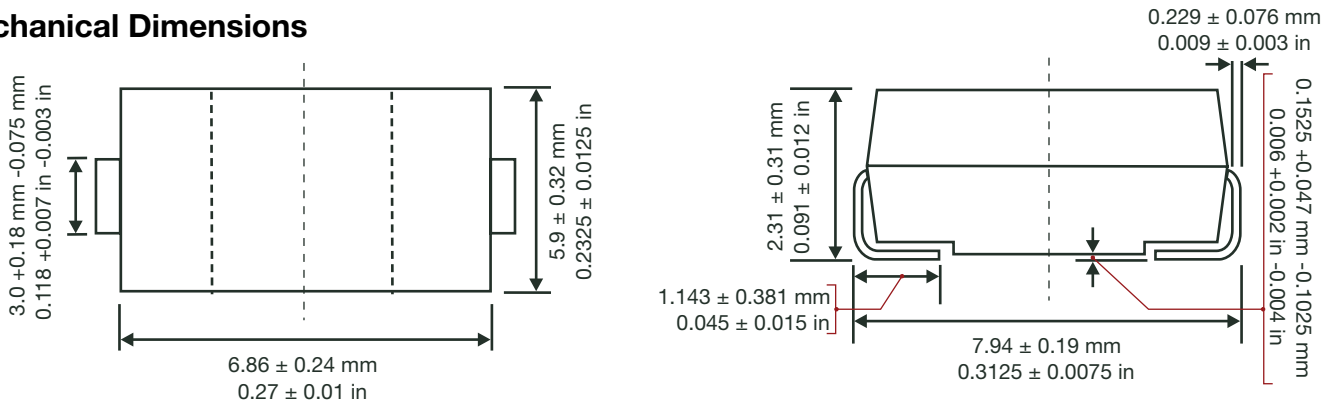

Standard Mounting Pad Layout



All dimensions in inches and (millimeters)

3.0SMCJ Series – 3000 Watt Surface Mount (continued)**Electrical Characteristics**

| Part Number* | Uni Part Marking | Bi Part Marking | Rated Standoff Voltage V _{wm} | Breakdown Voltage | | | Maximum Stand By Current @V _{WM} + I _d | 10/1000 μ s Maximum Clamping Voltage @I _{ppm} # V _c Max | 10/1000 μ s Rated Peak Impulse Current I _{ppm} # |
|--------------|------------------|-----------------|--|-------------------------|------|-----------------|--|---|---|
| | | | | V _{br} (Volts) | | @I _t | | | |
| | | | | (Volts) | Min | Max | | | |
| 3.0SMCJ5.0 | HDD | IDD | 5 | 6.4 | 7.55 | 10 | 1000 | 9.6 | 312.5 |
| 3.0SMCJ5.0A | HDE | IDE | 5 | 6.4 | 7.23 | 10 | 1000 | 9.2 | 326 |
| 3.0SMCJ6.0 | HDF | IDF | 6 | 6.67 | 8.45 | 10 | 1000 | 11.4 | 263.2 |
| 3.0SMCJ6.0A | HDG | IDG | 6 | 6.67 | 7.67 | 10 | 1000 | 10.3 | 291.3 |
| 3.0SMCJ6.5 | HDH | IDH | 6.5 | 7.22 | 9.14 | 10 | 500 | 12.3 | 243.9 |
| 3.0SMCJ6.5A | HDK | IDK | 6.5 | 7.22 | 8.3 | 10 | 500 | 11.2 | 267.9 |
| 3.0SMCJ7.0 | HDL | IDL | 7 | 7.78 | 9.86 | 10 | 200 | 13.3 | 225.6 |
| 3.0SMCJ7.0A | HDM | IDM | 7 | 7.78 | 8.95 | 10 | 200 | 12 | 250 |
| 3.0SMCJ7.5 | HDN | IDN | 7.5 | 8.33 | 10.8 | 1 | 100 | 14.3 | 209.8 |
| 3.0SMCJ7.5A | HDP | IDP | 7.5 | 8.33 | 9.58 | 1 | 100 | 12.9 | 232.6 |
| 3.0SMCJ8.0 | HDQ | IDQ | 8 | 8.89 | 11.3 | 1 | 50 | 15 | 200 |
| 3.0SMCJ8.0A | HDR | IDR | 8 | 8.89 | 10.2 | 1 | 50 | 13.6 | 220.6 |
| 3.0SMCJ8.5 | HDS | IDS | 8.5 | 9.44 | 11.9 | 1 | 25 | 15.9 | 188.8 |
| 3.0SMCJ8.5A | HDT | IDT | 8.5 | 9.44 | 10.8 | 1 | 25 | 14.4 | 208.4 |
| 3.0SMCJ9.0 | HDU | IDU | 9 | 10 | 12.8 | 1 | 10 | 16.9 | 177.4 |
| 3.0SMCJ9.0A | HDV | IDV | 9 | 10 | 11.5 | 1 | 10 | 15.4 | 194.8 |
| 3.0SMCJ10 | HDW | IDW | 10 | 11.1 | 14.1 | 1 | 5 | 18.8 | 159.6 |
| 3.0SMCJ10A | HDX | IDX | 10 | 11.1 | 12.8 | 1 | 5 | 17 | 176.4 |
| 3.0SMCJ11 | HDY | IDY | 11 | 12.2 | 15.4 | 1 | 5 | 20.1 | 149.2 |
| 3.0SMCJ11A | HDZ | IDZ | 11 | 12.2 | 14.4 | 1 | 5 | 18.2 | 184.8 |
| 3.0SMCJ12 | HED | IED | 12 | 13.3 | 16.9 | 1 | 5 | 22 | 136.4 |
| 3.0SMCJ12A | HEE | IEE | 12 | 13.3 | 15.3 | 1 | 5 | 19.9 | 150.6 |
| 3.0SMCJ13 | HEF | IEF | 13 | 14.4 | 18.2 | 1 | 5 | 23.8 | 126 |
| 3.0SMCJ13A | HEG | IEG | 13 | 14.4 | 16.5 | 1 | 5 | 21.5 | 139.4 |
| 3.0SMCJ14 | HEH | IEH | 14 | 15.6 | 19.8 | 1 | 5 | 25.8 | 116.2 |
| 3.0SMCJ14A | HEK | IEK | 14 | 15.6 | 17.9 | 1 | 5 | 23.2 | 129.4 |

* = Add "C" or "CA" suffix for bidirectional device types.

+ = For Bidirectional Types Having V_{WM} <= 10V, their I_D limit is doubled.

= See General Information for Impulse Current Waveform.

3.0SMCJ Series – 3000 Watt Surface Mount (continued)**Electrical Characteristics (continued)**

| Part Number* | Uni Part Marking | Bi Part Marking | Rated Standoff Voltage Vwm | Breakdown Voltage | | | Maximum Stand By Current @VWM+ Id | 10/1000µs Maximum Clamping Voltage @Ippm# Vc Max | 10/1000µs Rated Peak Impulse Current Ippm# |
|--------------|------------------|-----------------|----------------------------|-------------------|------|-----|-----------------------------------|--|--|
| | | | | Vbr (Volts) | | @It | | | |
| | | | | (Volts) | Min | Max | | | |
| 3.0SMCJ15 | HEL | IEL | 15 | 16.7 | 21.1 | 1 | 5 | 26.9 | 111.6 |
| 3.0SMCJ15A | HEM | IEM | 15 | 16.7 | 19.2 | 1 | 5 | 24.4 | 123 |
| 3.0SMCJ16 | HEN | IEN | 16 | 17.8 | 22.6 | 1 | 5 | 28.8 | 104.2 |
| 3.0SMCJ16A | HEP | IEP | 16 | 17.8 | 20.5 | 1 | 5 | 26 | 115.4 |
| 3.0SMCJ17 | HEQ | IEQ | 17 | 18.9 | 23.9 | 1 | 5 | 30.5 | 98.4 |
| 3.0SMCJ17A | HER | IER | 17 | 18.9 | 21.7 | 1 | 5 | 27.6 | 106.6 |
| 3.0SMCJ18 | HES | IES | 18 | 20.0 | 25.3 | 1 | 5 | 32.2 | 93.2 |
| 3.0SMCJ18A | HET | IET | 18 | 20.0 | 23.3 | 1 | 5 | 29.2 | 102.8 |
| 3.0SMCJ20 | HEU | IEU | 20 | 22.2 | 28.1 | 1 | 5 | 35.8 | 83.8 |
| 3.0SMCJ20A | HEV | IEV | 20 | 22.2 | 25.5 | 1 | 5 | 32.4 | 92.6 |
| 3.0SMCJ22 | HEW | IEW | 22 | 24.4 | 30.9 | 1 | 5 | 39.4 | 76.2 |
| 3.0SMCJ22A | HEX | IEX | 22 | 24.4 | 28.0 | 1 | 5 | 35.5 | 84.4 |
| 3.0SMCJ24 | HEY | IEY | 24 | 26.7 | 33.8 | 1 | 5 | 43 | 69.8 |
| 3.0SMCJ24A | HEZ | IEZ | 24 | 26.7 | 30.7 | 1 | 5 | 38.9 | 77.2 |
| 3.0SMCJ26 | HFD | IFD | 26 | 28.9 | 36.8 | 1 | 5 | 46.6 | 64.4 |
| 3.0SMCJ26A | HFE | IFE | 26 | 28.9 | 32.2 | 1 | 5 | 42.1 | 71.2 |
| 3.0SMCJ28 | HFF | IFF | 28 | 31.1 | 39.4 | 1 | 5 | 50 | 60 |
| 3.0SMCJ28A | HFG | IFG | 28 | 31.1 | 35.8 | 1 | 5 | 45.4 | 66 |
| 3.0SMCJ30 | HFH | IFH | 30 | 33.3 | 42.4 | 1 | 5 | 53.5 | 56 |
| 3.0SMCJ30A | HFK | IFK | 30 | 33.3 | 38.3 | 1 | 5 | 46.6 | 62 |
| 3.0SMCJ33 | HFL | IFL | 33 | 36.7 | 46.9 | 1 | 5 | 59 | 50.4 |
| 3.0SMCJ33A | HFM | IFM | 33 | 36.7 | 42.2 | 1 | 5 | 53.3 | 56.2 |
| 3.0SMCJ36 | HFN | IFN | 36 | 40.0 | 50.7 | 1 | 5 | 64.3 | 46.6 |
| 3.0SMCJ36A | HFP | IFP | 36 | 40.0 | 46.0 | 1 | 5 | 58.1 | 51.6 |
| 3.0SMCJ40 | HFQ | IFQ | 40 | 44.4 | 56.3 | 1 | 5 | 71.4 | 42 |
| 3.0SMCJ40A | HFR | IFR | 40 | 44.4 | 51.1 | 1 | 5 | 64.5 | 46.4 |

* = Add "C" or "CA" suffix for bidirectional device types.

+ = For Bidirectional Types Having VWM <= 10V, their ID limit is doubled.

= See General Information for Impulse Current Waveform.

3.0SMCJ Series – 3000 Watt Surface Mount (continued)**Electrical Characteristics (continued)**

| Part Number* | Uni Part Marking | Bi Part Marking | Rated Standoff Voltage Vwm | Breakdown Voltage | | | Maximum Stand By Current @VWM+ Id | 10/1000µs Maximum Clamping Voltage @Ippm# Vc Max | 10/1000µs Rated Peak Impulse Current Ippm# |
|--------------|------------------|-----------------|----------------------------|-------------------|-------|-----|-----------------------------------|--|--|
| | | | | Vbr (Volts) | | @It | | | |
| | | | | (Volts) | Min | Max | | | |
| 3.0SMCJ43 | HFS | IFS | 43 | 47.8 | 60.5 | 1 | 5 | 76.7 | 39.2 |
| 3.0SMCJ43A | HFT | IFT | 43 | 47.8 | 54.9 | 1 | 5 | 69.4 | 43.2 |
| 3.0SMCJ45 | HFU | IFU | 45 | 50 | 63.3 | 1 | 5 | 80.3 | 37.4 |
| 3.0SMCJ45A | HFV | IFV | 45 | 50 | 57.5 | 1 | 5 | 72.7 | 41.2 |
| 3.0SMCJ48 | HFV | IFV | 48 | 53.3 | 67.5 | 1 | 5 | 85.5 | 35 |
| 3.0SMCJ48A | HFX | IFX | 48 | 53.3 | 61.3 | 1 | 5 | 77.4 | 38.8 |
| 3.0SMCJ51 | HFY | IFY | 51 | 56.7 | 71.8 | 1 | 5 | 91.1 | 37 |
| 3.0SMCJ51A | HFZ | IFZ | 51 | 56.7 | 65.2 | 1 | 5 | 82.4 | 36.4 |
| 3.0SMCJ54 | HGD | IGD | 54 | 60 | 76 | 1 | 5 | 96.3 | 31.2 |
| 3.0SMCJ54A | HGE | IGE | 54 | 60 | 69 | 1 | 5 | 87.1 | 34.4 |
| 3.0SMCJ58 | HGF | IGF | 58 | 64.4 | 81.6 | 1 | 5 | 103 | 39.2 |
| 3.0SMCJ58A | HGG | IGG | 58 | 64.4 | 74.6 | 1 | 5 | 93.6 | 32 |
| 3.0SMCJ60 | HGH | IGH | 60 | 66.7 | 84.5 | 1 | 5 | 107 | 28 |
| 3.0SMCJ60A | HGK | IGK | 60 | 66.7 | 76.7 | 1 | 5 | 96.8 | 31 |
| 3.0SMCJ64 | HGL | IGL | 64 | 71.1 | 90.1 | 1 | 5 | 114 | 26.4 |
| 3.0SMCJ64A | HGM | IGM | 64 | 71.1 | 81.8 | 1 | 5 | 103 | 29.2 |
| 3.0SMCJ70 | HGN | IGN | 70 | 77.8 | 98.6 | 1 | 5 | 125 | 24 |
| 3.0SMCJ70A | HGP | IGP | 70 | 77.8 | 89.5 | 1 | 5 | 113 | 26.6 |
| 3.0SMCJ75 | HGQ | IGQ | 75 | 83.3 | 106 | 1 | 5 | 134 | 22.4 |
| 3.0SMCJ75A | HGR | IGR | 75 | 83.3 | 95.8 | 1 | 5 | 121 | 24.8 |
| 3.0SMCJ78 | HGS | IGS | 78 | 86.7 | 110 | 1 | 5 | 139 | 21.6 |
| 3.0SMCJ78A | HGT | IGT | 78 | 86.7 | 99.7 | 1 | 5 | 126 | 22.8 |
| 3.0SMCJ85 | HGU | IGU | 85 | 94.4 | 119.2 | 1 | 5 | 151 | 19.8 |
| 3.0SMCJ85A | HGV | IGV | 85 | 94.4 | 108.2 | 1 | 5 | 137 | 20.8 |
| 3.0SMCJ90 | HGW | IGW | 90 | 100 | 126.5 | 1 | 5 | 160 | 18.8 |
| 3.0SMCJ90A | HGX | IGX | 90 | 100 | 115.5 | 1 | 5 | 146 | 20.6 |

* = Add "C" or "CA" suffix for bidirectional device types.

+ = For Bidirectional Types Having VWM <= 10V, their ID limit is doubled.

= See General Information for Impulse Current Waveform.

3.0SMCJ Series – 3000 Watt Surface Mount (continued)**Electrical Characteristics (continued)**

| Part Number* | Uni Part Marking | Bi Part Marking | Rated Standoff Voltage V _{wm} | Breakdown Voltage | | | Maximum Stand By Current @V _{WM} + I _d | 10/1000 μ s Maximum Clamping Voltage @I _{ppm} # V _c Max | 10/1000 μ s Rated Peak Impulse Current I _{ppm} # |
|--------------|------------------|-----------------|--|-------------------------|-------|-----------------|--|---|---|
| | | | | V _{br} (Volts) | | @I _t | | | |
| | | | | (Volts) | Min | Max | | | |
| 3.0SMCJ100 | HGY | IGY | 100 | 111 | 141 | 1 | 5 | 179 | 16.6 |
| 3.0SMCJ100A | HGZ | IGZ | 100 | 111 | 128 | 1 | 5 | 162 | 18.6 |
| 3.0SMCJ110 | HHD | IHD | 110 | 122 | 154 | 1 | 5 | 196 | 15.4 |
| 3.0SMCJ110A | HHE | IHE | 110 | 122 | 140 | 1 | 5 | 177 | 16.8 |
| 3.0SMCJ120 | HHF | IHF | 120 | 133 | 169 | 1 | 5 | 214 | 14 |
| 3.0SMCJ120A | HHG | IHG | 120 | 133 | 153 | 1 | 5 | 193 | 15.6 |
| 3.0SMCJ130 | HHH | IHH | 130 | 144 | 182 | 1 | 5 | 231 | 13 |
| 3.0SMCJ130A | HHK | IHK | 130 | 144 | 165 | 1 | 5 | 209 | 14.4 |
| 3.0SMCJ150 | HHL | IHL | 150 | 167 | 211.5 | 1 | 5 | 268 | 11.2 |
| 3.0SMCJ150A | HHM | IHM | 150 | 167 | 192 | 1 | 5 | 243 | 12.4 |
| 3.0SMCJ160 | HHN | IHN | 160 | 178 | 226 | 1 | 5 | 287 | 10.4 |
| 3.0SMCJ160A | HHP | IHP | 160 | 178 | 205 | 1 | 5 | 259 | 11.6 |
| 3.0SMCJ170 | HHQ | IHQ | 170 | 189 | 239.5 | 1 | 5 | 304 | 9.8 |
| 3.0SMCJ170A | HHR | IHR | 170 | 189 | 217.5 | 1 | 5 | 275 | 11 |

* = Add "C" or "CA" suffix for bidirectional device types.

+ = For Bidirectional Types Having V_{WM} <= 10V, their I_D limit is doubled.

= See General Information for Impulse Current Waveform.



5.0SMCJ Series – 5000 Watt Surface Mount



5.0SMCJ Series Features

- RoHS Compliance Standard
- 5000 watt peak pulse power dissipation
- Available in voltages from 11V to 170V
- Unidirectional and bidirectional
- Glass passivated junction
- Low clamping factor
- Available in tape and reel (Reel quantity = 3,000 pieces)
- Each device 100% surge tested
- UL 497B Recognized, File # E135015 (PENDING)
- Tape and Reel to EIA Standard RS-481-A


Absolute Maximum Ratings

| Parameter | Value |
|---|------------------|
| Peak pulse power dissipation (PPPM) at 25°C | 5000W |
| Operating and storage temperatures | -55°C to + 150°C |


Mechanical Characteristics

- DO214AB package
- UL94V-0 Thermoset Epoxy
- Solder plated terminals
- Solderable per MIL-STD-750 Method 2026

Mechanical Dimensions

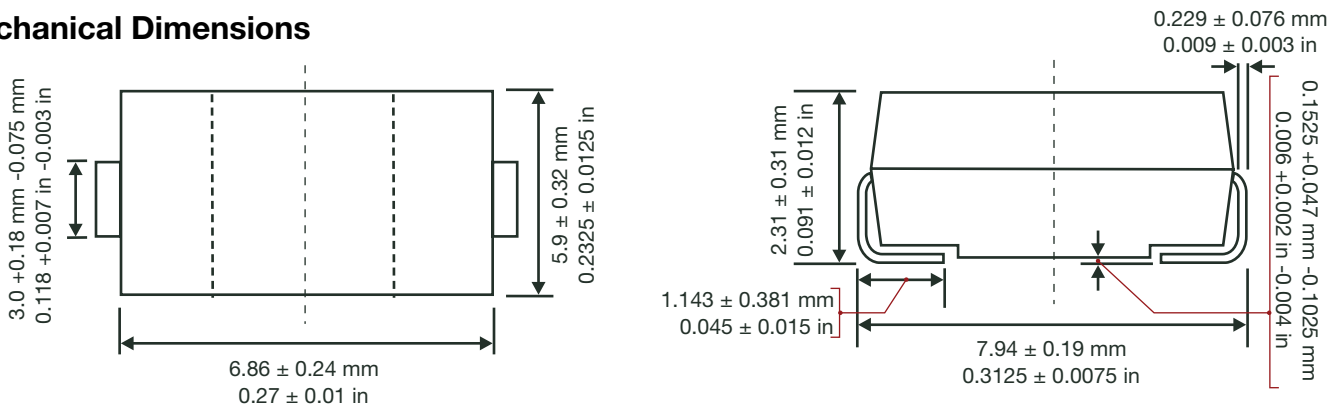

Standard Mounting Pad Layout



All dimensions in inches and (millimeters)

5.0SMCJ Series – 5000 Watt Surface Mount

Electrical Characteristics (continued)

| Part Number | Uni Part Marking | Bi Part Marking | Rated Standoff Voltage Vwm | Breakdown Voltage | | | Maximum Stand By Current @VWM Id | 10/1000 μ s Maximum Clamping Voltage @Ippm# Vc Max | 10/1000 μ s Rated Peak Impulse Current Ippm# |
|-------------|------------------|-----------------|----------------------------|-------------------|-------|-----|----------------------------------|--|--|
| | | | | Vbr (Volts) | | @It | | | |
| | | | | (Volts) | Min | Max | | | |
| 5.0SMCJ11A | 5PEN | 5BEN | 11 | 12.2 | 13.5 | 10 | 800 | 18.2 | 275 |
| 5.0SMCJ12A | 5PEP | 5BEP | 12 | 13.3 | 14.7 | 10 | 800 | 19.9 | 252 |
| 5.0SMCJ13A | 5PEQ | 5BEQ | 13 | 14.4 | 15.9 | 10 | 500 | 21.5 | 233 |
| 5.0SMCJ14A | 5PER | 5BER | 14 | 15.6 | 17.2 | 10 | 200 | 23.2 | 216 |
| 5.0SMCJ15A | 5PES | 5BES | 15 | 16.7 | 18.5 | 1 | 100 | 24.4 | 205 |
| 5.0SMCJ16A | 5PET | 5BET | 16 | 17.8 | 19.7 | 1 | 50 | 26.0 | 193 |
| 5.0SMCJ17A | 5PEU | 5BEU | 17 | 18.9 | 20.9 | 1 | 20 | 27.6 | 181 |
| 5.0SMCJ18A | OET | 5BEV | 18 | 20 | 22.1 | 1 | 5 | 29.2 | 171.2 |
| 5.0SMCJ20A | OEV | 5BEW | 20 | 22.2 | 24.5 | 1 | 5 | 32.4 | 154.3 |
| 5.0SMCJ22A | OEX | 5BEX | 22 | 24.4 | 27.0 | 1 | 5 | 35.5 | 140.8 |
| 5.0SMCJ24A | OEZ | 5BEZ | 24 | 26.7 | 29.5 | 1 | 5 | 38.9 | 128.5 |
| 5.0SMCJ26A | OFE | 5BFE | 26 | 28.9 | 31.9 | 1 | 5 | 42.1 | 118.8 |
| 5.0SMCJ28A | OFG | 5BFG | 28 | 31.1 | 34.4 | 1 | 5 | 45.4 | 110.0 |
| 5.0SMCJ30A | OFK | 5BEK | 30 | 33.3 | 36.8 | 1 | 5 | 48.4 | 103.3 |
| 5.0SMCJ33A | OFM | 5BFM | 33 | 36.7 | 40.6 | 1 | 5 | 53.3 | 93.8 |
| 5.0SMCJ36A | OFP | 5BFP | 36 | 40 | 44.2 | 1 | 5 | 58.1 | 86.1 |
| 5.0SMCJ40A | 5PFR | 5BFR | 40 | 44.4 | 49.1 | 1 | 5 | 64.5 | 77.6 |
| 5.0SMCJ43A | 5PFT | 5BFT | 43 | 47.8 | 52.8 | 1 | 5 | 69.4 | 72.1 |
| 5.0SMCJ45A | 5PFV | 5BFV | 45 | 50.0 | 55.3 | 1 | 5 | 72.7 | 68.8 |
| 5.0SMCJ48A | 5PFX | --- | 48 | 53.3 | 58.9 | 1 | 5 | 77.4 | 64.7 |
| 5.0SMCJ51A | 5PFZ | --- | 51 | 56.7 | 62.7 | 1 | 5 | 82.4 | 60.7 |
| 5.0SMCJ54A | 5RGE | --- | 54 | 60.0 | 66.3 | 1 | 5 | 87.1 | 57.5 |
| 5.0SMCJ58A | 5PGG | --- | 58 | 64.4 | 71.2 | 1 | 5 | 93.6 | 53.5 |
| 5.0SMCJ60A | 5PGK | --- | 60 | 66.7 | 73.7 | 1 | 5 | 96.8 | 51.7 |
| 5.0SMCJ64A | 5PGM | --- | 64 | 71.1 | 78.6 | 1 | 5 | 103.0 | 48.6 |
| 5.0SMCJ70A | 5PGP | --- | 70 | 77.8 | 86.0 | 1 | 5 | 113.0 | 44.3 |
| 5.0SMCJ75A | 5PGR | --- | 75 | 83.3 | 92.1 | 1 | 5 | 121.0 | 41.4 |
| 5.0SMCJ78A | 5PGT | --- | 78 | 86.7 | 95.8 | 1 | 5 | 126.0 | 39.7 |
| 5.0SMCJ85A | 5PGV | --- | 85 | 94.4 | 104.0 | 1 | 5 | 137.0 | 36.5 |
| 5.0SMCJ90A | 5PGX | --- | 90 | 100.0 | 111.0 | 1 | 5 | 146.0 | 34.3 |
| 5.0SMCJ100A | 5PGZ | --- | 100 | 111.0 | 123.0 | 1 | 5 | 162.0 | 30.9 |
| 5.0SMCJ110A | 5PHE | --- | 110 | 122.0 | 135.0 | 1 | 5 | 177.0 | 28.3 |
| 5.0SMCJ120A | 5PHG | --- | 120 | 133.0 | 147.0 | 1 | 5 | 193.0 | 26.0 |
| 5.0SMCJ130A | 5PHK | --- | 130 | 144.0 | 159.0 | 1 | 5 | 209.0 | 24.0 |
| 5.0SMCJ150A | 5PHM | --- | 150 | 167.0 | 185.0 | 1 | 5 | 243.0 | 20.6 |
| 5.0SMCJ160A | 5PHP | --- | 160 | 178.0 | 197.0 | 1 | 5 | 259.0 | 19.3 |
| 5.0SMCJ170A | 5PHR | --- | 170 | 189.0 | 209.0 | 1 | 5 | 275.0 | 18.2 |


* = Add "CA" suffix for bidirectional device types.

+ = For Bidirectional Types Having VWM \leq 10V, their ID limit is doubled.


= See General Information for Impulse Current Waveform.

Circuit Examples


Data Line Protection

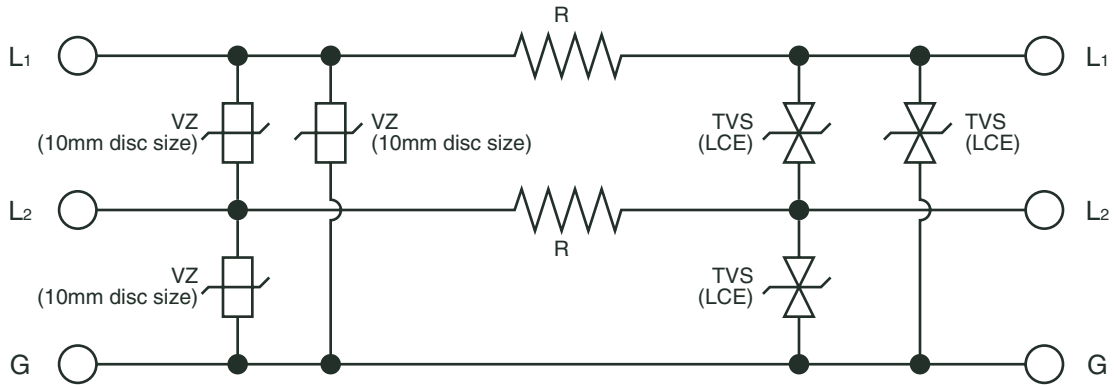


AC Line Protection

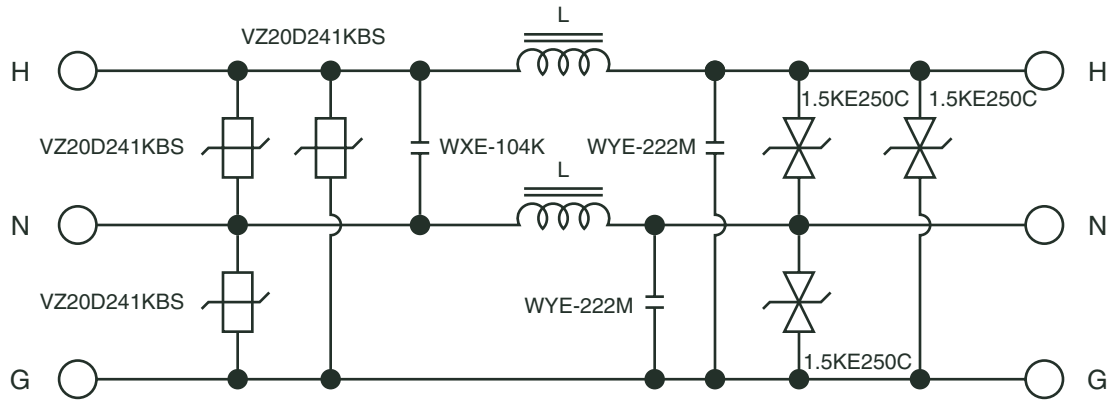


Telecom Circuit Protection

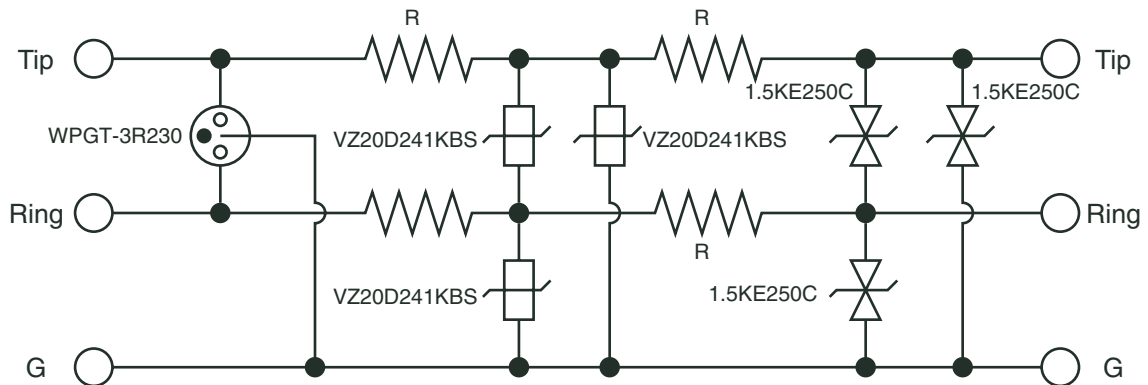

Applications

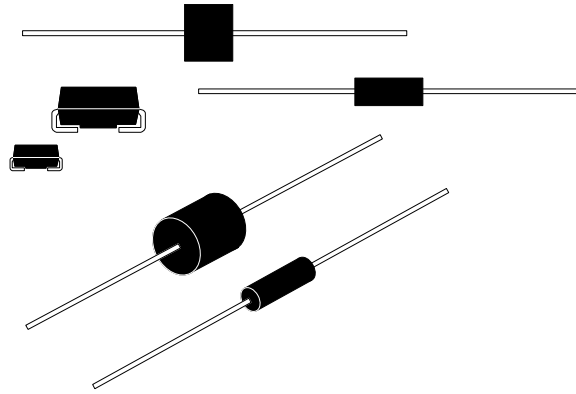

Transient Voltage Suppression Diodes or TVSD is a semiconductor diode with a single P-N junction which may operate in either direction and employs its breakdown characteristics as part of its function. This device limits (clamp) transient voltages and diverts transient currents.

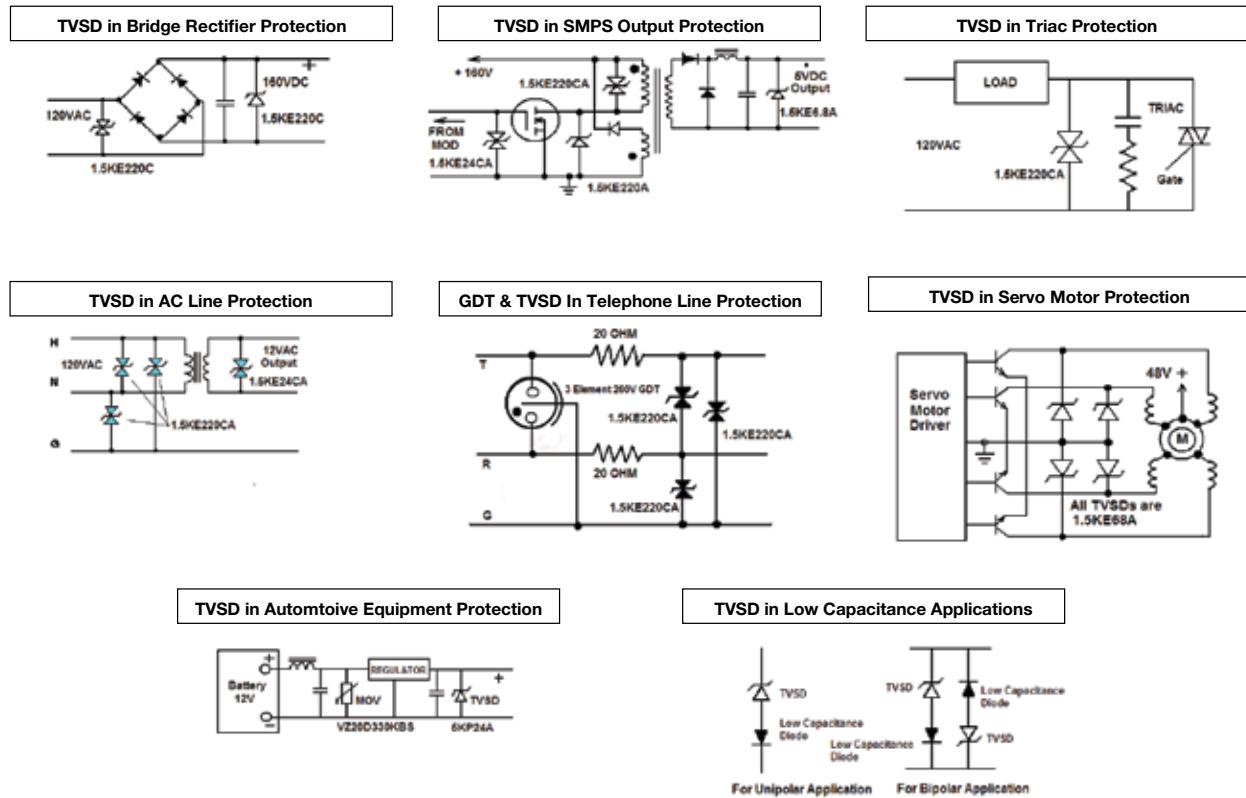

All application notes/circuits are shown as examples only. It is the responsibility of the purchaser to insure that the application meets purchaser's specifications. No representation or warranty, whether express or implied, is given and no liability is assumed by WPI with respect to the use of such examples.

WPI Reserves Copyright

DISCLAIMER: The names of the products and the specifications in this catalog are subject to change without notice for the sake of improvement. World Products, LLC also reserves the right to discontinue any of these products. The products in this catalog are intended for use in ordinary electronic products. If any of these products are to be used in special applications requiring extremely high reliability, where product defects might pose a safety risk, please consult World Products, LLC. Though World Products, LLC has taken all possible precautions to ensure the quality and reliability of its products, improper use of products may result in bodily injury, fire, or similar accident. If you have any questions regarding the use of the products in question, please consult World Products, LLC. Please be advised that World Products, LLC accepts no responsibility for any infringement by users of World Products, LLC products on third party patents or industrial copyrights.

THIS PAGE WAS INTENTIONALLY LEFT BLANK.