

## Features

- For surface mount applications in order to optimize board space
- Lead Free Finish/Rohs Compliant (Note1) ("P" Suffix designates Compliant. See ordering information)
- Fast response time: typical less than 1.0ps from 0 volts to  $V_{BR}$  minimum
- Low inductance
- UL Recognized File # E331408

## Mechanical Data

- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1
- Terminals: solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes positive end (cathode) except Bidirectional
- Maximum soldering temperature: 260°C for 10 seconds

### Maximum Ratings @ 25°C Unless Otherwise Specified

|  |                |                 |             |
|--|----------------|-----------------|-------------|
| Peak Pulse Current on 10/1000us waveform | $I_{PP}$       | See Table 1     | Note: 2     |
| Peak Pulse Power Dissipation             | $P_{PP}$       | 600W            | Note: 2, 3  |
| Peak Forward Surge Current               | $I_{FSM}$      | 100A            | Note: 3 4,5 |
| Operation And Storage Temperature Range  | $T_J, T_{STG}$ | -55°C to +175°C |             |
| Thermal Resistance                       | R              | 33°C/W          |             |


### NOTES:

1. High Temperature Solder Exemptions Applied, see EU Directive Annex 7.
2. Non-repetitive current pulse, per Fig.3 and derated above  $T_A=25^\circ\text{C}$  per Fig.2.
3. Mounted on 5.0mm<sup>2</sup> copper pads to each terminal.
4. 8.3ms, single half sine wave duty cycle=4 pulses per. Minute maximum.
5. Peak pulse current waveform is 10/1000us, with maximum duty Cycle of 0.01%.
6. Unidirectional and bidirectional available, for bidirectional devices add 'C' suffix to the pn#, i.e.SMBJ5.0CA
7. For bi-directional type having  $V_{rwm}$  of 10 Volts and less, the IR limit is double.

# SMBJ5.0 THRU SMBJ440CA


## Transient Voltage Suppressor 5.0 to 440 Volts 600 Watt

### DO-214AA (SMB) (LEAD FRAME)

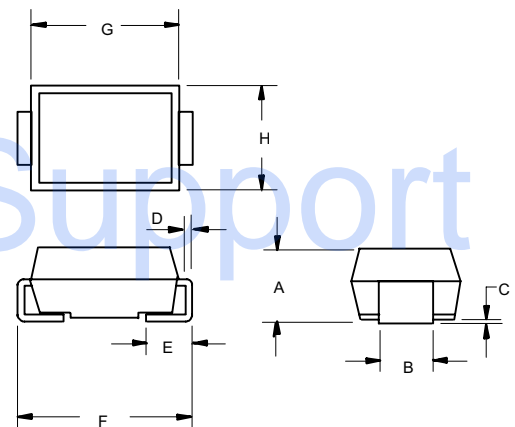

| DIM | INCHES |      | MM    |       | NOTE |
|-----|--------|------|-------|-------|------|
|     | MIN    | MAX  | MIN   | MAX   |      |
| A   | .083   | .096 | 2.13  | 2.44  |      |
| B   | .075   | .083 | 1.91  | 2.11  |      |
| C   | .002   | .008 | 0.051 | 0.203 |      |
| D   | .006   | .012 | 0.152 | 0.305 |      |
| E   | .030   | .050 | 0.76  | 1.27  |      |
| F   | .200   | .220 | 5.08  | 5.59  |      |
| G   | .160   | .185 | 4.06  | 4.70  |      |
| H   | .130   | .155 | 3.30  | 3.94  |      |

### SUGGESTED SOLDER PAD LAYOUT

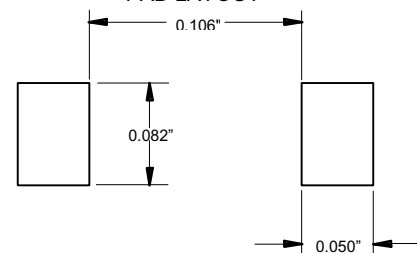

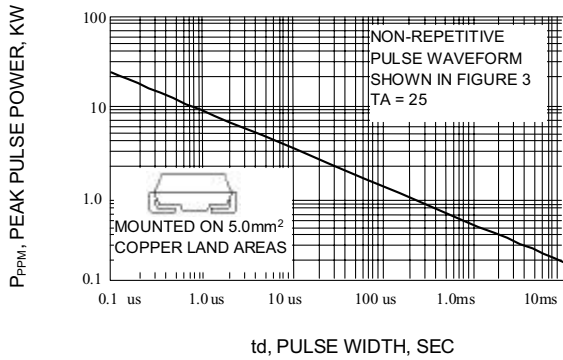


Fig. 1-PEAK PULSE POWER RATING CURVE

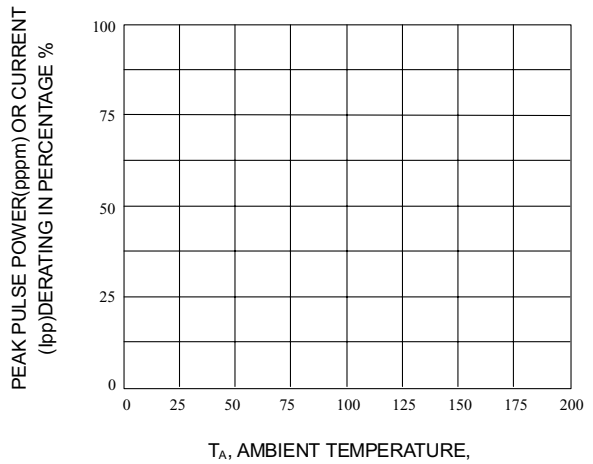


Fig. 2-PULSE DERATING CURVE



Fig. 3-PULSE WAVEFORM



Fig. 4-TYPICAL JUNCTION CAPACITANCE

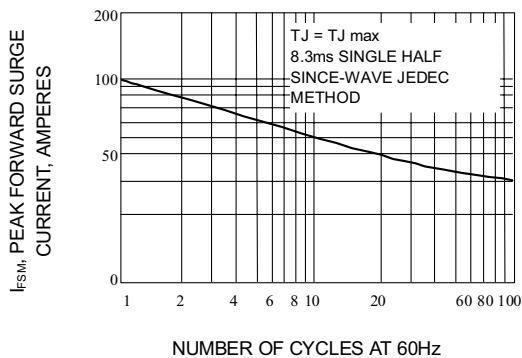


Fig. 5-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

# SMBJ5.0(A) thru SMBJ440(A)

## Electrical Characteristics @ 25°C Unless Otherwise Specified

| MCC PART NUMBER | REVERSE STAND-OFF VOLTAGE | BREAKDOWN VOLTAGE  |      |            | MAXIMUM CLAMPING VOLTAGE@ $I_{PP}$ | PEAK PULSE CURRENT $I_{PP}$ | MAXIMUM REVERSE LEAKAGE @ $V_{WM}$ | MARKING CODE |
|-----------------|---------------------------|--------------------|------|------------|------------------------------------|-----------------------------|------------------------------------|--------------|
|                 | $V_{WM}$                  | $V_{(BR)}$ @ $I_T$ |      | $I_T$ (mA) |                                    |                             |                                    |              |
|                 | VOLTS                     | MIN                | MAX  |            |                                    |                             |                                    |              |
| SMBJ5.0         | 5.0                       | 6.40               | 7.30 | 10         | 9.6                                | 62.5                        | 800                                | KD           |
| SMBJ5.0A        | 5.0                       | 6.40               | 7.00 | 10         | 9.2                                | 65.2                        | 800                                | KE           |
| SMBJ6.0         | 6.0                       | 6.67               | 8.15 | 10         | 11.4                               | 52.6                        | 800                                | KF           |
| SMBJ6.0A        | 6.0                       | 6.67               | 7.37 | 10         | 10.3                               | 58.3                        | 800                                | KG           |
| SMBJ6.5         | 6.5                       | 7.22               | 8.82 | 10         | 12.3                               | 48.7                        | 500                                | KH           |
| SMBJ6.5A        | 6.5                       | 7.22               | 7.98 | 10         | 11.2                               | 53.6                        | 500                                | KK           |
| SMBJ7.0         | 7.0                       | 7.78               | 9.51 | 10         | 13.3                               | 45.1                        | 200                                | KL           |
| SMBJ7.0A        | 7.0                       | 7.78               | 8.60 | 10         | 12.0                               | 50.0                        | 200                                | KM           |
| SMBJ7.5         | 7.5                       | 8.33               | 10.2 | 1          | 14.3                               | 42.0                        | 100                                | KN           |
| SMBJ7.5A        | 7.5                       | 8.33               | 9.21 | 1          | 12.9                               | 46.5                        | 100                                | KP           |
| SMBJ8.0         | 8.0                       | 8.89               | 10.9 | 1          | 15.0                               | 40.0                        | 50                                 | KQ           |
| SMBJ8.0A        | 8.0                       | 8.89               | 9.83 | 1          | 13.6                               | 44.1                        | 50                                 | KR           |
| SMBJ8.5         | 8.5                       | 9.44               | 11.5 | 1          | 15.9                               | 37.7                        | 10                                 | KS           |
| SMBJ8.5A        | 8.5                       | 9.44               | 10.4 | 1          | 14.4                               | 41.7                        | 10                                 | KT           |
| SMBJ9.0         | 9.0                       | 10.0               | 12.2 | 1          | 16.9                               | 35.5                        | 5                                  | KU           |
| SMBJ9.0A        | 9.0                       | 10.0               | 11.1 | 1          | 15.4                               | 39.0                        | 5                                  | KV           |
| SMBJ10          | 10                        | 11.1               | 13.6 | 1          | 18.8                               | 31.9                        | 5                                  | KW           |
| SMBJ10A         | 10                        | 11.1               | 12.3 | 1          | 17.0                               | 35.3                        | 5                                  | KX           |
| SMBJ11          | 11                        | 12.2               | 14.9 | 1          | 20.1                               | 29.9                        | 5                                  | KY           |
| SMBJ11A         | 11                        | 12.2               | 13.5 | 1          | 18.2                               | 33.0                        | 5                                  | KZ           |
| SMBJ12          | 12                        | 13.3               | 16.3 | 1          | 22.0                               | 27.3                        | 5                                  | LD           |
| SMBJ12A         | 12                        | 13.3               | 14.7 | 1          | 19.9                               | 30.2                        | 5                                  | LE           |
| SMBJ13          | 13                        | 14.4               | 17.6 | 1          | 23.8                               | 25.2                        | 5                                  | LF           |
| SMBJ13A         | 13                        | 14.4               | 15.9 | 1          | 21.5                               | 27.9                        | 5                                  | LG           |
| SMBJ14          | 14                        | 15.6               | 19.1 | 1          | 25.8                               | 23.3                        | 5                                  | LH           |
| SMBJ14A         | 14                        | 15.6               | 17.2 | 1          | 23.2                               | 25.8                        | 5                                  | LK           |
| SMBJ15          | 15                        | 16.7               | 20.4 | 1          | 26.9                               | 22.3                        | 5                                  | LL           |
| SMBJ15A         | 15                        | 16.7               | 18.5 | 1          | 24.4                               | 24.0                        | 5                                  | LM           |
| SMBJ16          | 16                        | 17.8               | 21.8 | 1          | 28.8                               | 20.8                        | 5                                  | LN           |
| SMBJ16A         | 16                        | 17.8               | 19.7 | 1          | 26.0                               | 23.1                        | 5                                  | LP           |
| SMBJ17          | 17                        | 18.9               | 23.1 | 1          | 30.5                               | 19.7                        | 5                                  | LQ           |
| SMBJ17A         | 17                        | 18.9               | 20.9 | 1          | 27.6                               | 21.7                        | 5                                  | LR           |
| SMBJ18          | 18                        | 20.0               | 24.4 | 1          | 32.2                               | 18.6                        | 5                                  | LS           |
| SMBJ18A         | 18                        | 20.0               | 22.1 | 1          | 29.2                               | 20.5                        | 5                                  | LT           |
| SMBJ20          | 20                        | 22.2               | 27.1 | 1          | 35.8                               | 16.7                        | 5                                  | LU           |
| SMBJ20A         | 20                        | 22.2               | 24.5 | 1          | 32.4                               | 18.5                        | 5                                  | LV           |
| SMBJ22          | 22                        | 24.4               | 29.8 | 1          | 39.4                               | 15.2                        | 5                                  | LW           |
| SMBJ22A         | 22                        | 24.4               | 26.9 | 1          | 35.5                               | 16.9                        | 5                                  | LX           |
| SMBJ24          | 24                        | 26.7               | 32.6 | 1          | 43.0                               | 14.0                        | 5                                  | LY           |
| SMBJ24A         | 24                        | 26.7               | 29.5 | 1          | 38.9                               | 15.4                        | 5                                  | LZ           |
| SMBJ26          | 26                        | 28.9               | 35.3 | 1          | 46.6                               | 12.4                        | 5                                  | MD           |
| SMBJ26A         | 26                        | 28.9               | 31.9 | 1          | 42.1                               | 14.2                        | 5                                  | ME           |

# SMBJ5.0(A) thru SMBJ440(A)

## Electrical Characteristics @ 25°C Unless Otherwise Specified

| MCC PART NUMBER | REVERSE STAND-OFF VOLTAGE<br>$V_{WM}$ | BREAKDOWN VOLTAGE<br>$V_{(BR)}$ @ $I_T$<br>(VOLTS) |      |            | MAXIMUM CLAMPING VOLTAGE @ $I_{PP}$<br>VOLTS | PEAK PULSE CURRENT<br>$I_{PP}$<br>(AMPS) | MAXIMUM REVERSE LEAKAGE @ $V_{WM}$<br>$I_b$<br>( $\mu$ A) | MARKING CODE |
|-----------------|---------------------------------------|--|------|------------|--|--|---|--------------|
|                 |                                       | MIN  | MAX  | $I_T$ (mA) |  |  |   |              |
|                 | VOLTS                                 |  |      |            |  |  |   |              |
| SMBJ28          | 28                                    | 31.1   | 38.0 | 1          | 50.0   | 12.0                                     | 5   | MF           |
| SMBJ28A         | 28                                    | 31.1   | 34.4 | 1          | 45.4   | 13.2                                     | 5   | MG           |
| SMBJ30          | 30                                    | 33.3   | 40.7 | 1          | 53.5   | 11.2                                     | 5   | MH           |
| SMBJ30A         | 30                                    | 33.3   | 36.8 | 1          | 48.4   | 12.4                                     | 5   | MK           |
| SMBJ33          | 33                                    | 36.7   | 44.9 | 1          | 59.0   | 10.2                                     | 5   | ML           |
| SMBJ33A         | 33                                    | 36.7   | 40.6 | 1          | 53.3   | 11.3                                     | 5   | MM           |
| SMBJ36          | 36                                    | 40.0   | 48.9 | 1          | 64.3   | 9.3                                      | 5   | MN           |
| SMBJ36A         | 36                                    | 40.0   | 44.2 | 1          | 58.1   | 10.3                                     | 5   | MP           |
| SMBJ40          | 40                                    | 44.4   | 54.3 | 1          | 71.4   | 8.4                                      | 5   | MQ           |
| SMBJ40A         | 40                                    | 44.4   | 49.1 | 1          | 64.5   | 9.3                                      | 5   | MR           |
| SMBJ43          | 43                                    | 47.8   | 58.4 | 1          | 76.7   | 7.8                                      | 5   | MS           |
| SMBJ43A         | 43                                    | 47.8   | 52.8 | 1          | 69.4   | 8.6                                      | 5   | MT           |
| SMBJ45          | 45                                    | 50.0   | 61.1 | 1          | 80.3   | 7.5                                      | 5   | MU           |
| SMBJ45A         | 45                                    | 50.0   | 55.3 | 1          | 72.7   | 8.3                                      | 5   | MV           |
| SMBJ48          | 48                                    | 53.3   | 65.1 | 1          | 85.5   | 7.0                                      | 5   | MW           |
| SMBJ48A         | 48                                    | 53.3   | 58.9 | 1          | 77.4   | 7.7                                      | 5   | MX           |
| SMBJ51          | 51                                    | 56.7   | 69.3 | 1          | 91.1   | 6.6                                      | 5   | MY           |
| SMBJ51A         | 51                                    | 56.7   | 62.7 | 1          | 82.4   | 7.3                                      | 5   | MZ           |
| SMBJ54          | 54                                    | 60.0   | 73.3 | 1          | 96.3   | 6.2                                      | 5   | ND           |
| SMBJ54A         | 54                                    | 60.0   | 66.3 | 1          | 87.1   | 6.9                                      | 5   | NE           |
| SMBJ58          | 58                                    | 64.4   | 78.7 | 1          | 103  | 5.8                                      | 5   | NF           |
| SMBJ58A         | 58                                    | 64.4   | 71.2 | 1          | 93.6   | 6.4                                      | 5   | NG           |
| SMBJ60          | 60                                    | 66.7   | 81.5 | 1          | 107  | 5.6                                      | 5   | NH           |
| SMBJ60A         | 60                                    | 66.7   | 73.7 | 1          | 96.8   | 6.2                                      | 5   | NK           |
| SMBJ64          | 64                                    | 71.1   | 86.9 | 1          | 114  | 5.3                                      | 5   | NL           |
| SMBJ64A         | 64                                    | 71.1   | 78.6 | 1          | 103  | 5.8                                      | 5   | NM           |
| SMBJ70          | 70                                    | 77.8   | 95.1 | 1          | 125  | 4.8                                      | 5   | NN           |
| SMBJ70A         | 70                                    | 77.8   | 86.0 | 1          | 113  | 5.3                                      | 5   | NP           |
| SMBJ75          | 75                                    | 83.3   | 102  | 1          | 134  | 4.5                                      | 5   | NQ           |
| SMBJ75A         | 75                                    | 83.3   | 92.1 | 1          | 121  | 4.9                                      | 5   | NR           |
| SMBJ78          | 78                                    | 86.7   | 106  | 1          | 139  | 4.3                                      | 5   | NS           |
| SMBJ78A         | 78                                    | 86.7   | 95.8 | 1          | 126  | 4.7                                      | 5   | NT           |
| SMBJ85          | 85                                    | 94.4   | 115  | 1          | 151  | 3.9                                      | 5   | NU           |
| SMBJ85A         | 85                                    | 94.4   | 104  | 1          | 137  | 4.4                                      | 5   | NV           |
| SMBJ90          | 90                                    | 100  | 122  | 1          | 160  | 3.8                                      | 5   | NW           |
| SMBJ90A         | 90                                    | 100  | 111  | 1          | 146  | 4.1                                      | 5   | NX           |
| SMBJ100         | 100                                   | 111  | 136  | 1          | 179  | 3.4                                      | 5   | NY           |
| SMBJ100A        | 100                                   | 111  | 123  | 1          | 162  | 3.7                                      | 5   | NZ           |
| SMBJ110         | 110                                   | 122  | 149  | 1          | 196  | 3.0                                      | 5   | PD           |
| SMBJ110A        | 110                                   | 122  | 135  | 1          | 177  | 3.4                                      | 5   | PE           |
| SMBJ120         | 120                                   | 133  | 163  | 1          | 214  | 2.8                                      | 5   | PF           |
| SMBJ120A        | 120                                   | 133  | 147  | 1          | 193  | 3.1                                      | 5   | PG           |



Micro Commercial Components

SMBJ5.0(A) THRU SMBJ440(A)

**ELECTRICAL CHARACTERISTICS @25°C**

| MCC<br>PART NUMBER | REVERSE<br>STAND-OFF<br>VOLTAGE<br>$V_{WM}$<br>(VOLTS) | BREAKDOWN VOLTAGE<br>$V_{(BR)}$ @ $I_T$<br>(VOLTS) |     |            | MAXIMUM<br>CLAMPING<br>VOLTAGE @<br>$I_{PP}$<br>(VOLTS) | PEAK PULSE<br>CURRENT<br>$I_{PP}$<br>(AMPS) | MAXIMUM<br>REVERSE<br>LEAKAGE<br>@ $V_{WM}$<br>$I_D$<br>( $\mu$ A) | MARKING<br>CODE |
|--------------------|--|--|-----|------------|---|---|--|-----------------|
|                    |  | MIN  | MAX | $I_T$ (mA) |   |   |  |                 |
| SMBJ130            | 130  | 144  | 176 | 1          | 231   | 2.6   | 5  | PH              |
| SMBJ130A           | 130  | 144  | 159 | 1          | 209   | 2.9   | 5  | PK              |
| SMBJ150            | 150  | 167  | 204 | 1          | 268   | 2.2   | 5  | PL              |
| SMBJ150A           | 150  | 167  | 185 | 1          | 243   | 2.5   | 5  | PM              |
| SMBJ160            | 160  | 178  | 218 | 1          | 287   | 2.1   | 5  | PN              |
| SMBJ160A           | 160  | 178  | 197 | 1          | 259   | 2.3   | 5  | PP              |
| SMBJ170            | 170  | 189  | 231 | 1          | 304   | 2.0   | 5  | PQ              |
| SMBJ170A           | 170  | 189  | 209 | 1          | 275   | 2.2   | 5  | PR              |
| SMBJ180A           | 180  | 201  | 222 | 1          | 292   | 2.1   | 5  | PT              |
| SMBJ200A           | 200  | 224  | 247 | 1          | 324   | 1.9   | 5  | PV              |
| SMBJ220A           | 220  | 246  | 272 | 1          | 356   | 1.7   | 5  | PX              |
| SMBJ250A           | 250  | 279  | 309 | 1          | 405   | 1.5   | 5  | PZ              |
| SMBJ300A           | 300  | 335  | 371 | 1          | 486   | 1.3   | 5  | QE              |
| SMBJ350A           | 350  | 391  | 432 | 1          | 567   | 1.1   | 5  | QG              |
| SMBJ400A           | 400  | 447  | 494 | 1          | 648   | 0.9   | 5  | QK              |
| SMBJ440A           | 440  | 492  | 543 | 1          | 713   | 0.9   | 5  | QM              |

# SMBJ5.0C(A) thru SMBJ440C(A)

## Electrical Characteristics @ 25°C Unless Otherwise Specified

| MCC PART NUMBER | REVERSE STAND-OFF VOLTAGE | BREAKDOWN VOLTAGE                         |      |                     | MAXIMUM CLAMPING VOLTAGE@I <sub>PP</sub> | PEAK PULSE CURRENT     | MAXIMUM REVERSE LEAKAGE | MARKING CODE |
|-----------------|---------------------------|---|------|---------------------|--|------------------------|-------------------------|--------------|
|                 | V <sub>WM</sub>           | V <sub>(BR)</sub> @I <sub>T</sub> (VOLTS) |      |                     |  | @V <sub>WM</sub>       |                         |              |
|                 | VOLTS                     | MIN                                       | MAX  | I <sub>T</sub> (mA) | VOLTS                                    | I <sub>PP</sub> (AMPS) | I <sub>b</sub> (uA)     |              |
| SMBJ5.0C        | 5.0                       | 6.40                                      | 7.30 | 10                  | 9.6                                      | 62.5                   | 1600                    | AD           |
| SMBJ5.0CA       | 5.0                       | 6.40                                      | 7.00 | 10                  | 9.2                                      | 65.2                   | 1600                    | AE           |
| SMBJ6.0C        | 6.0                       | 6.67                                      | 8.15 | 10                  | 11.4                                     | 52.6                   | 1600                    | AF           |
| SMBJ6.0CA       | 6.0                       | 6.67                                      | 7.37 | 10                  | 10.3                                     | 58.3                   | 1600                    | AG           |
| SMBJ6.5C        | 6.5                       | 7.22                                      | 8.82 | 10                  | 12.3                                     | 48.7                   | 1000                    | AH           |
| SMBJ6.5CA       | 6.5                       | 7.22                                      | 7.98 | 10                  | 11.2                                     | 53.6                   | 1000                    | AK           |
| SMBJ7.0C        | 7.0                       | 7.78                                      | 9.51 | 10                  | 13.3                                     | 45.1                   | 400                     | AL           |
| SMBJ7.0CA       | 7.0                       | 7.78                                      | 8.60 | 10                  | 12.0                                     | 50.0                   | 400                     | AM           |
| SMBJ7.5C        | 7.5                       | 8.33                                      | 10.2 | 1                   | 14.3                                     | 42.0                   | 200                     | AN           |
| SMBJ7.5CA       | 7.5                       | 8.33                                      | 9.21 | 1                   | 12.9                                     | 46.5                   | 200                     | AP           |
| SMBJ8.0C        | 8.0                       | 8.89                                      | 10.9 | 1                   | 15.0                                     | 40.0                   | 100                     | AQ           |
| SMBJ8.0CA       | 8.0                       | 8.89                                      | 9.83 | 1                   | 13.6                                     | 44.1                   | 100                     | AR           |
| SMBJ8.5C        | 8.5                       | 9.44                                      | 11.5 | 1                   | 15.9                                     | 37.7                   | 20                      | AS           |
| SMBJ8.5CA       | 8.5                       | 9.44                                      | 10.4 | 1                   | 14.4                                     | 41.7                   | 20                      | AT           |
| SMBJ9.0C        | 9.0                       | 10.0                                      | 12.2 | 1                   | 16.9                                     | 35.5                   | 10                      | AU           |
| SMBJ9.0CA       | 9.0                       | 10.0                                      | 11.1 | 1                   | 15.4                                     | 39.0                   | 10                      | AV           |
| SMBJ10C         | 10                        | 11.1                                      | 13.6 | 1                   | 18.8                                     | 31.9                   | 5                       | AW           |
| SMBJ10CA        | 10                        | 11.1                                      | 12.3 | 1                   | 17.0                                     | 35.3                   | 5                       | AX           |
| SMBJ11C         | 11                        | 12.2                                      | 14.9 | 1                   | 20.1                                     | 29.9                   | 5                       | AY           |
| SMBJ11CA        | 11                        | 12.2                                      | 13.5 | 1                   | 18.2                                     | 33.0                   | 5                       | AZ           |
| SMBJ12C         | 12                        | 13.3                                      | 16.3 | 1                   | 22.0                                     | 27.3                   | 5                       | BD           |
| SMBJ12CA        | 12                        | 13.3                                      | 14.7 | 1                   | 19.9                                     | 30.2                   | 5                       | BE           |
| SMBJ13C         | 13                        | 14.4                                      | 17.6 | 1                   | 23.8                                     | 25.2                   | 5                       | BF           |
| SMBJ13CA        | 13                        | 14.4                                      | 15.9 | 1                   | 21.5                                     | 27.9                   | 5                       | BG           |
| SMBJ14C         | 14                        | 15.6                                      | 19.1 | 1                   | 25.8                                     | 23.3                   | 5                       | BH           |
| SMBJ14CA        | 14                        | 15.6                                      | 17.2 | 1                   | 23.2                                     | 25.8                   | 5                       | BK           |
| SMBJ15C         | 15                        | 16.7                                      | 20.4 | 1                   | 26.9                                     | 22.3                   | 5                       | BL           |
| SMBJ15CA        | 15                        | 16.7                                      | 18.5 | 1                   | 24.4                                     | 24.0                   | 5                       | BM           |
| SMBJ16C         | 16                        | 17.8                                      | 21.8 | 1                   | 28.8                                     | 20.8                   | 5                       | BN           |
| SMBJ16CA        | 16                        | 17.8                                      | 19.7 | 1                   | 26.0                                     | 23.1                   | 5                       | BP           |
| SMBJ17C         | 17                        | 18.9                                      | 23.1 | 1                   | 30.5                                     | 19.7                   | 5                       | BQ           |
| SMBJ17CA        | 17                        | 18.9                                      | 20.9 | 1                   | 27.6                                     | 21.7                   | 5                       | BR           |
| SMBJ18C         | 18                        | 20.0                                      | 24.4 | 1                   | 32.2                                     | 18.6                   | 5                       | BS           |
| SMBJ18CA        | 18                        | 20.0                                      | 22.1 | 1                   | 29.2                                     | 20.5                   | 5                       | BT           |
| SMBJ20C         | 20                        | 22.2                                      | 27.1 | 1                   | 35.8                                     | 16.7                   | 5                       | BU           |
| SMBJ20CA        | 20                        | 22.2                                      | 24.5 | 1                   | 32.4                                     | 18.5                   | 5                       | BV           |
| SMBJ22C         | 22                        | 24.4                                      | 29.8 | 1                   | 39.4                                     | 15.2                   | 5                       | BW           |
| SMBJ22CA        | 22                        | 24.4                                      | 26.9 | 1                   | 35.5                                     | 16.9                   | 5                       | BX           |
| SMBJ24C         | 24                        | 26.7                                      | 32.6 | 1                   | 43.0                                     | 14.0                   | 5                       | BY           |
| SMBJ24CA        | 24                        | 26.7                                      | 29.5 | 1                   | 38.9                                     | 15.4                   | 5                       | BZ           |
| SMBJ26C         | 26                        | 28.9                                      | 35.3 | 1                   | 46.6                                     | 12.4                   | 5                       | CD           |
| SMBJ26CA        | 26                        | 28.9                                      | 31.9 | 1                   | 42.1                                     | 14.2                   | 5                       | CE           |

# SMBJ5.0C(A) thru SMBJ440C(A)

## Electrical Characteristics @ 25°C Unless Otherwise Specified

| MCC PART NUMBER | REVERSE STAND-OFF VOLTAGE | BREAKDOWN VOLTAGE                 |      |                     | MAXIMUM CLAMPING VOLTAGE@I <sub>PP</sub> | PEAK PULSE CURRENT I <sub>PP</sub> | MAXIMUM REVERSE LEAKAGE @V <sub>WM</sub> | MARKING CODE |
|-----------------|---------------------------|-----------------------------------|------|---------------------|--|------------------------------------|--|--------------|
|                 | V <sub>WM</sub>           | V <sub>(BR)</sub> @I <sub>T</sub> |      | I <sub>T</sub> (mA) |  |                                    |  |              |
|                 | VOLTS                     | MIN                               | MAX  |                     |  |                                    |  |              |
| SMBJ28C         | 28                        | 31.1                              | 38.0 | 1                   | 50.0                                     | 12.0                               | 5  | CF           |
| SMBJ28CA        | 28                        | 31.1                              | 34.4 | 1                   | 45.4                                     | 13.2                               | 5  | CG           |
| SMBJ30C         | 30                        | 33.3                              | 40.7 | 1                   | 53.5                                     | 11.2                               | 5  | CH           |
| SMBJ30CA        | 30                        | 33.3                              | 36.8 | 1                   | 48.4                                     | 12.4                               | 5  | CK           |
| SMBJ33C         | 33                        | 36.7                              | 44.9 | 1                   | 59.0                                     | 10.2                               | 5  | CL           |
| SMBJ33CA        | 33                        | 36.7                              | 40.6 | 1                   | 53.3                                     | 11.3                               | 5  | CM           |
| SMBJ36C         | 36                        | 40.0                              | 48.9 | 1                   | 64.3                                     | 9.3                                | 5  | CN           |
| SMBJ36CA        | 36                        | 40.0                              | 44.2 | 1                   | 58.1                                     | 10.3                               | 5  | CP           |
| SMBJ40C         | 40                        | 44.4                              | 54.3 | 1                   | 71.4                                     | 8.4                                | 5  | CQ           |
| SMBJ40CA        | 40                        | 44.4                              | 49.1 | 1                   | 64.5                                     | 9.3                                | 5  | CR           |
| SMBJ43C         | 43                        | 47.8                              | 58.4 | 1                   | 76.7                                     | 7.8                                | 5  | CS           |
| SMBJ43CA        | 43                        | 47.8                              | 52.8 | 1                   | 69.4                                     | 8.6                                | 5  | CT           |
| SMBJ45C         | 45                        | 50.0                              | 61.1 | 1                   | 80.3                                     | 7.5                                | 5  | CU           |
| SMBJ45CA        | 45                        | 50.0                              | 55.3 | 1                   | 72.7                                     | 8.3                                | 5  | CV           |
| SMBJ48C         | 48                        | 53.3                              | 65.1 | 1                   | 85.5                                     | 7.0                                | 5  | CW           |
| SMBJ48CA        | 48                        | 53.3                              | 58.9 | 1                   | 77.4                                     | 7.7                                | 5  | CX           |
| SMBJ51C         | 51                        | 56.7                              | 69.3 | 1                   | 91.1                                     | 6.6                                | 5  | CY           |
| SMBJ51CA        | 51                        | 56.7                              | 62.7 | 1                   | 82.4                                     | 7.3                                | 5  | CZ           |
| SMBJ54C         | 54                        | 60.0                              | 73.3 | 1                   | 96.3                                     | 6.2                                | 5  | DD           |
| SMBJ54CA        | 54                        | 60.0                              | 66.3 | 1                   | 87.1                                     | 6.9                                | 5  | DE           |
| SMBJ58C         | 58                        | 64.4                              | 78.7 | 1                   | 103                                      | 5.8                                | 5  | DF           |
| SMBJ58CA        | 58                        | 64.4                              | 71.2 | 1                   | 93.6                                     | 6.4                                | 5  | DG           |
| SMBJ60C         | 60                        | 66.7                              | 81.5 | 1                   | 107                                      | 5.6                                | 5  | DH           |
| SMBJ60CA        | 60                        | 66.7                              | 73.7 | 1                   | 96.8                                     | 6.2                                | 5  | DK           |
| SMBJ64C         | 64                        | 71.1                              | 86.9 | 1                   | 114                                      | 5.3                                | 5  | DL           |
| SMBJ64CA        | 64                        | 71.1                              | 78.6 | 1                   | 103                                      | 5.8                                | 5  | DM           |
| SMBJ70C         | 70                        | 77.8                              | 95.1 | 1                   | 125                                      | 4.8                                | 5  | DN           |
| SMBJ70CA        | 70                        | 77.8                              | 86.0 | 1                   | 113                                      | 5.3                                | 5  | DP           |
| SMBJ75C         | 75                        | 83.3                              | 102  | 1                   | 134                                      | 4.5                                | 5  | DQ           |
| SMBJ75CA        | 75                        | 83.3                              | 92.1 | 1                   | 121                                      | 4.9                                | 5  | DR           |
| SMBJ78C         | 78                        | 86.7                              | 106  | 1                   | 139                                      | 4.3                                | 5  | DS           |
| SMBJ78CA        | 78                        | 86.7                              | 95.8 | 1                   | 126                                      | 4.7                                | 5  | DT           |
| SMBJ85C         | 85                        | 94.4                              | 115  | 1                   | 151                                      | 3.9                                | 5  | DU           |
| SMBJ85CA        | 85                        | 94.4                              | 104  | 1                   | 137                                      | 4.4                                | 5  | DV           |
| SMBJ90C         | 90                        | 100                               | 122  | 1                   | 160                                      | 3.8                                | 5  | DW           |
| SMBJ90CA        | 90                        | 100                               | 111  | 1                   | 146                                      | 4.1                                | 5  | DX           |
| SMBJ100C        | 100                       | 111                               | 136  | 1                   | 179                                      | 3.4                                | 5  | DY           |
| SMBJ100CA       | 100                       | 111                               | 123  | 1                   | 162                                      | 3.7                                | 5  | DZ           |
| SMBJ110C        | 110                       | 122                               | 149  | 1                   | 196                                      | 3.0                                | 5  | ED           |
| SMBJ110CA       | 110                       | 122                               | 135  | 1                   | 177                                      | 3.4                                | 5  | EE           |
| SMBJ120C        | 120                       | 133                               | 163  | 1                   | 214                                      | 2.8                                | 5  | EF           |
| SMBJ120CA       | 120                       | 133                               | 147  | 1                   | 193                                      | 3.1                                | 5  | EG           |

SMBJ5.0C(A) THRU SMBJ440C(A)

**ELECTRICAL CHARACTERISTICS @25°C**

| MCC<br>PART NUMBER | REVERSE<br>STAND-OFF<br>VOLTAGE<br>$V_{WM}$<br>(VOLTS) | BREAKDOWN VOLTAGE<br>$V_{(BR)}$ @ $I_T$<br>(VOLTS) |     |            | MAXIMUM<br>CLAMPING<br>VOLTAGE @<br>$I_{PP}$<br>(VOLTS) | PEAK PULSE<br>CURRENT<br>$I_{PP}$<br>(AMPS) | MAXIMUM<br>REVERSE<br>LEAKAGE<br>@ $V_{WM}$<br>$I_D$<br>( $\mu$ A) | MARKING<br>CODE |
|--------------------|--|--|-----|------------|---|---|--|-----------------|
|                    |  | MIN  | MAX | $I_T$ (mA) |   |   |  |                 |
| SMBJ130C           | 130  | 144  | 176 | 1          | 231   | 2.6   | 5  | EH              |
| SMBJ130CA          | 130  | 144  | 159 | 1          | 209   | 2.9   | 5  | EK              |
| SMBJ150C           | 150  | 167  | 204 | 1          | 268   | 2.2   | 5  | EL              |
| SMBJ150CA          | 150  | 167  | 185 | 1          | 243   | 2.5   | 5  | EM              |
| SMBJ160C           | 160  | 178  | 218 | 1          | 287   | 2.1   | 5  | EN              |
| SMBJ160CA          | 160  | 178  | 197 | 1          | 259   | 2.3   | 5  | EP              |
| SMBJ170C           | 170  | 189  | 231 | 1          | 304   | 2.0   | 5  | EQ              |
| SMBJ170CA          | 170  | 189  | 209 | 1          | 275   | 2.2   | 5  | ER              |
| SMBJ180CA          | 180  | 201  | 222 | 1          | 292   | 2.1   | 5  | ET              |
| SMBJ200CA          | 200  | 224  | 247 | 1          | 324   | 1.9   | 5  | EV              |
| SMBJ220CA          | 220  | 246  | 272 | 1          | 356   | 1.7   | 5  | EX              |
| SMBJ250CA          | 250  | 279  | 309 | 1          | 405   | 1.5   | 5  | EZ              |
| SMBJ300CA          | 300  | 335  | 371 | 1          | 486   | 1.3   | 5  | FE              |
| SMBJ350CA          | 350  | 391  | 432 | 1          | 567   | 1.1   | 5  | FG              |
| SMBJ400CA          | 400  | 447  | 494 | 1          | 648   | 0.9   | 5  | FK              |
| SMBJ440CA          | 440  | 492  | 543 | 1          | 713   | 0.9   | 5  | FM              |





Micro Commercial Components

### Ordering Information :

| Device         | Packing               |
|----------------|-----------------------|
| Part Number-TP | Tape&Reel: 3Kpcs/Reel |

**\*\*\*IMPORTANT NOTICE\*\*\***

**Micro Commercial Components Corp.** reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . **Micro Commercial Components Corp .** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp .** and all the companies whose products are represented on our website, harmless against all damages.

**\*\*\*LIFE SUPPORT\*\*\***

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

**\*\*\*CUSTOMER AWARENESS\*\*\***

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.