


UL File No.: E43149  
CSA File No.: LR26550

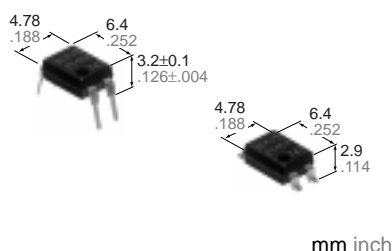

## FEATURES

**1. Reinforced insulation 5,000 V type**  
More than 0.4 mm internal insulation distance between inputs and outputs. Conforms to EN41003, EN60950 (reinforced insulation).

### 2. Compact 4-pin DIP size

The device comes in a compact (W)6.4 × (L)4.78 × (H) 3.2mm (W).252 × (L).188 × (H).126inch, 4-pin DIP size

### 3. Controls low-level analog signals

PhotoMOS relays feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.

### 4. High sensitivity, low ON resistance

Can control a maximum 0.13 A load current with a 5 mA input current. Low ON

resistance of 25Ω (AQY210EH). Stable operation because there are no metallic contact parts.

### 5. Low-level off state leakage current

The SSR has an off state leakage current of several milliamperes, whereas the PhotoMOS relay has only 100 pA even with the rated load voltage of 350 V (AQY210EH).

## TYPICAL APPLICATIONS

- Modem
- Telephone equipment
- Security equipment
- Sensors

## TYPES

Type	I/O isolation voltage	Output rating*		Part No.				Packing quantity	
				Through hole terminal	Surface-mount terminal				
		Load voltage	Load current		Tube packing style	Tape and reel packing style		Tube	Tape and reel
						Picked from the 1/2-pin side	Picked from the 3/4-pin side		
AC/DC type	Reinforced 5,000 V	350 V	130 mA	AQY210EH	AQY210EHA	AQY210EHAX	AQY210EHAZ	1 tube contains 100 pcs.	1,000 pcs.
		400 V	120 mA	AQY214EH	AQY214EHA	AQY214EHAX	AQY214EHAZ	1 batch contains 1,000 pcs.	

\*Indicate the peak AC and DC values.

Note: For space reasons, the initial letters of the product number "AQY", the SMD terminal shape indicator "A" and the package type indicator "X" and "Z" are omitted from the seal.

## RATING

### 1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	AQY210EH(A)	AQY214EH(A)	Remarks
Input	LED forward current	I <sub>F</sub>	50 mA		
	LED reverse voltage	V <sub>R</sub>	3 V		
	Peak forward current	I <sub>FP</sub>	1 A		f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P <sub>in</sub>	75 mW		
Output	Load voltage (peak AC)	V <sub>L</sub>	350 V	400 V	
	Continuous load current	I <sub>L</sub>	0.13 A	0.12 A	
	Peak load current	I <sub>peak</sub>	0.4 A	0.3 A	100 ms, (1 shot), V <sub>L</sub> = DC
	Power dissipation	P <sub>out</sub>	500 mW		
Total power dissipation		P <sub>T</sub>	550 mW		
I/O isolation voltage		V <sub>iso</sub>	5,000 V AC		
Temperature limits	Operating	T <sub>opr</sub>	-20 to +85°C -4 to +185°F		Non-condensing at low temperatures
	Storage	T <sub>stg</sub>	-40 to +100°C -40 to +212°F		

2. Electrical characteristics (Ambient temperature: 25°C 77°F)


Item			Sym-bol	AQY210EH(A)	AQY214 EH(A)	Condition
Input	LED operate current	Minimum Typical Maximum	I <sub>Fon</sub>	1.2 mA 3.0 mA		I <sub>L</sub> = Max.
	LED turn off current	Minimum Typical Maximum	I <sub>Foff</sub>	0.4 mA 1.1 mA		I <sub>L</sub> = Max.
	LED dropout voltage	Minimum Typical Maximum	V <sub>F</sub>	1.14 V (1.25 V at I <sub>F</sub> = 50 mA) 1.5 V		I <sub>F</sub> = 5 mA
Output	On resistance	Minimum Typical Maximum	R <sub>on</sub>	18 Ω 25 Ω	26 Ω 35 Ω	I <sub>F</sub> = 5 mA I <sub>L</sub> = Max. Within 1 s on time
	Off state leakage current	Minimum Typical Maximum	I <sub>Leak</sub>	1 μA		I <sub>F</sub> = 0 V <sub>L</sub> = Max.
Transfer characteristics	Turn on time*	Minimum Typical Maximum	T <sub>on</sub>	0.5 ms 2.0 ms		I <sub>F</sub> = 5 mA I <sub>L</sub> = Max.
	Turn off time*	Minimum Typical Maximum	T <sub>off</sub>	0.08 ms 1.0 ms		I <sub>F</sub> = 5 mA I <sub>L</sub> = Max.
	I/O capacitance	Minimum Typical Maximum	C <sub>iso</sub>	0.8 pF 1.5 pF		f = 1 MHz V <sub>B</sub> = 0
	Initial I/O isolation resistance	Minimum Typical Maximum	R <sub>iso</sub>	1,000 MΩ		500 V DC

Note: Recommendable LED forward current I<sub>F</sub> = 5 to 10 mA.

For type of connection, see Page 29


- For Dimensions
- For Schematic and Wiring Diagrams
- For Cautions for Use

\*Turn on/Turn off time

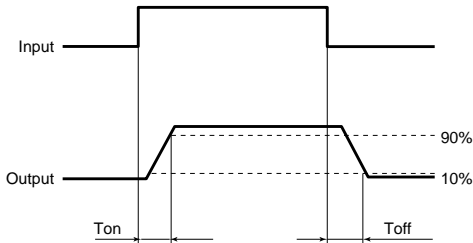


REFERENCE DATA


1. Load current vs. ambient temperature characteristics  
Allowable ambient temperature: -20°C to +85°C  
-4°F to +185°F

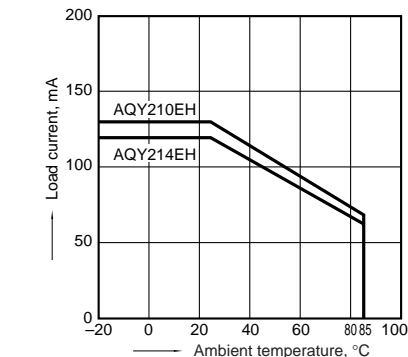

2. On resistance vs. ambient temperature characteristics  
Measured portion: between terminals 3 and 4;  
LED current: 5 mA; Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

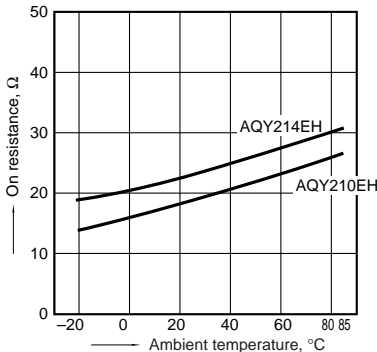


3. Turn on time vs. ambient temperature characteristics  
Sample: All types  
LED current: 5 mA; Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

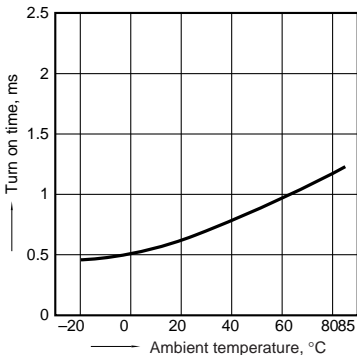


#### 4. Turn off time vs. ambient temperature characteristics

Sample: All types; LED current: 5 mA; Load voltage: Max. (DC); Continuous load current: Max. (DC)

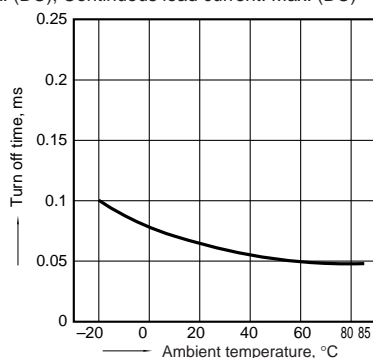


#### 5. LED operate current vs. ambient temperature characteristics

Sample: All types; Load voltage: Max. (DC); Continuous load current: Max. (DC)

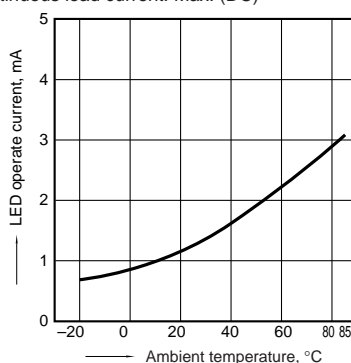


#### 6. LED turn off current vs. ambient temperature characteristics

Sample: All types; Load voltage: Max. (DC); Continuous load current: Max. (DC)

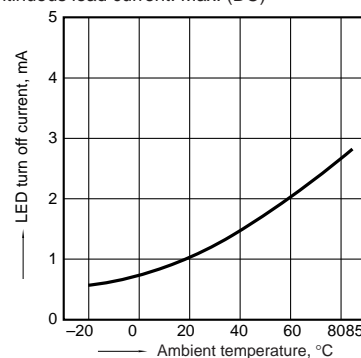


#### 7. LED dropout voltage vs. ambient temperature characteristics

Sample: All types; LED current: 5 to 50 mA

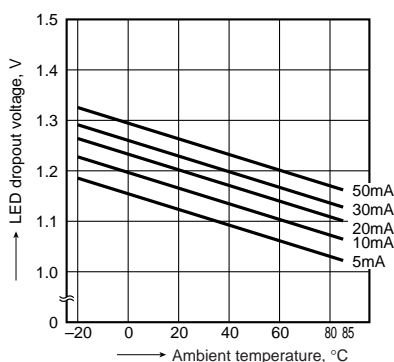


#### 8. Voltage vs. current characteristics of output at MOS portion

Measured portion: between terminals 3 and 4; Ambient temperature: 25°C 77°F




#### 9. Off state leakage current

Measured portion: between terminals 3 and 4; Ambient temperature: 25°C 77°F

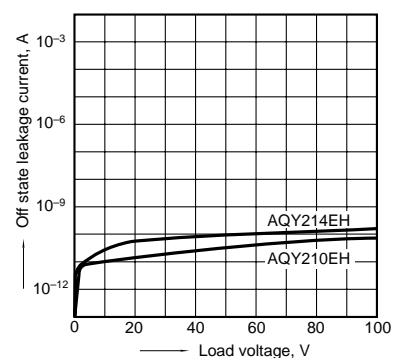


#### 10. LED forward current vs. turn on time characteristics

Sample: All types; Measured portion: between terminals 3 and 4; Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

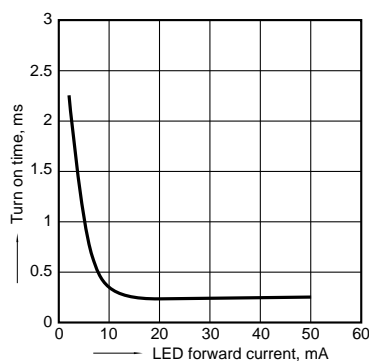

#### 11. LED forward current vs. turn off time characteristics

Sample: All types; Measured portion: between terminals 3 and 4; Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

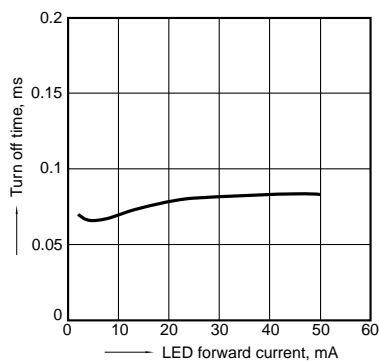

#### 12. Applied voltage vs. output capacitance characteristics

Sample: All types; Measured portion: between terminals 3 and 4; Frequency: 1 MHz; Ambient temperature: 25°C 77°F

