

LINEAR TECHNOLOGY MILITARY PRODUCTS/ PROGRAMS

Linear Technology Corporation (LTC) offers a comprehensive range of high performance analog/linear integrated circuits including; Data Converters, Interface devices, High Speed Amplifiers, Precision Operational Amplifiers, Comparators, Voltage References, DC-DC Converters, Switches, Voltage Regulators, Switching Regulators, PWMs, Switched Capacitor Filters and other special function products serving the rigorous demands of the military marketplace.

The Company's specification system, quality procedures and policies were set up from the beginning to meet the exacting demands of MIL-Q-9858 (Quality Program Requirements), MIL-I-45208 (Inspection System Requirements), MIL-PRF-38535 (General Specification for Microcircuits), MIL-STD-976 (Certification Requirements for Microcircuits), MIL-STD-883 (Test Methods and Procedures for Microelectronics) and more recently the ISO 9000 (Internal Standards for Quality Management).

In addition, the Company has introduced a line of radiation tolerant devices which are offered with two different inhouse levels of enhanced reliability processing to serve ground, air and/or space applications, including customer generated Source Controlled Drawings (SCDs) for a variety of missions.

Some of these specifications are no longer active, however the standards set in the early days of the military business are still met or exceeded by Linear Technology today.

LTC's military programs include:

- JAN Class S
- JAN Class B
- Standard Microcircuit Drawings (SMDs)
- 883
- Hi-Rel (SCDs)
- LTC "RH", Class "S" devices processed using proprietary radiation hardening

LTC JAN

At the end of 1969, the Solid State Applications Branch of the Rome Air Development Center (RADC) issued the first copy of MIL-M-38510. This general specification for microcircuits established the procedures that a manufacturer must follow to have products listed on the Qualified Parts List (QPL).

One major problem faced by defense contractors using semiconductor devices was the inability to interchange devices caused by a proliferation of non-standard electrical specifications. The 38510 (JAN) program addressed this problem by publishing detailed electrical specifications (slash sheets) for each component to be listed on the QPL.

Class S JAN devices are completely processed in the United States and all wafer fabrication, wafer sort, assembly, testing, and conformance testing are performed onshore. Class B JAN may be assembled and/or tested offshore by qualified subcontractors or other Linear Technology divisions.

In August 1984, LTC was visited by a team of Defense Electronics Supply Center (DESC) personnel. This team spent almost four days auditing LTC and at the end of the visit they awarded the Company "Class B Line Certification." This was a first for any company to receive this distinction on their first audit!

In early 1985, LTC joined the ranks of the eighteen existing QPL suppliers. Of these eighteen, only a handful of suppliers participate in the linear military JAN market. LTC believes its analog design experience and manufacturing strength has and will continue to make significant contributions to this market.

LTC's first QPL listing was achieved in February 1985, one year after the Company made JAN Class B a corporate goal. Other companies have typically taken 2 to 3 years to achieve this status. The line certification and QPL approvals



were awarded to MIL-M-38510 and MIL-STD-883 specifications. Since that time the Company has been reaudited to the latest revisions of these specifications and has maintained an uninterrupted certification record for the manufacture of JAN QPL products.

In November 1987, LTC was audited by a team from DESC, Naval Weapons Support Center and Aerospace Corporation and was awarded "Class S Line Certification."

LTC 's policy of providing JAN linear components supports the United States Government's position of standardization to decrease the number of active part types maintained by DESC. This number is currently in excess of 85,000 for all types of components (contrasted to approximately 8,000 industry standard components). Standardization will clearly decrease costs and assist in the maintenance of military weapons systems and equipment now in the field.

LTC maintains its JAN product offerings under the current revision of MIL-PRF-38535, Appendix A. LTC now offers 45 products listed as Class B Qualified Parts and 40 products as Class S Qualified Parts on the QML products listing – QML-38535. To receive an updated copy of LTC's current JAN QPL product offering, contact your local LTC sales office or LTC Military Marketing.

For JAN Flows see Figure 1 and Figure 2.

In June 1994, LTC was granted transitional Qualified Manufacturers List (QML) certification to MIL-PRF-38535 by DESC, and will be pursuing full QML certification. A full QML Validation audit of our Milpitas facility was held in November of 1997 with representatives from DSCC (Defense Supply Center, Columbus), Navy-Crane, and Aerospace Corporation auditing our Milpitas facility. This certification as a QML (Qualified Manufacturing Line) supplier covers LTC's design centers, both onshore and offshore manufacturing and test facilities and assembly subcontractors.

LTC Standard Military Drawings

DESC drawings were initiated in 1976 to standardize the electrical requirements for full temperature-tested military components. These DESC drawings (or minispecs) were initially issued for low power Schottky devices (54LS) used by defense subcontractors on the Air Force's F16. The program accomplished standardization of testing, without the delays associated with the qualification process for JAN components.


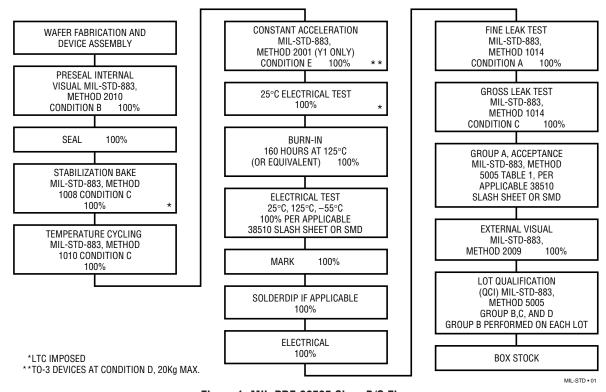


Figure 1. MIL-PRF-38535 Class B/Q Flow

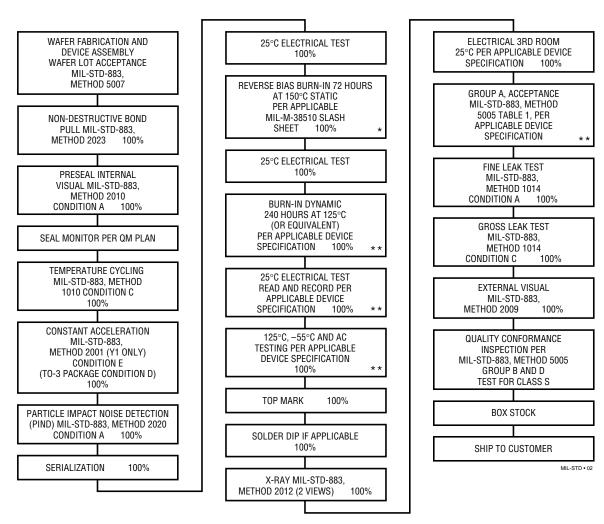

- * IN THE CASE WHERE THERE IS NO APPLICABLE MIL-M38510 SLASH SHEET, THE BURN-IN SCHEMATIC AS WELL AS THE APPLICABILITY OF 100% DYNAMIC BURN-IN SHALL BE NEGOTIATED BETWEEN THE CUSTOMER AND LINEAR TECHNOLOGY CORPORATION.
- ** APPLICABLE DEVICE SPECIFICATION SHALL BE THE 38510 SLASH SHEET, SMD, OR A DEVICE SPECIFICATION AGREED UPON BETWEEN THE CUSTOMER AND LINEAR TECHNOLOGY CORPORATION.

NOTE: CUSTOMER SOURCE INSPECTION WILL BE ADDED AS SPECIFIED IN CUSTOMER'S PURCHASE ORDER. GOVERNMENT SOURCE INSPECTION IS BY LETTER OF DELEGATION RETWEEN CUSTOMER AND DCMC

Figure 2. MIL-PRF-38535 Class S/V Flow

The DESC drawing was viewed as a preliminary specification prior to JAN approval, and it ranks second in the order of purchasing hierarchy to JAN. This order is defined in Requirement 64 of MIL-STD-454. If a JAN part is available, it is still preferred, however, there are many types of devices where the volume is such that the cost of a full JAN qualification may not be justified, but where a need exists for electrical standardization.

CMOS and analog circuits were added to the DESC Drawing Program in 1977, 1978 and 1979, but widespread acceptance of these parts was not achieved. Today with more emphasis being placed on standardization, the interest level in DESC drawings has accelerated. This category

of product can be built offshore with 883-level processing and the electrical parameters are tested specifically to the DESC drawing.

In 1986 a new program named Standard Military Drawings (SMDs) was launched by DESC. This replaced the previous DESC Drawing Program. This new program is aimed directly at standardizing electrical requirements with the objective to decrease the time required to issue military drawings. Both DESC and the SMDs changed names in 1996 to DSCC (Defense Supply Center, Columbus) and Standard *Microcircuit* Drawings, respectively. These changes are part of the movement to streamline and



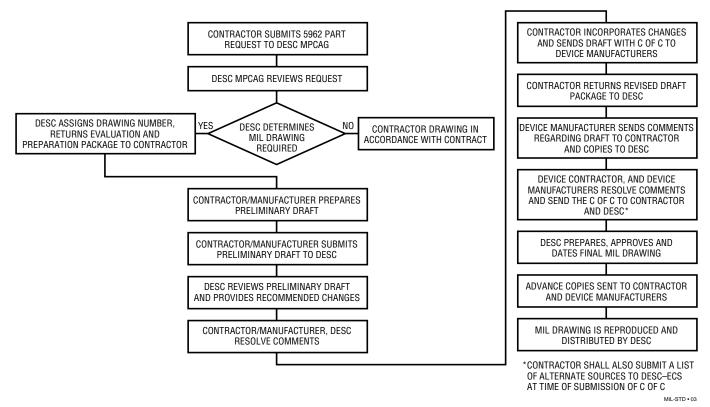


Figure 3. SMD Preparation Flowchart

combine government qualification agencies and procedures in the spirit of QML. QML (MIL-PRF-38535) sets forth the idea that we know our product and customers best and have systems in place and functional that will consistently produce reliable parts. Additionally, we will strive for continuous product and manufacturing improvements that will best serve our customers' needs, including timely delivery of quality products. To achieve real time introduction of new SMD product, we have set up a computer link with the SMD engineering group at DSCC. LTC is actively supporting the SMD program and with QML certification, LTC enters the next generation of SMDs. Class N for Non-traditional, a new category of plastic devices that will be processed with LTC's own standard plastics flow and electricals, and manufactured on lines that have proven controls and track records.

LTC has over 134 hermetic devices listed on DESC and Mil drawings, and we are actively supporting these standardization programs by having parts available off the shelf from LTC and from distribution outlets. Class N SMDs will be negotiated as needed with LTC's customers for plastic products.

For SMD Preparation Flow see Figure 3.

SMDs Get A New Part Numbering System

The numbering system to standardize the part numbers for JAN 38510 and SMD (Standard Microcircuit Drawing) products follows.

The SMD number $5962\text{-}XXXXXZZ(_)YY$ will be used, with a minor change for the 38535 + QML qual'd devices. This makes one part have one part number with just the grade identification being different (M = 883, B = JAN B, S = JAN S, Q = level B SMD, V = level S SMD, and N = Non-traditional (plastic)). An example of this follows:

Old System

LTC PART NUMBER	"OLD" SMD NO.	JAN PART NUMBER
LT1021CMH-5/883	5962-8876202GA	JM38510/12407BGA

New System

LTC PART NUMBER	"NEW" SMD ONE PART NUMBER SYSTEM
LT1021CMH-5/883	5962-8876202(M, B, S, Q, V, or N)GA



This was implemented on January 1, 1990, for all SMDs and slash sheets created after this date. Devices listed or approved in the past may retain their respective existing part numbers.

LTC MIL-STD-883 Product

On December 31, 1984, a key clause was added to MIL-STD-883, paragraph 1.2.1. It was a way of pointing to compliant non-JAN product and require the standards of processing required in the QPL program (JAN). It made a direct link from Class M (or /883) devices to MIL-M-38510, and by that link to MIL-PRF-38535, Appendix A.

As Linear Technology moves into the QML arena, we are allowed by DSCC to look seriously at streamlining flows, eliminating non-value added testing, and doing the "best commercial practices" available in order to continuously improve our products and delivery, while reducing handling and costs. Although MIL-STD-883 stands without equal as a specification for test methods, it also locks us into compliance with Appendix A of MIL-PRF-38535 rather than the body of the specification which allows us to respond in a timely manner to technology changes and improved processes.

As data is gathered in support of these changes, it is presented to our in-house TRB (Technical Review Board) for review and approval. On QML products the top mark changes from ".../883" plus compliant "C" to marking that includes "Q" to show that the product is coming from a fully qualified QML line.

Table 1. LTC 883 Group A Sampling Plan

		883			
TEST	CONDITION	SAMPLE SIZE	ACCEPT		
DC Parametric	T _A = 25°C	116	0		
DC Parametric	$T_A = -55^{\circ}C$	116	0		
	+125°C	116	0		
AC Parametric	T _A = 25°C	116	0		

LTC Hi-Rel (SCDs)

LTC recognizes the need for Source Controlled Drawings (SCDs) and the Company's DSCC-certified line is well equipped to handle these requirements for space and

hi-rel applications. The Company has a comprehensive specification review procedure and emphasis is placed on compliance to test methods and procedures. Over 8,000 specifications have been reviewed to date with fast feedback to our customers.

LTC has serviced SCD orders including "S" level specifications with an emphasis on compliance with customer purchase order requirements and on-time delivery performance. A dedicated SL traveller is initiated to baseline the manufacturing and test flow requirements to service each order.

LTC's Product Marketing Group can provide you with more details on a case-by-case basis.


LTC's Radiation Hardness Program

LTC has developed a proprietary design/wafer fabrication process and has introduced a family of RAD HARD (RH prefix) products to support space level applications. The wafer lot acceptance, packaging, test, burn-in, radiation hardness testing, quality assurance and data sheet requirements are specified in a product specific LTC generic RH drawing. Each generic RH specification is complemented with product specific test travellers which detail the test, burn-in and processing requirements for each package type and electrical grade.

Each RH data sheet specifies the end point electrical test requirements for Total Dose Irradiation testing performed on a sample basis. The radiation sample is typically comprised of a minimum of two wafers per wafer run with total dose irradiation provided by a Cobalt 60 source at a dose of approximately 20 rads/sec. For guaranteed radiation levels, total dose radiation testing at an outside certified test lab is offered as an option.

Due to the unique wafer processing required to make RH products, the RH products are not totally compliant with all the Class S requirements of MIL-STD-883. Since MIL-STD-883 specifically prohibits the marking of noncompliant products with the 883 compliance (C) indicator, LTC's RH products are marked with the LTC RH prefix part number or with a special mark specified by the customer.



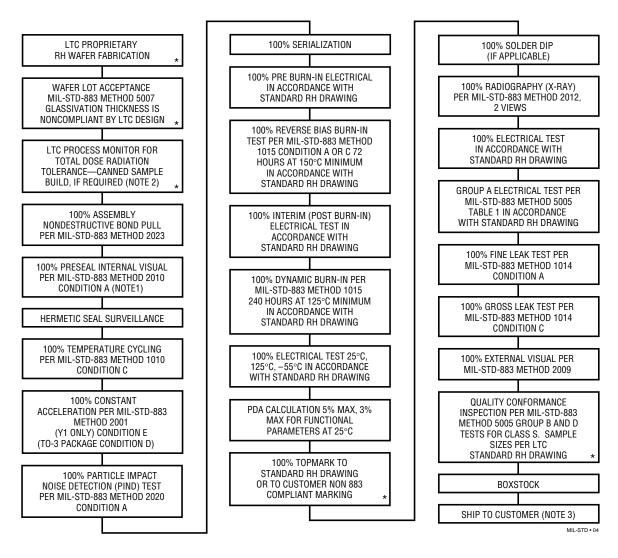

- NOTE: 1. SOURCE INSPECTION AT PRE-SEAL INTERNAL VISUAL IS STANDARD.
 - FOR GUARANTEED RADIATION LEVELS, OUTSIDE LAB CHARGES WILL APPLY FOR SAMPLES TO MIL-STD-883, TEST METHOD 1019, TOTAL DOSE IRRADIATION.
 - 3. CUSTOMER SOURCE INSPECTION CAN BE ADDED AT FINAL SHIPMENT PER P.O.
 - * DENOTES PROCESS STEPS THAT ARE NONCOMPLIANT TO THE CLASS S REQUIREMENTS OF MIL-STD-883.

Figure 4. LTC Standard "RH" Packaged Product Flowchart

Military Market Commitment

LTC is a focused, dedicated company servicing the needs of the linear military marketplace. We are shipping to the top U.S. defense electronics contractors who have qualified

and approved our products. LTC is committed to being the best and most proficient high quality supplier of analog military components.

883 CERTIFICATE OF CONFORMANCE — LEVEL B

LTC Part Number			QUALITY ASSURANCE INSPECTOR
Lot Traceability No		DATE	SIGNATURE
Purchase Order No			
Customer Name	P/N _		Qty
Date Code	Shipper #		Traveller Lot #
Group A =	Group B =	Group C =	Group D =
Group B/3 Re-Inspection [Date, If Applicable		

LINEAR TECHNOLOGY CORPORATION HEREBY DECLARES THAT THE COMPONENTS SPECIFIED ON THE ABOVE PURCHASE ORDER COMPLY WITH YOUR SPECIFICATIONS AND REQUIREMENTS OF MIL-STD-883. ALL SUPPORTING DOCUMENTATION AND RECORDS ARE RETAINED ON FILE BY LTC AND ARE AVAILABLE FOR INSPECTION. THE MAJOR ELEMENTS OF THE 883 PROGRAM ARE SHOWN BELOW.

Operation Screening Procedure MIL-STD-883, Method 5004

Internal Visual Method 2010, Condition B

Method 1010, Condition C, 10 cycles -65°C to 150°C Temperature Cycling

Constant Acceleration Method 2001, Condition E, 30k g Y1 axis (TO-3 PKG Condition D at 20k g) EXAMPLE

Fine Leak Method 1014. Condition A Gross Leak Method 1014, Condition C

Method 1015, 160 hrs at 125°C (or equivalent) Burn-in +25°C DC (per LTC Data Sheet) PDA = 5% Final Electrical

+125°C or 150°C DC

-55°C DC +25°C AC

Method 5005 Group A (sample/lot) QA Acceptance **Quality Conformance**

Group B (sample/lot)

Group C (sample every 3 months/Process Technology) Group D (sample every 6 months/Package Family)

External Visual Method 2009

NOTE: Each operation is performed on a 100% basis unless otherwise stated.

FORM No. 00-03-6072

LINEAR TECHNOLOGY CORPORATION 1630 McCarthy Blvd. Milpitas, CA 95035-7487



MILITARY PRODUCTS

LINEAR TECHNOLOGY CORPORATION 1630 McCarthy Blvd. Milpitas, CA 95035-7487

GROUP A DATAMil-Std-883, METHOD 5005

LTC P/N:	LOT #:	
GENERIC TYPE:	PKG:	DATE CODE:
ASSEMBLY LOC:		

	ACC	S/S	#	DATE	OPER
	#	0,0	FAILED	TESTED	NUMBER
SUBGROUP 1					
Static tests at 25°C	0	116			
SUBGROUP 2 Static tests at maximum rated operating temperature	0	116			
SUBGROUP 3 Static tests at minimum rated operating temperature	0	116			
SUBGROUP 4 Dynamic tests at 25°C	0	116			
SUBGROUP 5 Dynamic tests at maximum rated operating temperature	0	116		al E	
SUBGROUP 6 Dynamic tests at minimum rated operating temperature	0	116	XAM		
SUBGROUP 7 Functional tests at 25°C	0	116	'		
SUBGROUP 8 Functional tests at maximum and minimum operating temperature	0	116			
SUBGROUP 9 Switching tests at 25°C	0	116			
SUBGROUP 10 Switching tests at maximum rated operating temperature	0	116			
SUBGROUP 11 Switching tests at minimum rated operating temperature	0	116			

QA ALLINOVAL. DATE.	QA APPROVAL:	DATE:
---------------------	--------------	-------

FORM No. 00-03-6037



LINEAR TECHNOLOGY CORPORATION 1630 McCarthy Blvd. Milpitas, CA 95035-7487

GROUP B DATA (Class B) Mil-Std-883, METHOD 5005

		LOT #:						
GENERIC TYPE: ASSEMBLY LOC:					_ DATE	CODE:		
TEST	METHOD	CONDITION	SAMPLE SIZE SERIES	ACC #	S/S	# FAILED	DATE TESTED	
SUBGROUP 2 Resistance to Solvents	2015			0	3	~ N'	PV	
SUBGROUP 3 Solderability	2003	Soldering Temp. of 245°C ± 5°C	10	0	*	AM		
SUBGROUP 5 Bond Strength	2011	C or D	15	0				
			QA APF	ROVAL:		D/	ATE:	
			QA APF	PROVAL:		D/	ATE:	
			QA APF	PROVAL:		D/		
AD TECHNOLOGY COD	DODATION		QA APF	PROVAL:		D <i>i</i>		
EAR TECHNOLOGY COR D McCarthy Blvd. itas, CA 95035-7487	PORATION		QA APF	PROVAL:		D <i>i</i>		
O McCarthy Blvd.	PORATION	GROUP C DAT Mil-Std-883, ME	ΓA (Class	В)		D <i>i</i>		
O McCarthy Blvd.		Mil-Std-883, ME LOT #:	Γ Α (Class ETHOD 50	B) 005	_	D/		

TEST	METHOD	CONDITION	SAMPLE SIZE SERIES	ACC #	S/S	# FAILED	DATE OPER
SUBGROUP 1 Steady State Life Test	1005	T _A = 125°C (1000 Hours or Equiv.)	5	0	45	7M	
Electrical Endpoints		Test #		K			

QA APPROVAL:	DATE:

FORM No. 00-03-6007



MILITARY PRODUCTS

LINEAR TECHNOLOGY CORPORATION 1630 McCarthy Blvd. Milpitas, CA 95035-7487

GROUP B DATA (Class S) Mil-Std-883, METHOD 5005

LTC P/N:	LOT #:	
GENERIC TYPE:	PKG:	DATE CODE:
ASSEMBLY LOC:		

TEST	METHOD	CONDITION	SAMPLE SIZE SERIES	ACC #	S/S	# FAILED	DATE TESTED	OPER #
SUBGROUP 1 Physical Dimensions Internal Water-Vapor Content	2016 1018	5000 ppm Max						
SUBGROUP 2 Resistance to Solvents Internal Visual and Mechanical Bond Strength Die Shear Test	2015 2013, 2014 2011 2019	Design and Construction Requirements C or D	10	0 0 0	3 2 22 Wires 3			
SUBGROUP 3 Solderability	2003 or 2022	Soldering Temp. of 245°C ±5°C	10	0	22 Leads		_, {	
SUBGROUP 4 Lead Integrity Seal Fine Gross	2004 1014	B ₂ (Lead Fatigue)	5	0	45 Leads	M	PLS	
SUBGROUP 5 Electrical End-Points Steady State Life Electrical End-Points	1005	Glass Frit Seal Only Test # C, D, or E Test #	5	0	45			
SUBGROUP 6 Electrical End-Points Temperature Cycling Constant Acceleration Seal Fine Gross Electrical End-Points	1010 2001 1014	Test # C 100 Cycles E Y ₁ Only (TO-3 at Condition D, 20Kg) Test #	15	0	15			
SUBGROUP 7 ESD Classification	3015	Qual or Re-Design Only	15	N/A	_			

QA APPROVAL: DATE:



LINEAR TECHNOLOGY CORPORATION 1630 McCarthy Blvd. Milpitas, CA 95035-7487

GROUP D DATA (Class B or S) Mil-Std-883, METHOD 5005

LTC P/N:	LOT #:	
GENERIC TYPE:	PKG:	DATE CODE:
ASSEMBLY LOC:		

TEST	METHOD	CONDITION	SAMPLE SIZE SERIES	ACC #	S/S	# FAILED	DATE TESTED	OPER #
SUBGROUP 1 Physical Dimensions	2016		15	0	15			
	2010		_	_				
SUBGROUP 2	0004	D // F-ti	5	0	45 Leads			
Lead Integrity	2004	B ₂ (Lead Fatigue)						
Fine Leak	1014							
Gross Leak	1014							
SUBGROUP 3			15	0	15			
Thermal Shock	1011	B Min. 15 Cycles						
Temperature Cycle	1010	C 100 Cycles						
Moisture Resistance	1004							
Fine Leak	1014							
Gross Leak	1014							
Visual Examination	1004/						_	
	1010							
Electrical End-Points		Test #				1PI		
SUBGROUP 4			15	0	15	101		
Mechanical Shock	2002	В			_ 1	VZ ,		
Vibration, Variable	2007	A		. 1				
Frequency				Y	The second secon			
Constant Acceleration	2001	E Y1 Only		• .				
Fine Leak	1014	(TO 0 .						
Gross Leak	1014	(TO-3 at						
Visual Examination	1010/ 1011	Condition D, 20Kg)						
Electrical End-Points	1011	Test #						
		1631#			4.5	4.5		
SUBGROUP 5	4000	٨		0	15	15		
Salt Atmosphere	1009	A						
Fine Leak Gross Leak	1014 1014							
Visual Examination	1014	Visual Criteria						
	1009	visuai Ciliella						
SUBGROUP 6	4040	5000		0	3			
Internal Water-Vapor	1018	5000 ppm Max						
SUBGROUP 7			15	0	15			
Adhesion of Lead Finish	2025							
SUBGROUP 8				0	5			
Lid Torque	2024	Glass Frit Seal Only						

QA APPROVAL:	 DATE:	



12-13

Military Parts List

		ы	

JM38510/10103SGA (LM101AH) JM38510/10103SHA (LM101AW) JM38510/10103SPA (LM101AJ8) JM38510/10104SGA (LM108AJ) JM38510/10104SGA (LM108AH) JM38510/10104SPA (LM108AW) JM38510/10104SPA (LM108AJ8) JM38510/10107SGA (LM118H) JM38510/10304SGA (LM11H) JM38510/10306SCA (LM119J) JM38510/10306SIA (LM119H) JM38510/10306SHA (LM119W) JM38510/10307SCA (LT119AJ) JM38510/10307SIA (LT119AH) JM38510/10307SIA (LT119AW) JM38510/11401SPA (LF155J8) JM38510/11402SGA (LF156H) JM38510/11402SPA (LF156J8) JM38510/11404SPA (LF155AH) JM38510/11404SPA (LF155AJ8) JM38510/11405SPA (LF156AH) JM38510/11405SPA (LF156AJ8) JM38510/11703SYA (LM117H) JM38510/11704SYA (LM117K) JM38510/11803SXA (LM137H) JM38510/11804SYA (LM137K) JM38510/12407SGA (LT1021BMH-5H) JM38510/12408SGA (LT1021BMH-7H) JM38510/12409SGA (LT1021BMH-10H) JM38510/12501SGA (LF198H) JM38510/13502SPA (OP07H) JM38510/13502SPA (OP07J8) JM38510/14802SXA (LT1009H)

JAN B QPL

JM38510/10103BCA (LM101AJ) JM38510/10103BCA (LM101AH) JM38510/10103BPA (LM101AW) JM38510/10103BPA (LM101AJ) JM38510/10104BCA (LM108AJ) JM38510/10104BCA (LM108AH) JM38510/10104BPA (LM108AJ) JM38510/10106BCA (LM108AJ) JM38510/10107BCA (LM118J) JM38510/10107BCA (LM118J) JM38510/10107BCA (LM118H) JM38510/10107BPA (LM118J8) JM38510/10304B6A (LM111H) JM38510/10306BIA (LM119H) JM38510/10306BCA (LM119J) JM38510/10306BHA (LM119W) JM38510/10307BCA (LT119AJ) JM38510/10307BHA (LT119AH) JM38510/10307BHA (LT115H) JM38510/11401BGA (LF155H) JM38510/11401BGA (LF156J8) JM38510/11402BGA (LF156H) JM38510/11402BHA (LF156W) JM38510/11402BPA (LF156JB) JM38510/11404BGA (LF155AH) JM38510/11404BPA (LF155AH) JM38510/11405BGA (LF156AH) JM38510/11405BHA (LF156W) JM38510/11405BHA (LF156W) JM38510/11703BXA (LM117H) JM38510/11703BXA (LM117H) JM38510/11706BYA (LM138K) JM38510/11803BXA (LM137K) JM38510/11804BYA (LM137K) JM38510/12407BGA (LT1021BMH-5H) JM38510/12408BGA (LT1021BMH-7H) JM38510/12409BGA (LT1021BMH-10H) JM38510/12501BGA (DP07H) JM38510/13502BPA (OP07H) JM38510/13502BPA (OP07J8) JM38510/14802BXA (LT1009H)

DESC Drawings

7703401XA (LM117H) 7703401YA (LM117K) 7703402XA (LM117HVH) 7703402YA (LM137H) 7703403XA (LM137H) 7703403YA (LM137HVH) 7703404XA (LM137HVH) 7703404YA (LM137HVH) 7703405XA (LT117AH) 7703405YA (LT117AK) 7703406XA (LT137AH) 7703406YA (LT137AK) 7703407XA (LT117AHVK) 7703407YA (LT117AHVK) 7703408XA (LT137AHVK) 7703408YA (LT137AHVK) 8203602GA (0P07H) 8203602PA (0P07J8) 8418001XA (LM136AH-2.5) 8551401GA (REF02AH) 8551401PA (REF02AJ8) 8600801EA (LT685) 8601401CA (LM119J) 8601401HA (LM119W) 8601401IA (LM119H) 8601402CA (LT119AJ) 8601402HA (LT119AW) 8601402IA (LT119AH) 8687702XA (LT111AH) 8687702YA (LT111AJ8)

Standard Military Drawings (SMD)

5962-3870701MGA (LTC1044MH) 5962-3870701MPA (LTC1044MJ) 5962-8680601EA (LT1846J) 5962-8680602EA (LT1847J) 5962-8684501IA (LT1016MH) 5962-8684501PA (LT1016MJ8) 5962-8686101XA (LT580SH) 5962-8686102XA (LT580TH) 5962-8686103XA (LT580UH) 5962-8687701GA (LT111AH) 5962-8687701PA (LT111AJ8) 5962-8688201XA (LH0070-0H) 5962-8688202XA (LH0070-1H) 5962-8688203XA (LH0070-2H) 5962-8757801GA (LT1007AMH) 5962-8757801PA (LT1007AMJ8) 5962-8759401XA (LM185H-1.2) 5962-8759402XA (LM185H-2.5) 5962-8760401GA (LM10H) 5962-8760401PA (LM10J8) 5962-8766601VA (LT1080MJ) 5962-8766602EA (LT1081MJ) 5962-8767501XA (LM150K) 5962-8767502XA (LT150AK) 5962-8771501CA (LT1002AMJ) 5962-8773801GA (LT1001MH) 5962-8773801PA (LT1001MJ8) 5962-8773803GA (LT1001AMH) 5962-8773803PA (LT1001AMJ) 5962-8774101XA (LT1033MK) 5962-8777501YA (LM123K) 5962-8777502YA (LM123AK) 5962-8853701GA (OP37AH) 5962-8853701PA (OP37AJ8) 5962-8853702GA (OP37BH) 5962-8853702PA (0P37BJ8) 5962-8853703GA (0P37CH) 5962-8853703PA (0P37CJ8) 5962-8856101XA (LM199AH) 5962-8856102XA (LM199H) 5962-8856201XA (LT1010MH) 5962-8856201YA (LT1010MK) 5962-8856701GA (LT1037AMH) 5962-8856701PA (LT1037AMJ8) 5962-8859701XA (LT1004MH-1.2) 5962-8859702XA (LT1004MH-2.5) 5962-8860001GA (LT1021BMH-10) 5962-8860002GA (LT1021CMH-10) 5962-8860003GA (LT1021DMH-10) 5962-8862201XA (LT1028MH) 5962-8862201PA (LT1028MJ8) 5962-8862202XA (LT1028AMH) 5962-8862202PA (LT1028AMJ8) 5962-8864101RA (LTC1060AMJ) 5962-8864102RA (LTC1060MJ) 5962-8864601XA (LT1085MK) 5962-8864701GA (LT1021BMH-7) 5962-8864702GA (LT1021DMH-7) 5962-8875101VA (LT1039MJ) 5962-8875102EA (LT1039MJ16) 5962-8876001GA (LT1013AMH) 5962-8876001PA (LT1013AMJ8) 5962-8876002GA (LT1013MH) 5962-8876002PA (LT1013MJ8) 5962-8876201GA (LT1021BMH-5) 5962-8876202GA (LT1021CMH-5) 5962-8876203GA (LT1021DMH-5) 5962-8944001CA (LT1032MJ) 5962-8948301LA (LTC1064MJ) 5962-8950401GA (LT1017MH) 5962-8950401PA (LT1017MJ8) 5962-8950402GA (LT1018MH) 5962-8950402PA (LT1018MJ8) 5962-8951101EA (LT1525AJ) 5962-8951102EA (LT1527AJ) 5962-8952101XA (LT1084MK) 5962-8956201GA (LT1054MH) 5962-8956201PA (LT1054MJ8) 5962-8958101GA (REF01AH) 5962-8958101PA (REF01AJ8) 5962-8961001XA (LT1009MH) 5962-8962201GA (LT1022AMH) 5962-8962202GA (LT1022MH) 5962-8967701CA (LT1014AMJ) 5962-8967702CA (LT1014MJ) 5962-8967702XA (LT1014MW) 5962-8978201CA (LTC1052MJ) 5962-8978201GA (LTC1052MH) 5962-8978201PA (LTC1052MJ8) 5962-8980201XA (LT1031BMH) 5962-8980202XA (LT1031CMH) 5962-8980203XA (LT1031DMH) 5962-8983002RA (LTC1290BMJ) 5962-8983003RA (LTC1290CMJ) 5962-8983004RA (LTC1290DMJ) 5962-8987301YA (LT1003MK) 5962-8989701CA (LT1058AMJ) 5962-8989701XA (LT1058AML)

5962-8989702CA (LT1058MJ) 5962-8992101XA (LM129AH) 5962-8992102XA (LM129BH) 5962-8992103XA (LM129CH) 5962-8993301GA (LT1006MH) 5962-8993301PA (LT1006MJ8) 5962-8993302GA (LT1006AMH) 5962-8993302PA (LT1006AMJ8) 5962-8997601GA (LT1055AMH) 5962-8997602GA (LT1056AMH) 5962-8997603GA (LT1055MH) 5962-8997604GA (LT1056MH) 5962-8998101XA (LT1086MK) 5962-8998101YA (LT1086MH) 5962-9050701XA (LM134H-3) 5962-9050702XA (LM134H-6) 5962-9050703XA (LM134H) 5962-9051901XA (LT1029AMH) 5962-9051902XA (LT1029MH) 5962-9054501RA (LTC1045MJ) 5962-9056801CA (0P237AJ) 5962-9056802CA (OP237CJ) 5962-9059501GA (LT1019AMH-10) 5962-9059502GA (LT1019AMH-5) 5962-9059503GA (LT1019AMH-4.5) 5962-9059504GA (LT1019AMH-2.5) 5962-9059505GA (LT1019MH-10) 5962-9059506GA (LT1019MH-5) 5962-9059507GA (LT1019MH-4.5) 5962-9059508GA (LT1019MH-2.5) 5962-9062701GA (LT1011AMH) 5962-9062701PA (LT1011AMJ8) 5962-9062702GA (LT1011MH) 5962-9062702PA (LT1011MJ8) 5962-9064901CA (LTC1064-4MJ) 5962-9064901XA (LTC1064-4ML) 5962-9069301MCA (LTC1064-1MJ/883) 5962-9069302MCA (LTC1064-1AMJ/883) 5962-9073902MXA (LT1084MK-5) 5962-9073903MXA (LT1085MK-5) 5962-9073904MXA (LT1086MK-5) 5962-9081701MXA (LT1057AMH) 5962-9081701MPA (LT1057AMJ8) 5962-9081702MXA (LT1057MH) 5962-9081702MPA (LT1057MJ8) 5962-9082501MYA (LT1070MK) 5962-9082502MYA (LT1071MK) 5962-9082503MYA (LT1072MK) 5962-9082503MPA (LT1072MJ8)

5962-9082504MYA (LT1070HVMK) 5962-9082505MYA (LT1071HVMK) 5962-9082506MYA (LT1072HVMK) 5962-9084101MCA (LT1020MJ) 5962-9084201MGA (LT1012MH) 5962-9084201MPA (LT1012MJ8) 5962-9084202MGA (LT1012AMH) 5962-9084202MPA (LT1012AMJ8) 5962-9159501MPA (LTC1062MJ8) 5962-9161901MPA (LTC1042MJ8) 5962-9163201MCA (LT1079MJ) 5962-9163202MCA (LT1079AMJ) 5962-9163203MCA (LT1078MJ) 5962-9163204MCA (LT1078AMJ) 5962-9163204MXA (LT1078AMH) 5962-9163204MPA (LT1078AMJ8) 5962-9172901MVA (LT1180MJ) 5962-9172902MEA (LT1181MJ) 5962-9172903MVA (LT1280MJ) 5962-9172904MEA (LT1281MJ) 5962-9207901MPA (LT1172MJ8) 5962-9208001MPA (LTC485MJ8) 5962-9305701MPA (LTC1291CMJ8) 5962-9305702MPA (LTC1292CMJ8) 5962-9305703MEA (LTC1293CMJ) 5962-9305704MRA (LTC1294CMJ) 5962-9311901MYA (LT1076MK) 5962-9311902MYA (LT1076HVMK) 5962-9318401MPA (LT1229MJ8) 5962-9318402MCA (LT1230MJ) 5962-9319001MPA (LT1241MJ8) 5962-9319002MPA (LT1242MJ8) 5962-9319003MPA (LT1243MJ8) 5962-9319004MPA (LT1244MJ8) 5962-9319005MPA (LT1245MJ8) 5962-9321201MPA (LT1111MJ8) 5962-9322401MPA (LT1120MJ8) 5962-9323801MCA (LT1125MJ) 5962-9323802MPA (LT1124MJ8) 5962-9323803MCA (LT1125AMJ) 5962-9323804MPA (LT1124AMJ8) 5962-9451601MPA (LT118AJ8) 5962-9460001MGA (LTC1051MH) 5962-9460002MGA (LTC1051AMH) 5962-9470901MPA (LTC1041MJ8) 5962-9862801QPA (LT1126MJ8) 5962-9950101QPA (LTC1150MJ8) 5962-990201QGA (LT1077MH) 5962-990301QPA (LT1101MJ8)

Radiation Hardened

RH07 RH27C RH37C RH101A RH108A RH111 RH117 RH118 RH119 RH129 RH137 RH1009 RH1011 RH1013 RH1014 RH1021-5 RH1021-7

RH1021-10 RH1056 RH1078 RH1079 RH1083 RH1084 RH1085 RH1086

883 Military Parts List

883	LF155AH/883	LM101AH/883	LT1006MH/883	LT1024MD/883	LT1172MJ8/883	OP-05H/883	OP-27BH/883
Operational	LF155H/883	LM101AJ8/883	LT1006MJ8/883	LT1055AMH/883	LT1228MJ8/883	OP-05J8/883	OP-27CH/883
	LF156AH/883	LM107H/883	LT1007AMH/883	LT1055MH/883	LTC1050AMH/883	OP-05AW/883	OP-27CJ8/883
Amplifiers	LF156H/883	LM107J8/883	LT1007AMJ8/883	LT1078AMH/883	LTC1050AMJ8/883	OP-05W/883	OP-37AH/883
	LF156J8/883	LM108AH/883	LT1007MH/883	LT1078AMJ8/883	LTC1050AMJ/883	OP-07AH/883	OP-37AJ8/883
	LF156W/883	LM108H/883	LT1007MJ8/883	LT1078MH/883	LTC1050MH/883	OP-07AJ8/883	OP-37BJ8/883
	LF412AMH/883	LM108AJ8/883	LT1007M36/663	LT1078MJ8/883	LTC1050MJ8/883	OP-07H/883	OP-37CH/883
	LF412MH/883	LT118AH/883	LT1012AMH/883	LT1079AMJ/883	LTC1050MJ/883	OP-07J8/883	OP-37CJ8/883
	LF412AMJ8/883	LT118AJ8/883	LT1012MD/883	LT1079MJ/883	LTC1051AMH/883	OP-15AH/883	OP-227CJ/883
	LF412MJ8/883	LT1001AMH/883	LT1012MH/883	LT1124AMJ8\883	LTC1051AMJ8/883	OP-15BH/883	OP-237AJ/883
	LH0070-0H/883	LT1001AMJ8/883	LT1012MH/883	LT1124MJ8/883	LTC1051MJ8/883	OP-15CH/883	OP-237CJ/883
	LH0070-1H/883	LT1001MH/883	LT1013AMJ8/883	LT1125AMJ8/883	LTC1051MJ6/883	OP-15CJ8/883	OF-237 C3/003
	LH0070-111/883		LT1013MH/883		LTC1052MJ/883	OP-16AH/883	
	LH2108AD/883	LT1001MJ8/883 LT1002AMJ/883	LT1013MJ8/883	LT1125MJ8/883 LT1126AMJ8/883	LTC1052MJ8/883	OP-16AH/883	
	LH2108D/883	LT1002MJ/883				OP-16CH/883	
			LT1014AMJ/883	LT1126MJ8/883	LTC1150MJ8/883 OP-05AH/883		
	LM10H/883 LM10J8/883	LT1006AMH/883 LT1006AMJ8/883	LT1014MJ/883 LT1024AMD/883	LT1127AMJ8/883 LT1127MJ/883	OP-05AJ8/883	OP-16CJ8/883 OP-27BJ8/883	
	LM118H/883	LT1028AMH/883	LT1037AMJ8/883	LT1057AMH/883	LT1058AML/883	LT1191MJ8/833	
883	LM118J8/883	LT1028AMJ8/883	LT1037MH/883	LT1057AMJ8/883	LT1058MJ/883	LT1191MJ8/883	
High Speed	LM118W/883	LT1028MH/883	LT1037MJ8/883	LT1057MH/883	LT1187MJ8/883	LT1193MJ8/883	
Op Amps	LT1022AMH/883	LT1028MJ8/883	LT105/M56/663	LT1057MJ8/883	LT1189MJ8/883	LT1194MJ8/883	
	LT1022MH/883					LT1195MJ8/883	
	L11022WIII/003	LT1037AMH/883	LT1056MH/883	LT1058AMJ/883	LT1190MJ8/883	L11195WJ0/005	
883	LM117H/883	LM137HVK/883	LT117AK/883	LT150AK/883	LT1035MK/883	LT1076HVMK/883	LT1086MH/883
Regulators	LM117HVH/883	LM137K/883	LT123AK/883	LT1003MK/883	LT1036MK/883	LT1083MK-5/883	LT1086MK/883
· ·	LM117HVK/883	LM138K/883	LT137AH/883	LT1005MK/883	LT1054MJ8/883	LT1083MK-12/883	LT1086MK-5/883
	LM117K/883	LM150K/883	LT137AHVH/883	LT1020MJ/883	LT1054MH/883	LT1084MK/883	LT1086MK-12/88
	LM123K/883	LT117AH/883	LT137AHVK/883	LT1026MJ8/883	LT1074MK/883	LT1084MK-5/883	LT1120MJ8/883
	LM137H/883	LT117AHVH/883	LT137AK/883	LT1026MH8/883	LT1074HVMK/883	LT1084MK-12/883	
	LM137HVH/883	LT117AHVK/883	LT138AK/883	LT1033MK/883	LT1076MK/883	LT1085MK/883	
883	LM129AH/883	LM185H-1.2/883	LT581SH/883	LT1019AMH-5/883	LT1021DMH-5/883	LT1031BMH/883	REF-01AJ8/883
References	LM129BH/883	LM185H-2.5/883	LT581TH/883	LT1019AMH-10/883	LT1021BMH-7/883	LT1031CMH/883	REF-01H/883
References	LM129CH/883	LM199AH/883	LT581UH/883	LT1019MH-2.5/883	LT1021DMH-7/883	LT1031DMH/883	REF-01J8/883
	LM134H/883	LM199AH-20/883	LT1004MH-1.2/883	LT1019MH-4.5/883	LT1021BMH-10/883	LT1034BMH-1.2/883	
	LM134H-3/883	LM199H/883	LT1004MH-2.5/883	LT1019MH-5/883	LT1021CMH-10/883	LT1034BMH-2.5/883	
	LM134H-6/883	LT580SH/883	LT1009MH/883	LT1019MH-10/883	LT1021DMH-10/883	LT1034MH-1.2/883	REF-02H/883
	LM136AH-2.5/883	LT580TH/883	LT1003MH/003	LT1021BMH-5/883	LT1029AMH/883	LT1034MH-2.5/883	REF-02J8/883
	LM136H-2.5/883	LT580UH/883	LT1019AMH-4.5/883	LT1021CMH-5/883	LT1029MH/883	REF-01AH/883	NET -0230/003
883	LM111H/883	LM119W/883	LT119AJ/883	LT1011AMJ8/883	LT1016MJ/883	LT1017MJ8/883	
Comparators	LM111J8/883	LT111AH/883	LT685MH/883	LT1011MH/883	LT1016MJ8/883	LT1017M36/863	
Comparators	LM119H/883						
	LM119J/883	LT111AJ8/883 LT119AH/883	LT685MJ/883 LT1011AMH/883	LT1011MJ8/883 LT1016MH/883	LT1016ML/883 LT1017MH/883	LT1018MJ8/883 LTC1042MJ8/883	
000		. =		.=			
883	LT1070MK/883	LT1072MK/883	LT1242MJ8/883	LT1846J/883			
Switched-Mode	LT1070HVMK/883	LT1072HVMK/883	LT1243MJ8/883	LT1847J/883			
Control Circuits	LT1071MK/883 LT1071HVMK/883	LT1072MJ8/883 LT1241MJ8/883	LT1244MJ8/883 LT1245MJ8/883				
883	LT1032MJ/883	LT1080MJ/883	LT1181AMJ/883	LTC485MJ8/883			
Interface	LT1039MJ/883	LT1081MJ/883	LT1280MJ/883	LTC1045MJ/883			
	LT1039MJ16/883	LT1180AMJ/883	LT1281MJ/883				
883	LTC1059MJ/883	LTC1061MJ/883	LTC1064-1AMJ/883	LTC1064-4MJ/883	LTC1164-5MJ/883		
Filters	LTC1060AMJ/883	LTC1062MJ8/883	LTC1064-1MJ/883	LTC1064-4ML/883	LTC1164-7MJ/883		
	LTC1060MJ/883	LTC1063MJ8/883	LTC1064-2MJ/883	LTC1164MJ/883			
	LTC1061AMJ/883	LTC1064MJ/883	LTC1064-2ML/883	LTC1164AMJ/883			
883	L TO4004M4 1/202	LTC1200DM 1/002	LTC4202DM 1/222	LTC1204DM 1/222			
Data	LTC1094MJ/883	LTC1290DMJ/883	LTC1293DMJ/883	LTC1294DMJ/883			
Converters	LTC1290BMJ/883	LTC1293BMJ/883	LTC1294BMJ/883				
Oniverters	LTC1290CMJ/883	LTC1293CMJ/883	LTC1294CMJ/883				
Other 883	LF198AH/883	LT1010MH/883	LTC201AMJ/883	LTC1043MJ/883	LTC1044MJ8/883		
	LF198H/883	LT1010MK/883	LTC1041MJ8/883	LTC1044MH/883			



