


7-01-17

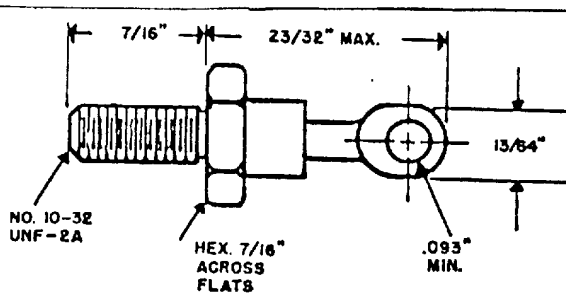

B<sub>V</sub> \_\_\_\_\_

PIV See Chart \_\_\_\_\_

I<sub>O</sub> 6 Amps @ 100 °C Case

I<sub>S</sub> - 200 AMPS

V<sub>f</sub> 1.4 V @ 6 Amps @ 25 °C

I<sub>r</sub> 15 u Amps @ PIV @ 25 °C

3 M amps @ PIV @ 100 °C

STYLE DO 4

STAMP Edal, P/N, Polarity symbol

EQUIV. TO \_\_\_\_\_ EXCEPT \_\_\_\_\_

Reverse recovery time: 300 Nano Sec.  
 Conditions: 1 Amp forward to 4 Amp reverse to 0  
 For reverse polarity add suffix R: Ex. 1N3879R

P/N	PIV (volts)	P/N	PIV(volts)
1N3879	50	1N3882	300
1N3880	100	1N3883	400
1N3881	200		

REV.	DESCRIPTION	BY	DATE

<b>EDAL INDUSTRIES INC.</b> EAST HAVEN, CONN. 06512	DRAWN DV	APP	DATE 4/23/77
	TOLERANCES UNLESS OTHERWISE NOTED		
	FRACTIONS ±      DECIMALS ±		
TITLE Silicon Rectifiers		DWG. NO. 1N3879 - 1N3883	

9000-4161