


4 A Glass Passivated Bridge Rectifier

Features

- Glass Passivated Chip Junction
- Low Forward Voltage Drop
- High Reliability
- Ideal for Printed Circuit Boards
- High temperature soldering guaranteed: 260°C/10 seconds at 5lbs.(2.3kg) tension
- This series is UL recognized under component index, File number E194718
- RoHS compliant

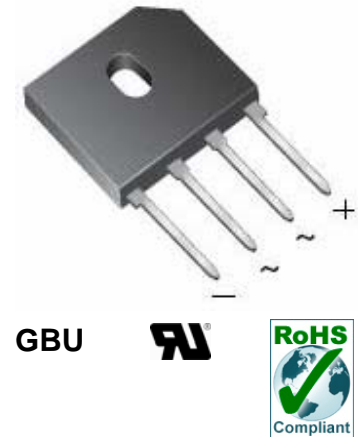

Mechanical Data

Case:	GBU, Epoxy meets UL 94V-0 flammability rating
Terminals:	Leads solderable per MIL-STD-750, Method 2026
Polarity:	Polarity symbols marked on case
Mounting Torque:	5 in. – lbs. max.
Weight:	0.14 ounce, 4.0 grams

Maximum Ratings And Electrical Characteristics (T_{amb}=25°C)

Symbols	Parameter	GBU 4A	GBU 4B	GBU 4D	GBU 4G	GBU 4J	GBU 4K	GBU 4M	Unit	
V _{RRM}	Maximum Repetitive Peak Reverse Voltage	50	100	20	400	600	800	1000	V	
V _{RMS}	Maximum RMS Input Voltage	35	70	140	280	420	560	700	V	
V _{DC}	Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	V	
I _(AV)	Maximum Average Forward Rectified Output Current at	T _C =100°C (Note 2)		4.0					A	
		T _A =40°C (Note 3)		3.0						
I _{FSM}	Peak Forward Surge Current Single Sine-wave Superimposed on Rated Load (JEDEC Method)	150								A
V _F	Maximum Instantaneous Forward Voltage Drop per leg at 4.0A	1.0								V
I _t ²	Rating for Fusing (1ms<t<8.3ms)	93								A ² s

4 A Glass Passivated Bridge Rectifier

GBU4A - GBU4M

Symbols	Parameter	GBU	GBU	GBU	GBU	GBU	GBU	Unit
		4A	4B	4D	4G	4J	4K	
I_R	Maximum DC Reverse Current at Rated DC Blocking Voltage per leg	$T_A=25^\circ\text{C}$		5.0				μA
		$T_A=125^\circ\text{C}$		500				
$R_{\theta JA}$	Typical Thermal Resistance per leg (Note 2)	19				$^\circ\text{C/W}$		
$R_{\theta JC}$	Typical Thermal Resistance per leg (Note 3)	4				$^\circ\text{C/W}$		
T_J, T_{STG}	Operating and Storage Temperature Range	-55 to 150				$^\circ\text{C}$		

Note:

1. Mounted on 40 x 40 x 1.5mm Al. plate
 2. Mounted on PCB at 9.5mm lead length with 12mm² copper pad
 3. Single Phase, half wave, 60 Hz, resistive or inductive load.
- For capacitive load, derate current by 20%

Rating and Characteristic Curves

Fig.1-Derating Curve Output Rectified Current


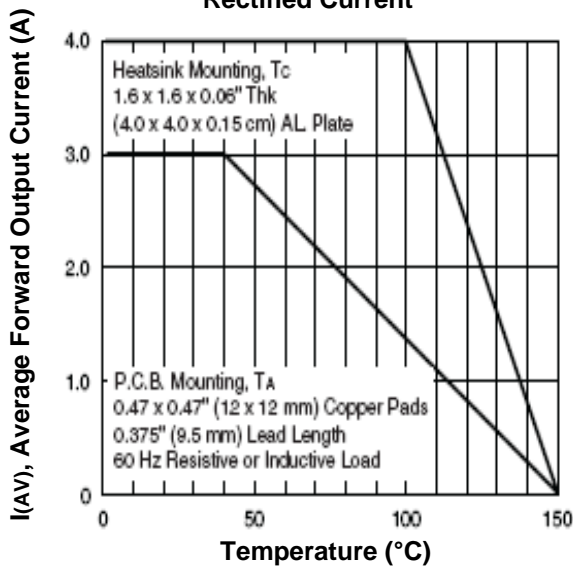


Fig.2-Maximum Non-Repetitive Peak Forward Surge Current per leg

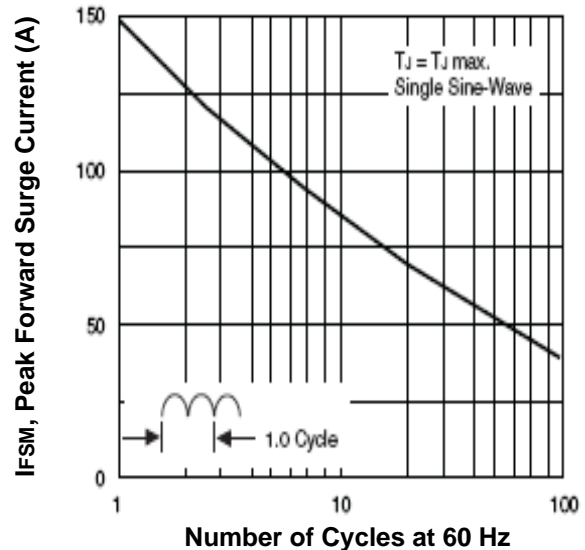

4 A Glass Passivated Bridge Rectifier

GBU4A - GBU4M

Fig.3-Typical Forward Characteristic per leg



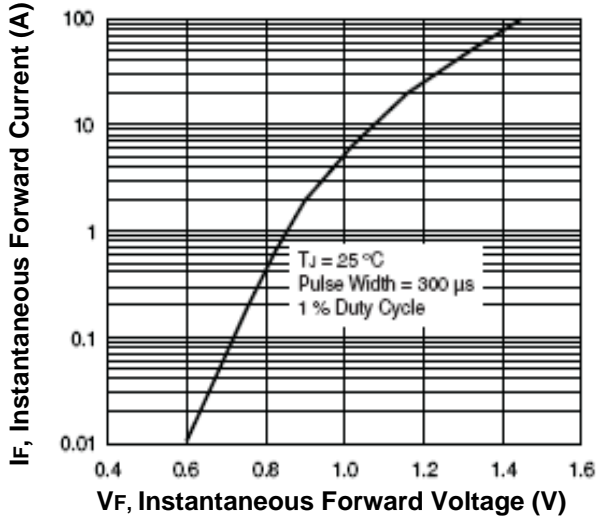


Fig.4-Typical Reverse Characteristics per leg

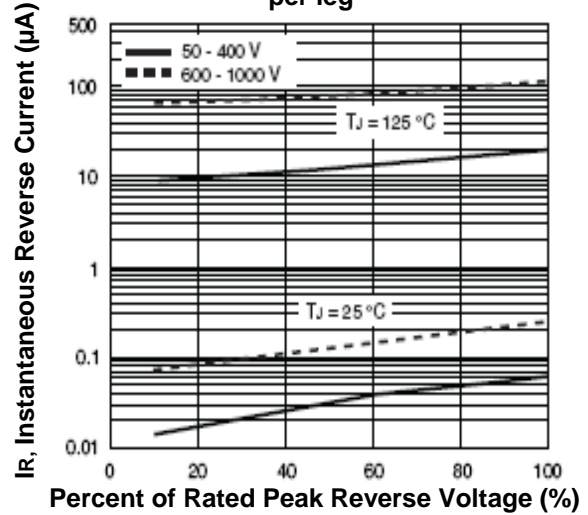

Dimensions in inch (mm)

Case Type GBU

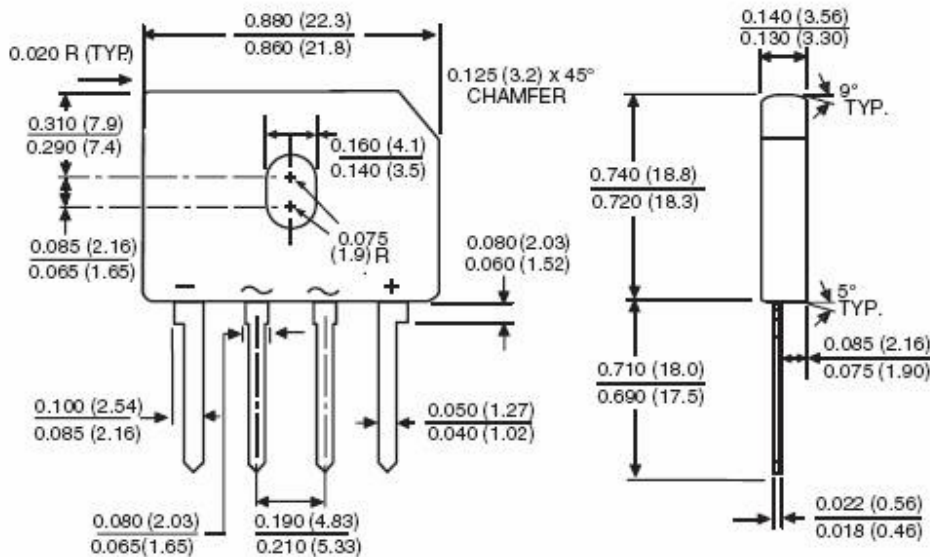

4 A Glass Passivated Bridge Rectifier

GBU4A - GBU4M

How to contact us

US HEADQUARTERS

28040 WEST HARRISON PARKWAY, VALENCIA, CA 91355-4162

Tel: (800) TAITRON (800) 247-2232 (661) 257-6060

Fax: (800) TAITFAX (800) 824-8329 (661) 257-6415

Email: taitron@taitroncomponents.com

Http://www.taitroncomponents.com

TAITRON COMPONENTS MEXICO, S.A .DE C.V.

BOULEVARD CENTRAL 5000 INTERIOR 5 PARQUE INDUSTRIAL ATITALAQUIA, HIDALGO C.P.
42970 MEXICO

Tel: +52-55-5560-1519

Fax: +52-55-5560-2190

TAITRON COMPONENTS INCORPORATED REPRESENTAÇÕES DO BRASIL LTDA

RUA DOMINGOS DE MORAIS, 2777, 2.ANDAR, SALA 24 SAÚDE - SÃO PAULO-SP 04035-001 BRAZIL

Tel: +55-11-5574-7949

Fax: +55-11-5572-0052

TAITRON COMPONENTS INCORPORATED, SHANGHAI REPRESENTATIVE OFFICE

METROBANK PLAZA, 1160 WEST YAN' AN ROAD, SUITE 1503, SHANGHAI, 200052, CHINA

Tel: +86-21-5424-9942

Fax: +86-21-5424-9931