



[PAGE BACK](#) [CLOSE](#)

Product Name **Chip Beads**
Series **MPZ Series**
Type **1608 Type**
Model **t=0.8mm**
Part Number **MPZ1608Y600BTA00**

Product Lifecycle Stage PROD

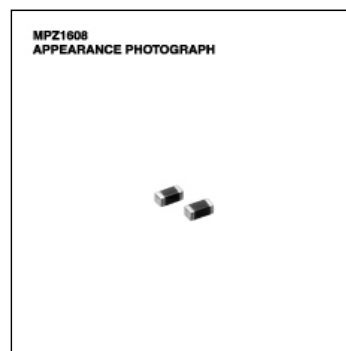

Specification

Mounting Method Flag	Yes	
Processing	MULTI-LAYER	
Shape	Chip	
Number of Circuits	Nom	1
Material Code	Y	
Size Code	1608	
Body Length(L)	Nom	1.6 m m
Body Breadth(W)	Nom	0.8 m m
Body Height(T)	Nom	0.8 m m
Impedance	Min	45 Ohm
Impedance	Nom	60 Ohm
Impedance Tolerance	Min	-25 %
	Max	25 %
Frequency of Impedance	Nom	100 M Hz
Rated Current	Max	2.3 A
DC Resistance	Max	0.03 Ohm
Soldering Method	Reflow,Iron Soldering	
Category Temperature	Min	-55 Cel
Range	Max	125 Cel
Storage Temperature Range	Min	-55 Cel
	Max	125 Cel
Weight	Nom	0.004 g

Summary/Applications/Feature

Summary The MPZ series provide effective EMC suppression in signal lines through simple in-series implementation. It is applicable for lead free soldering.

Applications PC,DVD,CDMA,LCD,Video game

Feature The MPZ series provide effective EMC suppression in signal lines through simple in-series implementation. It is applicable for lead free soldering.

Packaging

Packing	Punched (Paper)Taping [180mm Reel]	
Minimum Package Qty	Nom	4000 Pcs
Minimum Order Qty	Nom	4000 Pcs

[Details](#)

⚠ [Caution]

Specifications which provide more details for the proper and safe use of the described product are available upon request.

⚠ [Notice of Revision and Improve]

All specifications are subject to change without notice.

[PAGE TOP](#)

Copyright(c) 1996-2008 All rights reserved.